

---

# ASSEMBLY INSTRUCTIONS

Playground equipment · Item no. W-A015P



|                            |                                           |
|----------------------------|-------------------------------------------|
| <b>Test standard:</b>      | EN 1176-1, EN 1176-3                      |
| <b>Overall dimensions:</b> | 925 × 519 × 355 cm                        |
| <b>Weight:</b>             | 645 kg (net) / 625 kg (gross)             |
| <b>Age group:</b>          | 3 to 14 years · max. 2 children at a time |

---

## WISDOM Education Europe GmbH

schönherr.fabrik · Schönherrstraße 8 · 09113 Chemnitz · Germany  
Phone: +49 (0) 37360 488 999 · E-mail: [hello@wisdomeurope.eu](mailto:hello@wisdomeurope.eu)  
[www.wisdomeurope.eu](http://www.wisdomeurope.eu)

## Product information

---

|                                 |                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------|
| <b>Description:</b>             | Playground equipment (WiseKidz Play Tower (Coloured))                                         |
| <b>Item no.:</b>                | W-A015P                                                                                       |
| <b>Imported into the EU by:</b> | WISDOM Education Europe GmbH, schönherr.fabrik,<br>Schönherrstraße 8, 09113 Chemnitz, Germany |
| <b>Manufacturer:</b>            | ATA School Supplies Co., Ltd.                                                                 |
| <b>Manufacturer address:</b>    | Building 4, Lane 2777, Baoan Road, Malu Town,<br>Jiading District, Shanghai, China            |
| <b>Test standard:</b>           | EN 1176-1, EN 1176-3                                                                          |
| <b>Overall dimensions:</b>      | 925 × 519 × 355 cm                                                                            |
| <b>Weight:</b>                  | 645 kg (net) / 625 kg (gross)                                                                 |
| <b>Minimum space:</b>           | 123.6 × 881 cm                                                                                |

## Assembly notes

---

1. Ensure the area is safe and free of hazards prior to assembly. The minimum space required is 123.6 × 881 cm.
2. A minimum of two adults is required for assembly.
3. The product and materials are intended for indoor or outdoor use under supervision.
4. Before assembly, check the number of parts against the parts list (hardware packages of the individual assembly steps).
5. When assembling, ensure the ground is impact-attenuating or protected by soft material (e.g. cardboard or a blanket) to avoid scratching the equipment.
6. Tighten all bolts firmly after assembly.
7. Remove all assembly materials and tools from the play area before use.
8. Keep children away from the product as long as it is not fully assembled, as well as during disassembly or maintenance work.
9. The product can be installed in two ways: surface mounting on concrete with expansion bolts, or inground installation (set in concrete). Both options are shown in these instructions.

## Safety and usage instructions

---

1. Read the instructions and warning labels carefully before use.
2. Inspect the equipment and play area for potential hazards before each use.
3. Maximum number of simultaneous users: 2.
4. Age group: 3 to 14 years.
5. Never leave children unattended. Constant adult supervision is required.
6. Ensure the surroundings are safe before use. Do not use the equipment in bad weather.
7. Anchoring notes: check monthly that all fixings are tight - the expansion bolts for surface mounting, and the firm seating of the equipment in its foundation for inground installation. Retighten or replace loose connections in good time.
8. Do not climb beyond the intended surfaces. Use the slide only seated, feet first.
9. If material is damaged and needs repair, contact the manufacturer or importer for repair or replacement.
10. The ground must be level (horizontal) during assembly and remain level throughout the entire period of use.

## Cleaning and maintenance

---

1. Clean with a damp cloth.
2. Use only neutral cleaning agents.
3. Inspect the product regularly.
4. Carry out inspections according to the inspection schedule at the end of these instructions.
5. Complete the inspection record after each inspection.

# W-A015P






**Wisdom Education Europe GmbH**  
Drosselweg 10, 09526 Olbernhau,  
Germany

[www.wisdomeurope.eu](http://www.wisdomeurope.eu)  
Test standard: EN 1176-1, EN 1176-3  
Item Code: W-A015P  
Year of manufacture: 2026

This nameplate shall be installed at any lower position on the panel.



16h




[cm]







1223.6 cm

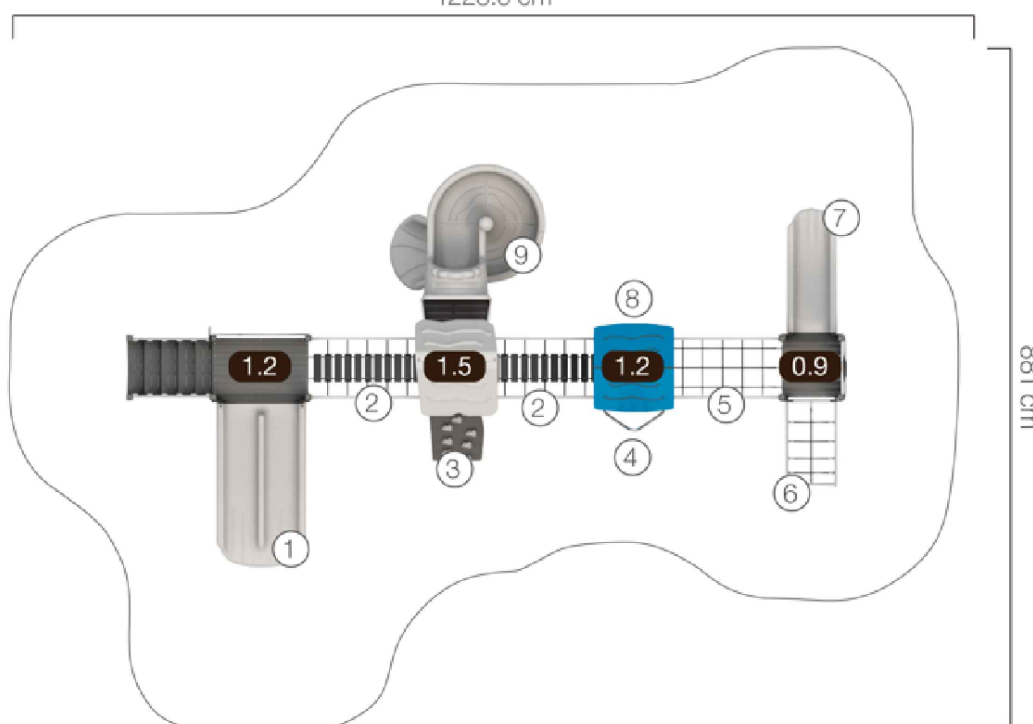

### Activities: 9


- |                                  |                              |                                   |
|----------------------------------|------------------------------|-----------------------------------|
| ① 120cm Double Slide             | ② Inclined Step Board Bridge | ③ 150cm PE Rock Climber           |
| ④ 120cm Stainless Fireman's Pole | ⑤ Inclined Net Bridge        | ⑥ 90cm Stainless Arch Net Climber |
| ⑦ 90cm Single Slide              | ⑧ PE Flip-over Game Panel    | ⑨ Spiral Slide                    |

[cm]

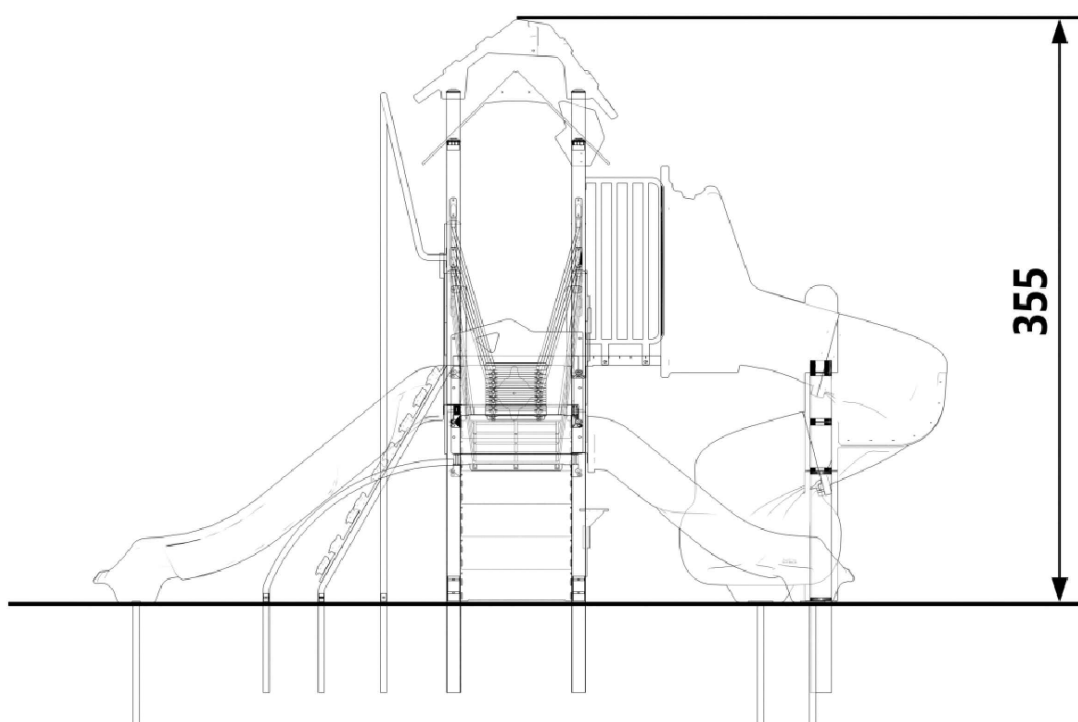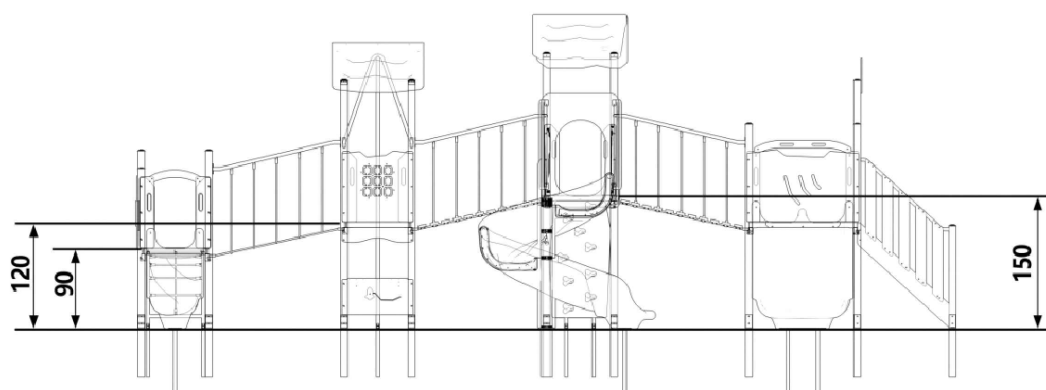


[cm]

## Site Layout

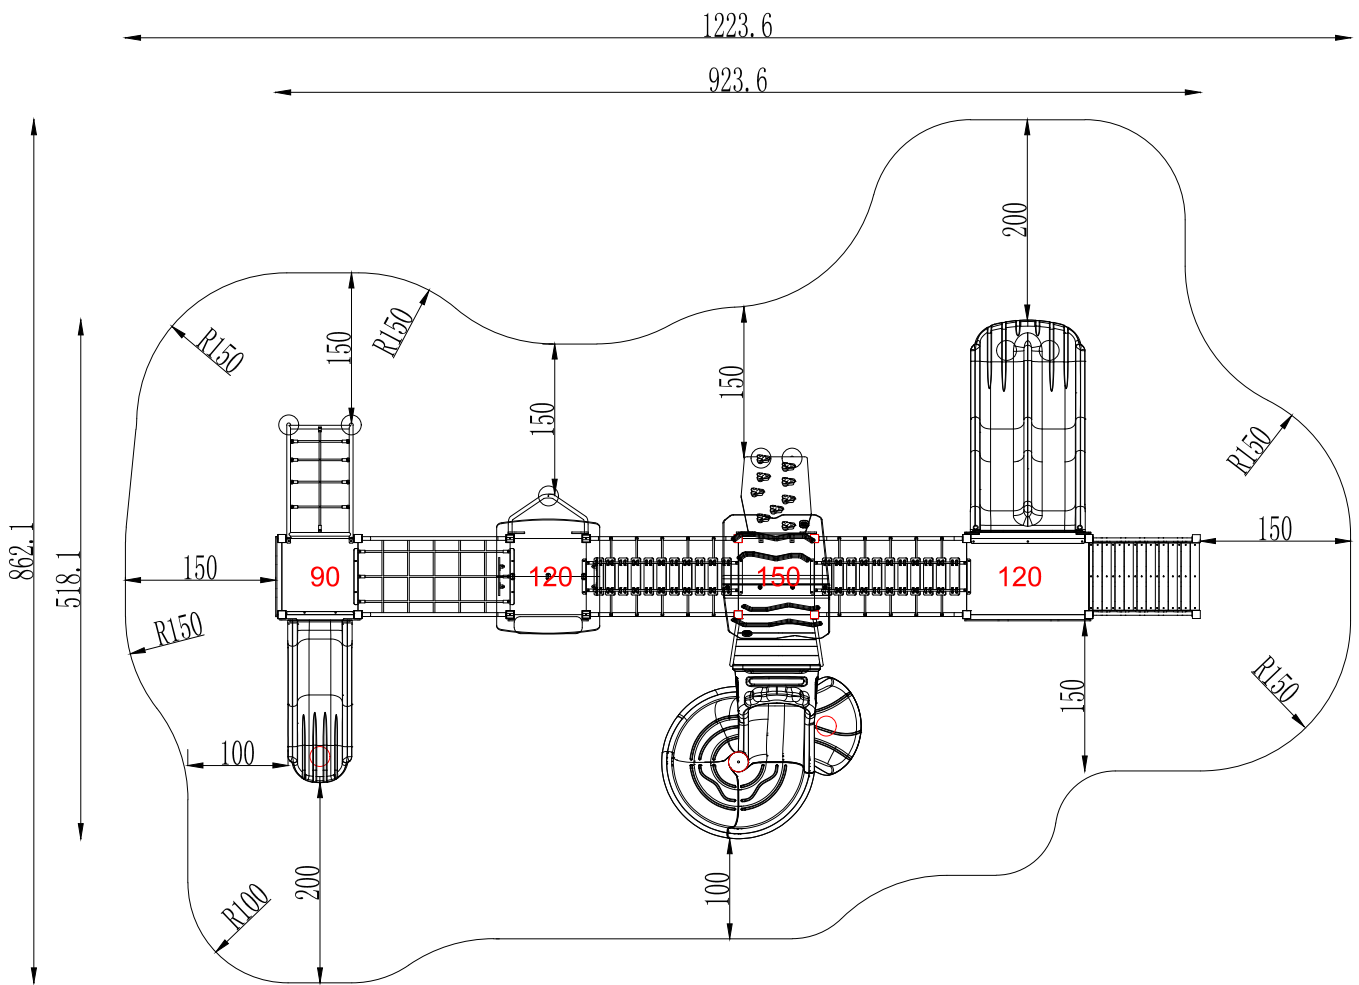


[cm]

# Footing Diagram

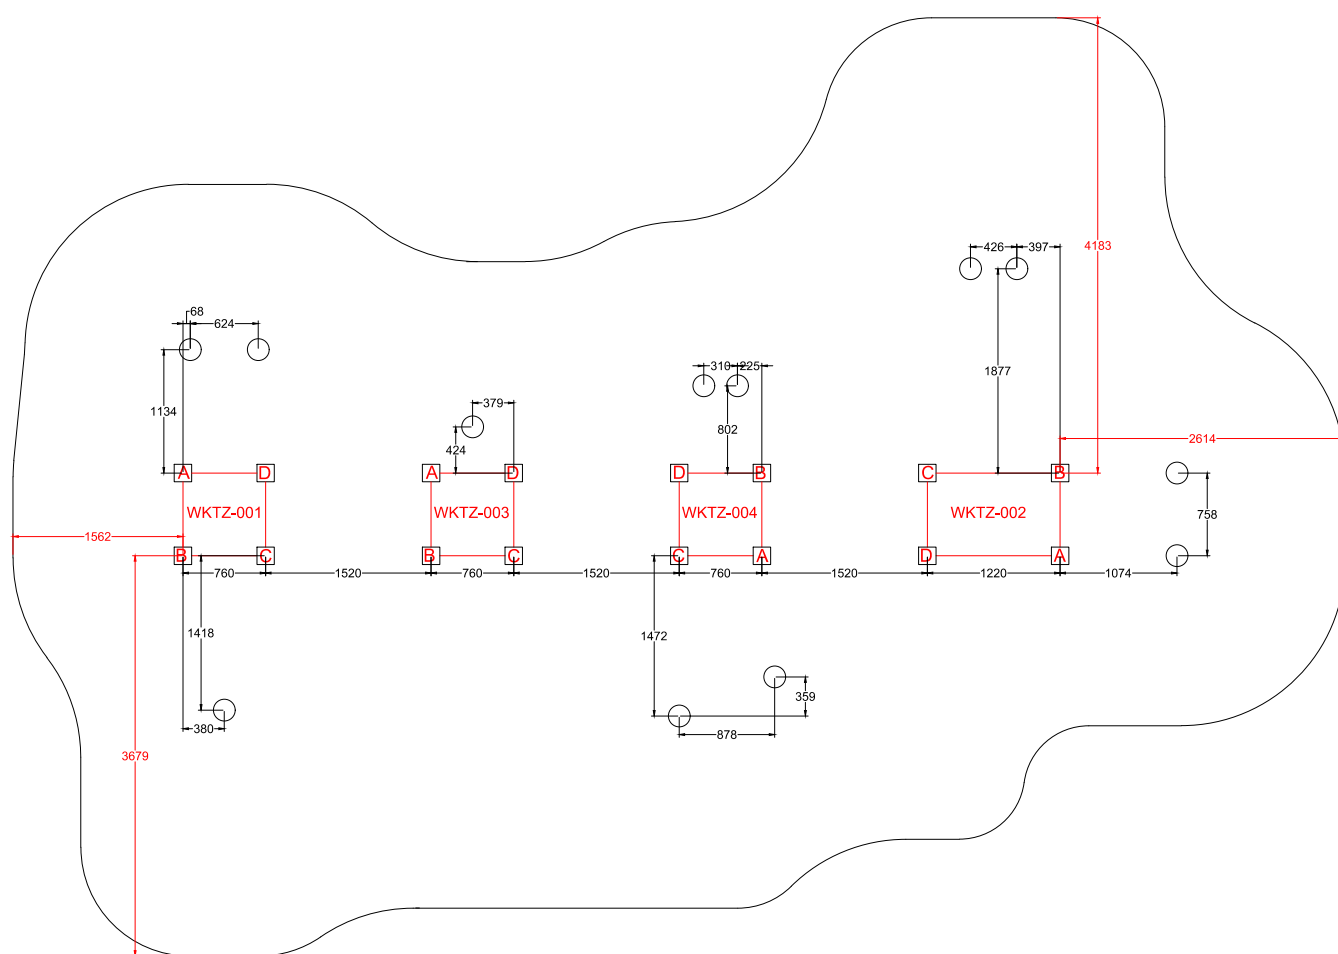


[mm]

# Surface Mounted Installation

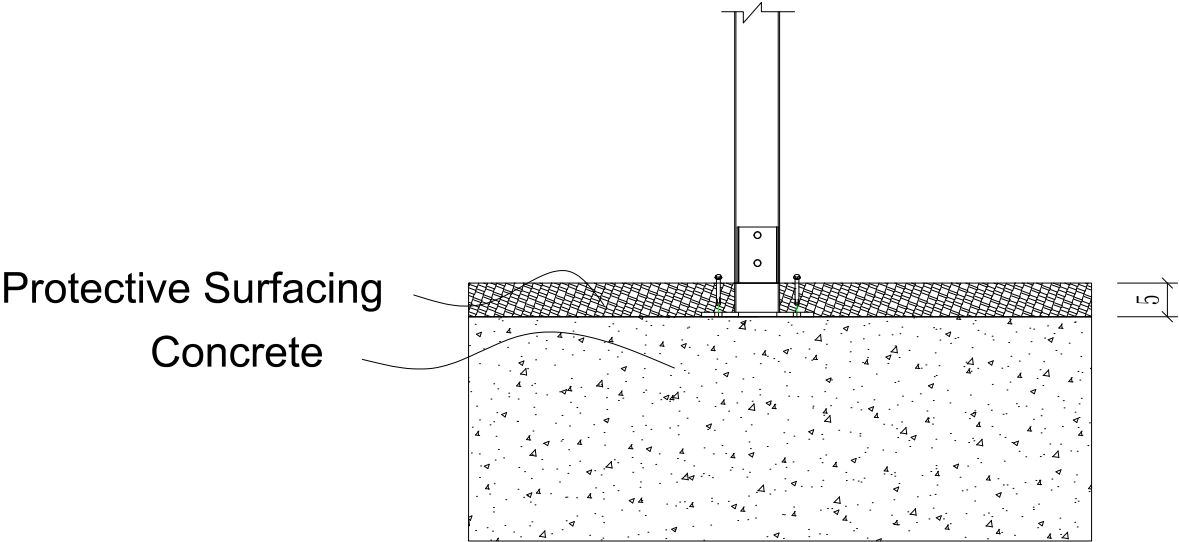

# Inground Installation

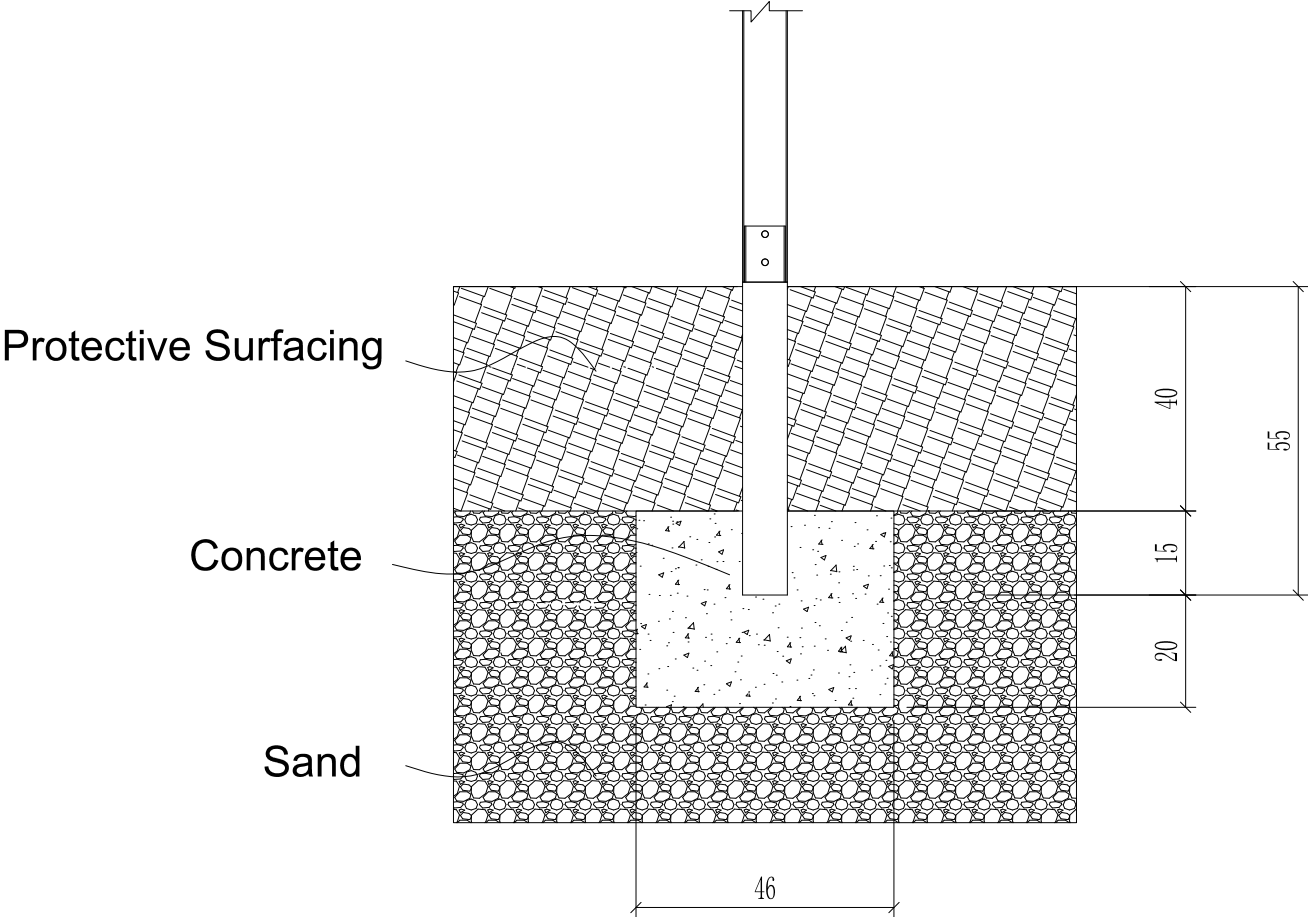

[cm]

## Parts List

| No. | Item             | Description                                                               | Picture                                                                               | Qty |  |
|-----|------------------|---------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----|--|
| 1   | 35-210017H55-111 | 127 *H2020mm 150cm Spiral Slide Middle Axle Inground Footer H55cm (Brown) |    | 1   |  |
| 2   | 63-WK001         | WiseKidz - 90cm Stainless Arch Net Climber                                |    | 1   |  |
| 3   | 63-WK006-131     | WiseKidz - 150cm PE Rock Climber (Midnight)                               |    | 1   |  |
| 4   | 63-WK014         | WiseKidz - 120cm Stainless Fireman's Pole                                 |    | 1   |  |
| 5   | 64-WK001-131     | WiseKidz - WPC Deck (Midnight)                                            |    | 3   |  |
| 6   | 64-WK003-131     | WiseKidz - WPC Rectangle Deck 760-1220mm (Midnight)                       |    | 1   |  |
| 7   | 64-WK005-131     | WiseKidz - Spiral Slide Deck (Midnight)                                   |    | 1   |  |
| 8   | 65-21055-10      | Spiral Slide 90° Turn Chute (Silver Gray)                                 |  | 1   |  |
| 9   | 65-21056-10      | Spiral Slide Exit Chute (Silver Gray)                                     |  | 1   |  |
| 10  | 65-21057-10      | Spiral Slide Hood (Silver Gray)                                           |  | 1   |  |
| 11  | 65-WKP001A-10    | WiseKidz - 90cm Single Slide (Silver Gray)                                |  | 1   |  |
| 12  | 65-WKP005A-10    | WiseKidz - 120cm Double Slide (Silver Gray)                               |  | 1   |  |
| 13  | 66-WK001-128129  | WiseKidz - PE Single Slide Hood (True Blue & Garnet)                      |  | 1   |  |
| 14  | 66-WK002-128129  | WiseKidz - PE Climber Entry (True Blue & Garnet)                          |  | 3   |  |
| 15  | 66-WK006-128129  | WiseKidz - PE Clock & Direction Panel (True Blue & Garnet)                |  | 1   |  |
| 16  | 66-WK010-121129  | WiseKidz - PE Flip-over Game Panel (Orange & Garnet)                      |  | 1   |  |

|    |                  |                                                                                                       |                                                                                       |    |  |
|----|------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----|--|
| 17 | 66-WK012-121128  | WiseKidz - PE Counter Panel Roof (Orange & True Blue)                                                 |    | 1  |  |
| 18 | 66-WK013-121128  | WiseKidz - PE Counter Panel (Orange & True Blue)                                                      |    | 1  |  |
| 19 | 66-WK030-10      | WiseKidz - Spiral Slide Deck Metal Barrier (Silver Gray)                                              |    | 1  |  |
| 20 | 66-WK031-128129  | WiseKidz - PE Safety Panel 1220mm (True Blue & Garnet)                                                |    | 1  |  |
| 21 | 66-WK032-128129  | WiseKidz - PE Double Slide Hood (True Blue & Garnet)                                                  |    | 1  |  |
| 22 | 67-WK003-10      | WiseKidz - 300mm Inclined Step Board Bridge L1520mm (Silver Gray)                                     |    | 2  |  |
| 23 | 67-WK007-10      | WiseKidz - 300mm Inclined Net Bridge L1520mm (Silver Gray)                                            |    | 1  |  |
| 24 | 68-WK001-128129  | WiseKidz - 120cm PE Stairs w/Handrails (True Blue & Garnet)                                           |    | 1  |  |
| 25 | 69-WK001-128131  | WiseKidz - PE Gable Roof (True Blue)                                                                  |  | 1  |  |
| 26 | 69-WK002-10      | WiseKidz - Style Gable Roof (Silver Gray)                                                             |  | 1  |  |
| 27 | 70-21001-131     | Single Slide Inground Footer (Midnight)                                                               |  | 2  |  |
| 28 | 70-21002-131     | Double Slide Inground Footer (Midnight)                                                               |  | 1  |  |
| 29 | 70-WK002-V55-131 | WiseKidz - Steel Post Inground Footer H55cm                                                           |  | 18 |  |
| 30 | 70-WK005-V55-10  | WiseKidz - 38mm Post Inground Footer H55cm (Silver Gray)                                              |  | 5  |  |
| 31 | 72-WK001-128129  | WiseKidz - Post Topper (True Blue & Garnet)                                                           |  | 1  |  |
| 32 | WKTZ-001-131     | 80*80*H1992mm(3pcs)+H1792mm(1pc) WiseKidz - Galvanized Steel Post Set 900mm Deck w/o Roof (Midnight)  |  | 1  |  |
| 33 | WKTZ-002-131     | 80*80*H2292mm(3pcs)+H2792mm(1pc) WiseKidz - Galvanized Steel Post Set 1200mm Deck w/o Roof (Midnight) |  | 1  |  |
| 34 | WKTZ-003-131     | 80*80*H2792mm(4pcs) WiseKidz - Galvanized Steel Post Set 1200mm Deck w/Roof (Midnight)                |  | 1  |  |


|    |              |                                                                                              |                                                                                     |   |  |
|----|--------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---|--|
| 35 | WKTZ-004-131 | 80*80*H3092mm(4pcs) WiseKidz -<br>Galvanized Steel Post Set 1500mm<br>Deck w/Roof (Midnight) |  | 1 |  |
|----|--------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---|--|




## Hardware List

| No. | Item          | Description                                                   | Qty |  |
|-----|---------------|---------------------------------------------------------------|-----|--|
| 1   | 63-WK001WJB   | WiseKidz - 90cm Stainless Arch Net Climber - Hardware Package | 1   |  |
| 2   | 63-WK006WJB   | WiseKidz - 150cm PE Rock Climber - Hardware Package           | 1   |  |
| 3   | 63-WK014WJB   | WiseKidz - 120cm Stainless Fireman's Pole - Hardware Package  | 1   |  |
| 4   | 64-WK001WJB   | WiseKidz - WPC Square Deck 760mm - Hardware Package           | 3   |  |
| 5   | 64-WK003WJB   | WiseKidz - WPC Rectangle Deck 760-1220mm - Hardware Package   | 1   |  |
| 6   | 64-WK005WJB   | WiseKidz - Spiral Slide Deck (Midnight)- Hardware Package     | 1   |  |
| 7   | 65-21055WJB   | Spiral Slide 90°Turn Chute - Hardware Package                 | 1   |  |
| 8   | 65-21056WJB   | Spiral Slide Exit Chute - Hardware Package                    | 1   |  |
| 9   | 65-21057WJB   | Spiral Slide Hood - Hardware Package                          | 1   |  |
| 10  | 65-WKP001AWJB | WiseKidz - 90cm Single Slide - Hardware Package               | 1   |  |
| 11  | 65-WKP005AWJB | WiseKidz - 4ft Double Slide - Hardware Package                | 1   |  |
| 12  | 66-WK001WJB   | WiseKidz - PE Single Slide Hood - Hardware Package            | 1   |  |
| 13  | 66-WK002WJB   | WiseKidz - PE Climber Entry - Hardware Package                | 3   |  |
| 14  | 66-WK006WJB   | WiseKidz - PE Clock & Direction Panel - Hardware Package      | 1   |  |
| 15  | 66-WK010WJB   | WiseKidz - PE Flip-over Game Panel - Hardware Package         | 1   |  |
| 16  | 66-WK012WJB   | WiseKidz - PE Counter Panel Roof - Hardware Package           | 1   |  |

|    |                 |                                                                             |           |  |
|----|-----------------|-----------------------------------------------------------------------------|-----------|--|
| 17 | 66-WK013WJB     | WiseKidz - PE Counter Panel - Hardware Package                              | 1         |  |
| 18 | 66-WK030WJB     | WiseKidz - Spiral Slide Deck Metal Barrier (Silver Gray) - Hardware Package | 1         |  |
| 19 | 66-WK031WJB     | WiseKidz - PE Safety Panel 1220mm (Tan & Lime) - Hardware Package           | 1         |  |
| 20 | 66-WK032WJB     | WiseKidz - PE Double Slide Hood (Tan & Lime) - Hardware Package             | 1         |  |
| 21 | 67-WK003WJB     | WiseKidz -300mm Inclined Step Board Bridge L1520mm - Hardware Package       | 2         |  |
| 22 | 67-WK007WJB     | WiseKidz - 300mm Inclined Net Bridge L1520mm - Hardware Package             | 1         |  |
| 23 | 68-WK001WJB     | WiseKidz - 120cm PE Stairs w/Handrails - Hardware Package                   | 1         |  |
| 24 | 69-WK001WJB     | WiseKidz - PE Gable Roof - Hardware Package                                 | 1         |  |
| 25 | 69-WK002WJB     | WiseKidz - Style Gable Roof - Hardware Package                              | 1         |  |
| 26 | 70-21001WJB     | Single Slide Inground Footer -Hardware Package                              | 2         |  |
| 27 | 70-21002WJB     | Double Slide Inground Footer - Hardware Package                             | 1         |  |
| 28 | 70-WK002-V55WJB | WiseKidz - Steel Post Inground Footer H55cm - Hardware Package              | 18        |  |
| 29 | 70-WK005-V55WJB | Wise Kidz - 38mm Post Inground Footer H55cm - Hardware Package              | 5         |  |
| 30 | 72-WK001WJB     | WiseKidz - Post Topper - Hardware Package                                   | 1         |  |
|    |                 | Gand total                                                                  | <b>57</b> |  |

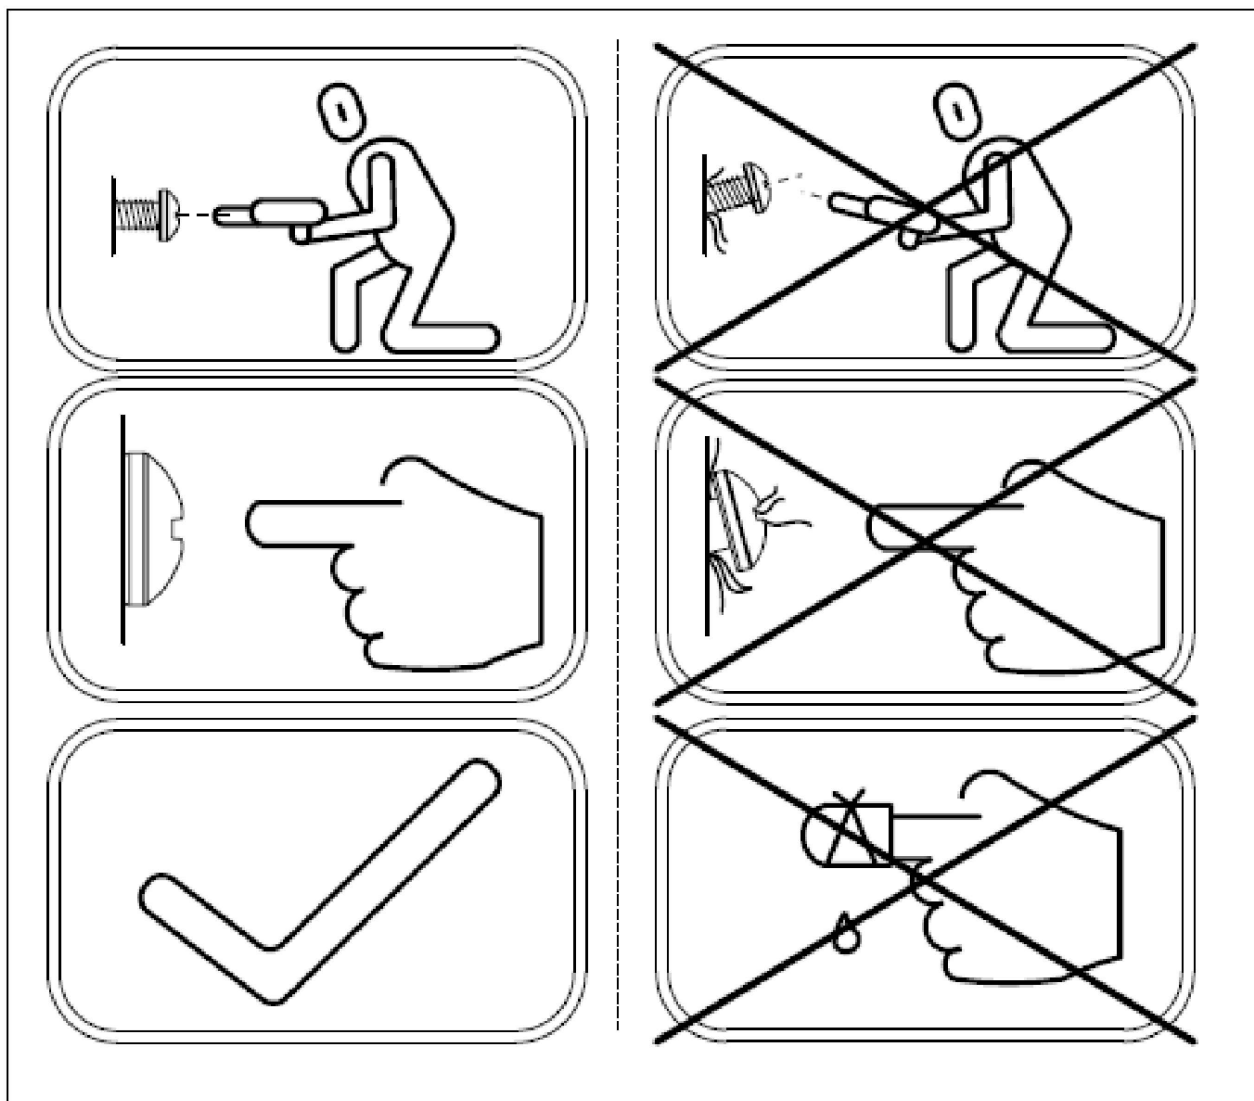

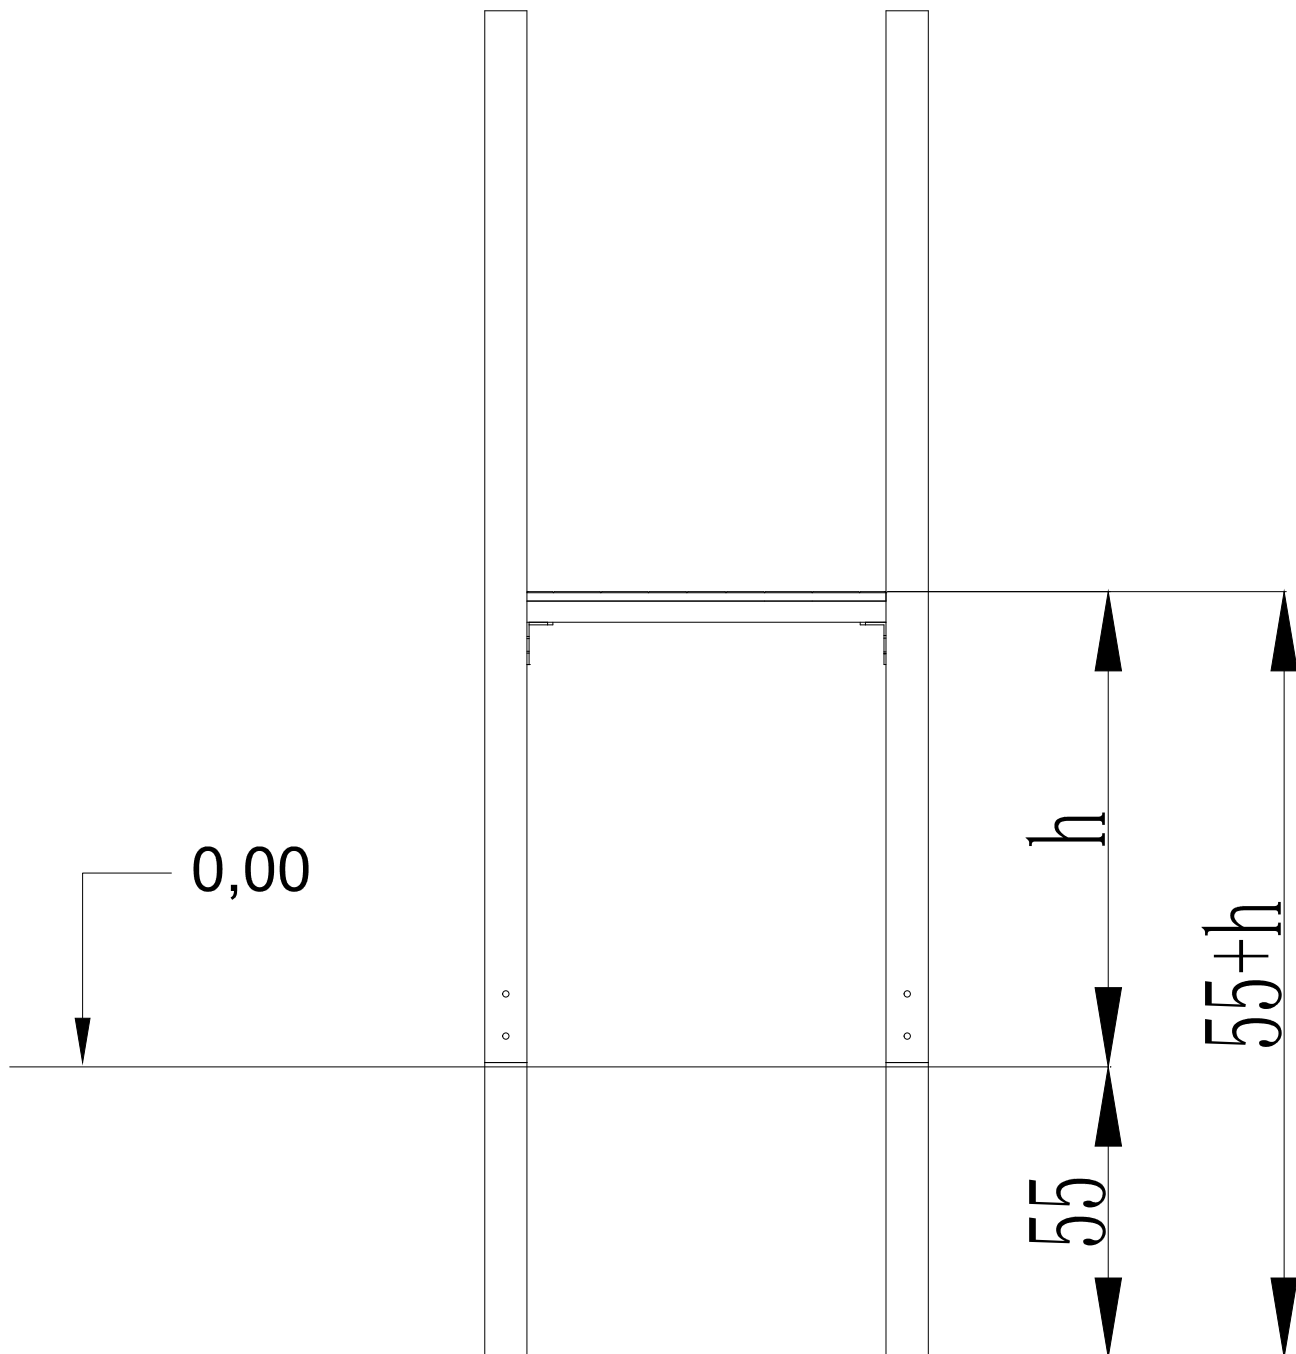

[cm]


## Installation Steps:

1: As shown in the figure, connect the post to the surface mount plate, and connect and fasten them with the corresponding hardware.

2: Use expansion bolts to connect the installed post and surface mount plate to the ground.


### 70-WK002-V55 WiseKidz - Steel Post Inground Footer H55cm

| Number | Name                       | Model        | Quantity |
|--------|----------------------------|--------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M10*120      | 2        |
| 2      | FLAT WASHER                | 10.5/25*T1.5 | 4        |
| 3      | LOCK NUT                   | M10          | 2        |
| 4      | PLASTIC CAP                | φ34 M10      | 2        |

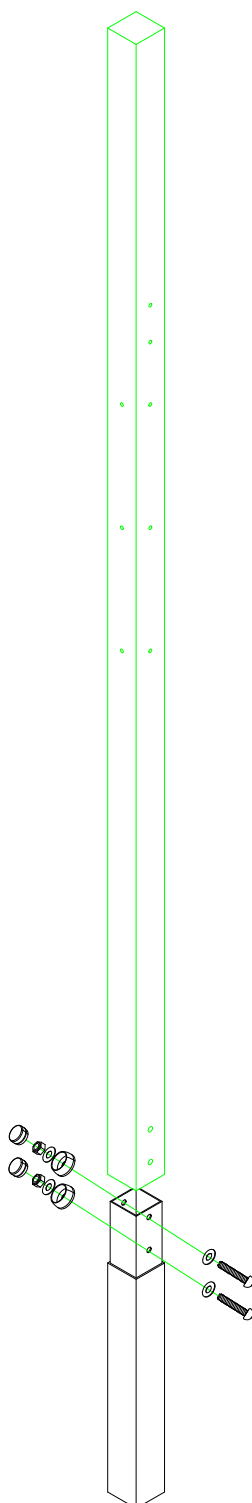

# Post Position Diagram

64-WK001 WiseKidz - WPC Deck

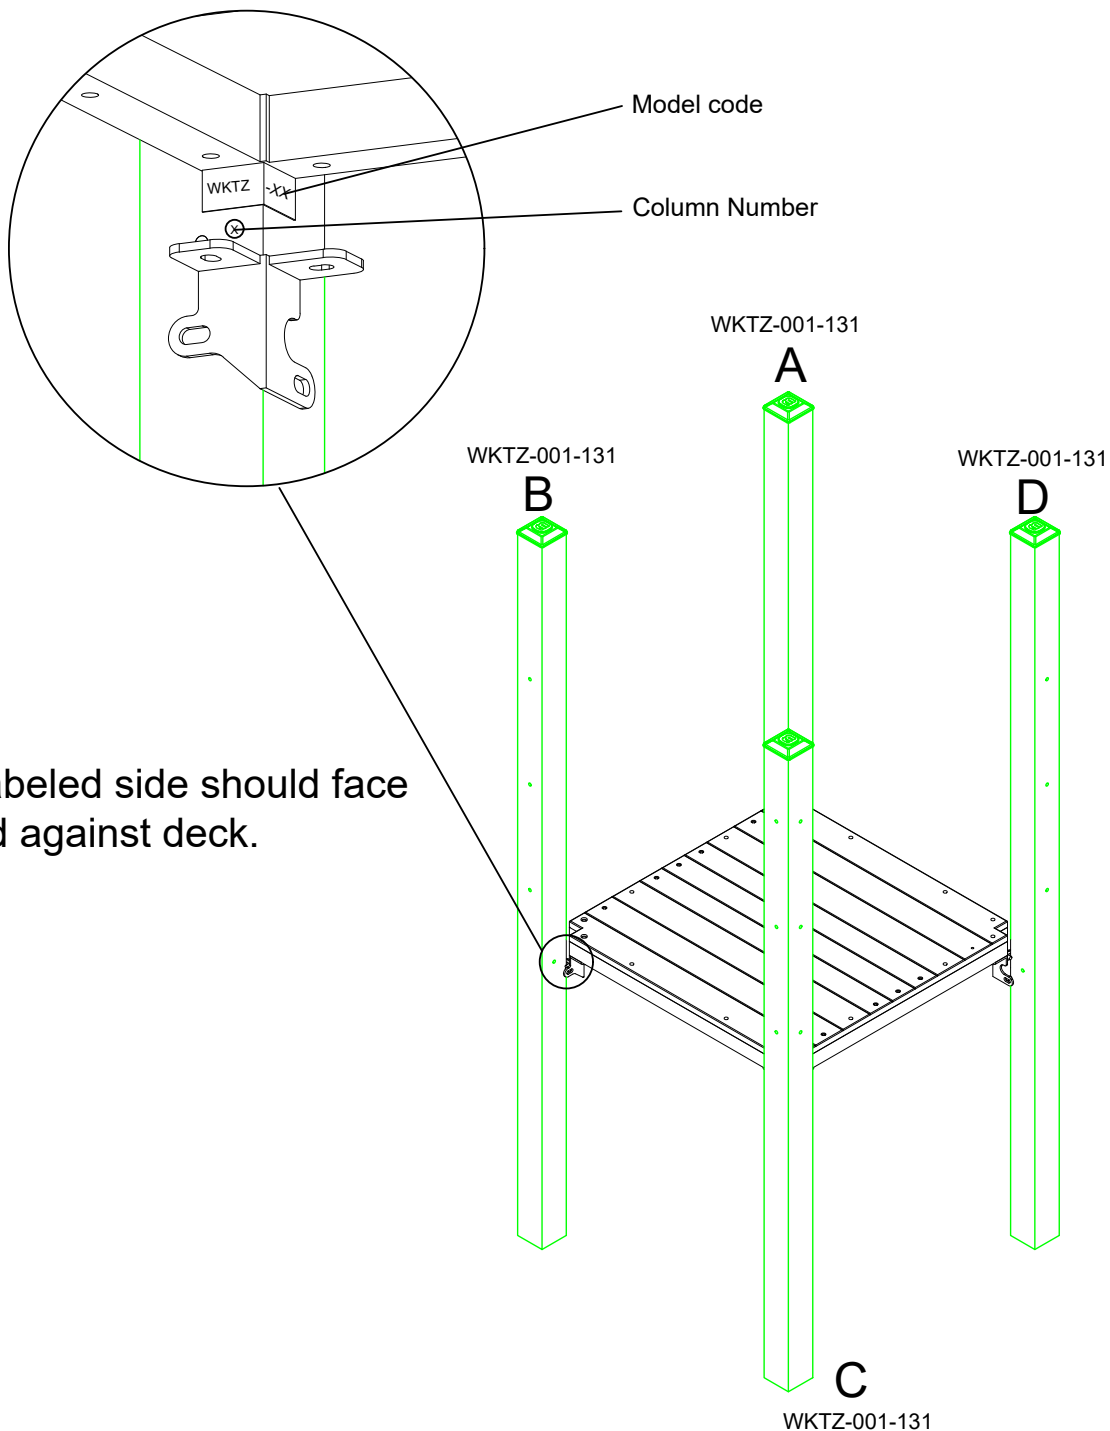


# Installation Steps:

1: Use custom corner braces to align the connection holes of the deck and the post, then use corresponding hardware to connect and fasten them.

## 64-WK001 WiseKidz - WPC Deck

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*70         | 8        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 8        |
| 3      | LOCK NUT                   | M8            | 8        |
| 4      | PLASTIC CAP                | Ø10*34        | 8        |
| 5      | TAMPER RESISTANT TORX-BOLT | M8*25         | 8        |

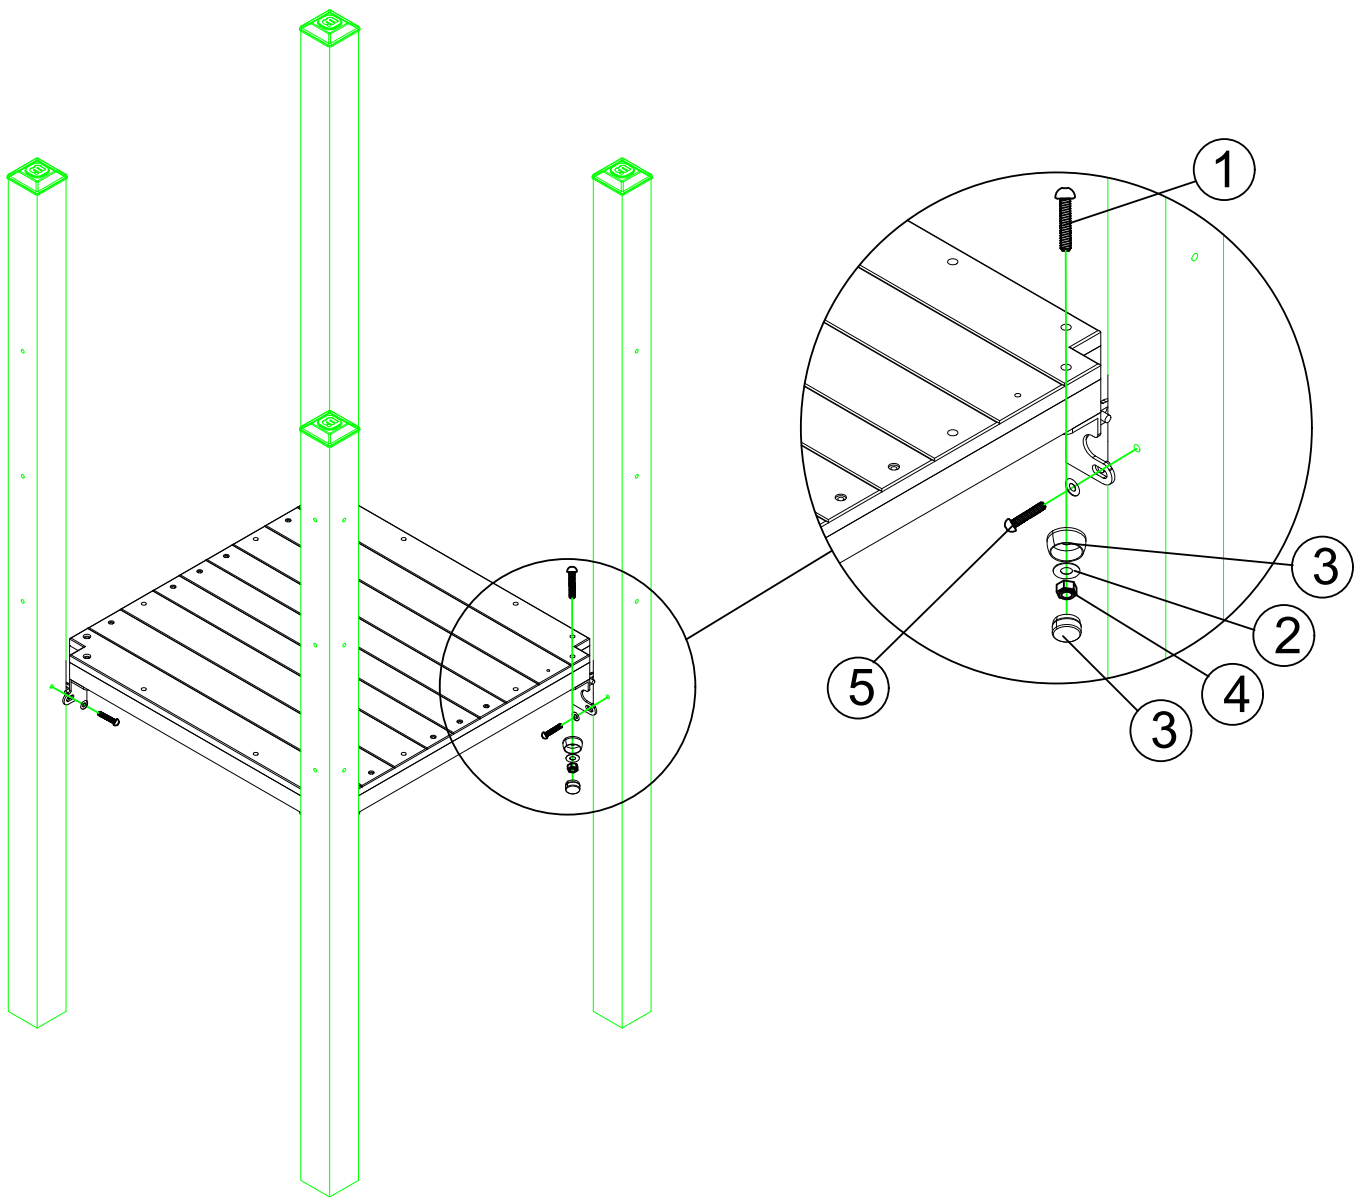


## Installation Steps:

1: Use custom corner braces to align the connection holes of the deck and the post, then use corresponding hardware to connect and fasten them.

### 64-WK003 WiseKidz - WPC Rectangle Deck 760-1042mm

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*70         | 8        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 8        |
| 3      | LOCK NUT                   | M8            | 8        |
| 4      | PLASTIC CAP                | Ø34 M10       | 8        |
| 5      | TAMPER RESISTANT TORX-BOLT | M8*25         | 8        |

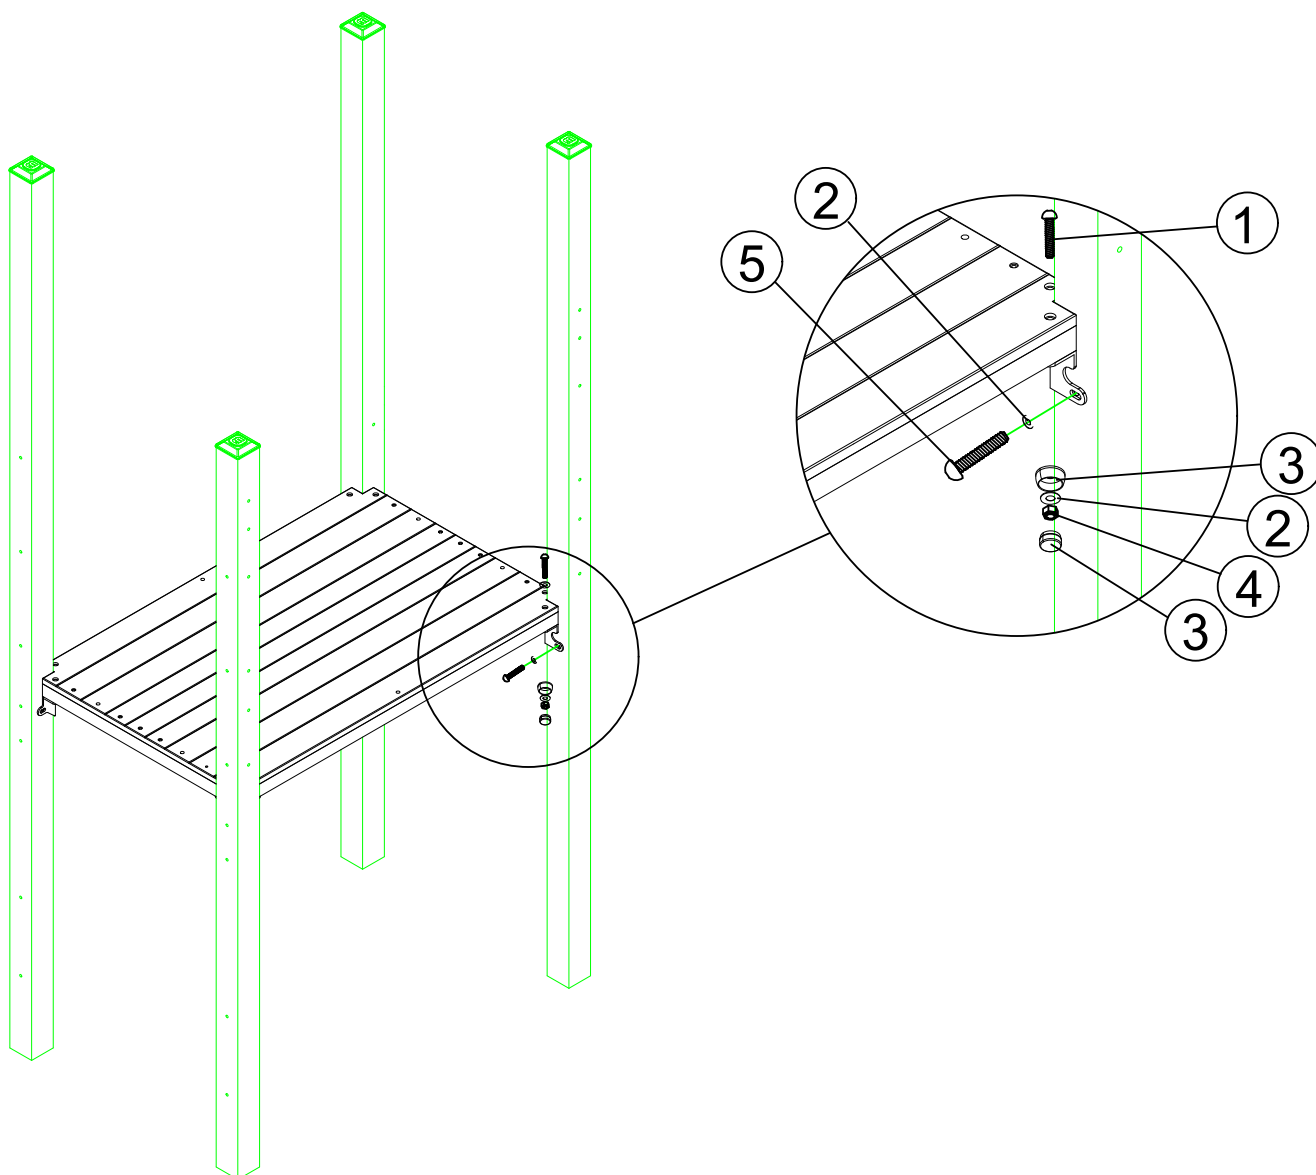




## Installation Steps:

**1: Use custom corner braces to align the connection holes of the deck and the post, then use corresponding hardware to connect and fasten them.**

### 64-WK005-131 WiseKidz - Spiral Slide Deck


| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*75         | 4        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 10       |
| 3      | PLASTIC CAP                | φ34 M10       | 4        |
| 4      | LOCK NUT                   | M8            | 4        |
| 5      | TAMPER RESISTANT TORX-BOLT | M8*25         | 2        |

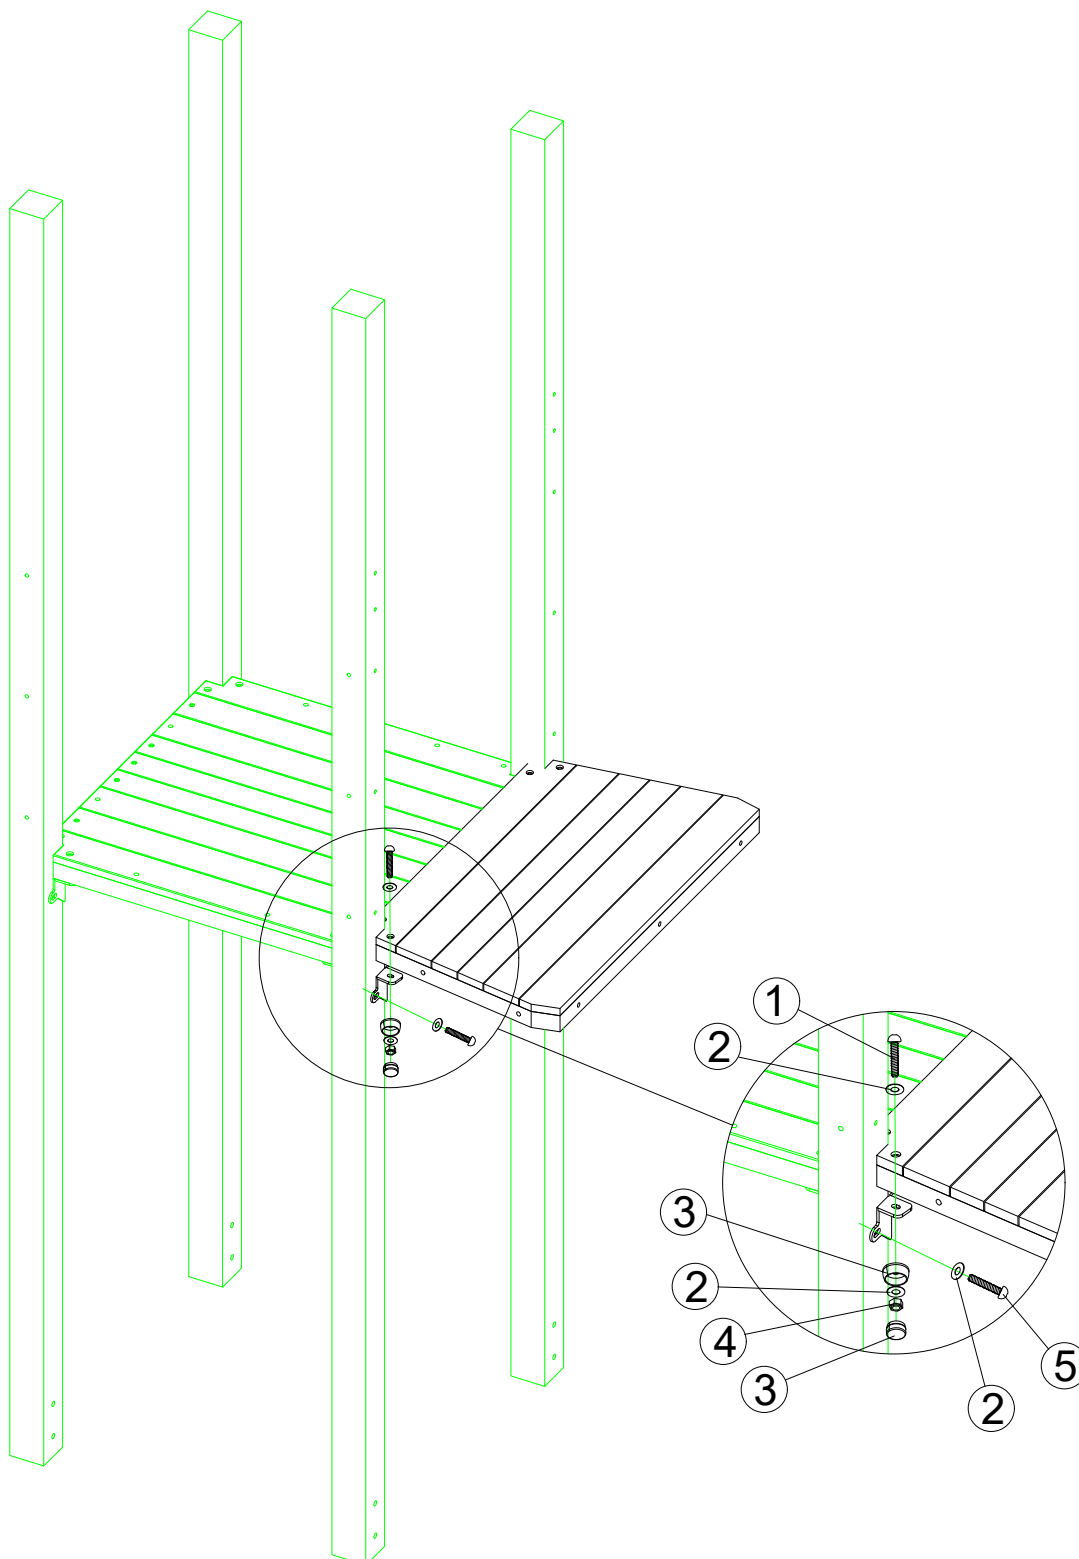

# Installation Steps:

**1: Align the holes of the railing with those on the post and platform, then use corresponding hardware to fasten.**

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*25         | 4        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 12       |
| 3      | PLASTIC CAP                | φ34 M10       | 4        |
| 4      | LOCK NUT                   | M8            | 4        |
| 5      | TAMPER RESISTANT TORX-BOLT | M8*60         | 4        |

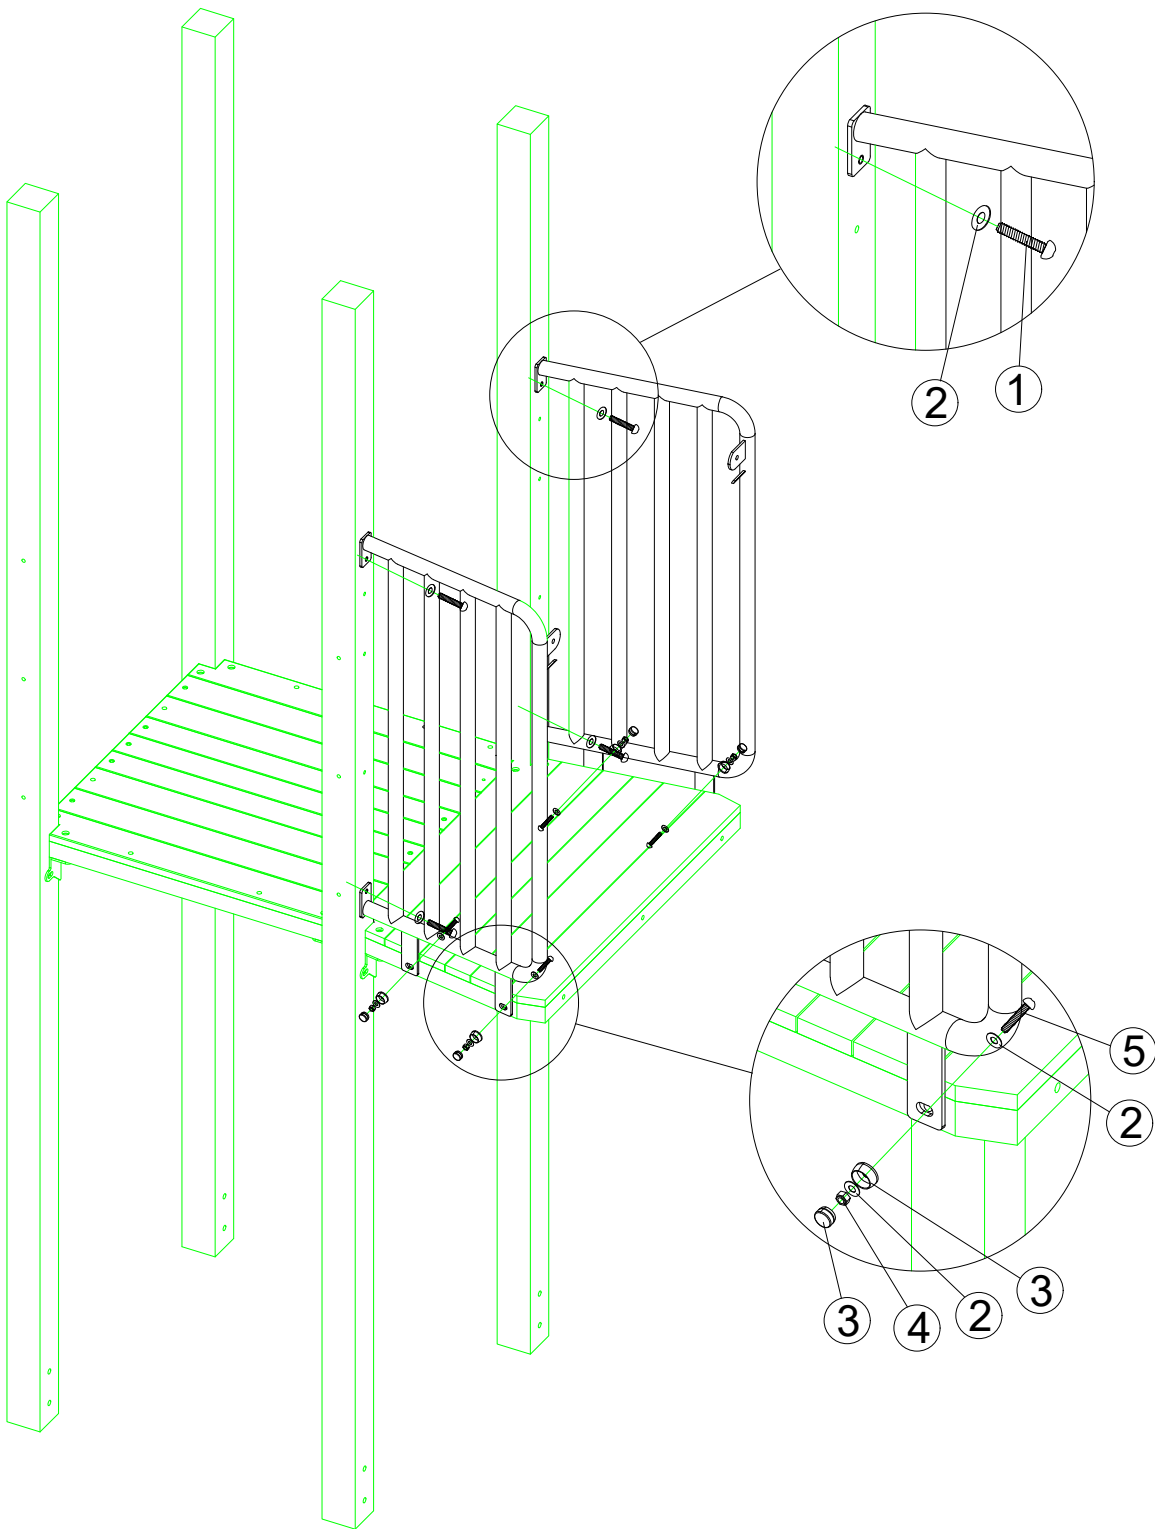


## Installation Steps:

1:As shown in the figure, align the handrail with the embedded holes of the post, and use corresponding hardware to connect and tighten them.

2:As shown in the figure, place the L shaped corner brace of the pedal bridge below the deck, align the corresponding holes, and use corresponding hardware to connect and tighten.

### 67-WK003 WiseKidz -300mm Inclined Step Board Bridge L1520mm

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*80         | 4        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 16       |
| 3      | LOCK NUT                   | M8            | 4        |
| 4      | PLASTIC CAP                | Ø34 M10       | 4        |
| 5      | TAMPER RESISTANT TORX-BOLT | M8*30         | 8        |

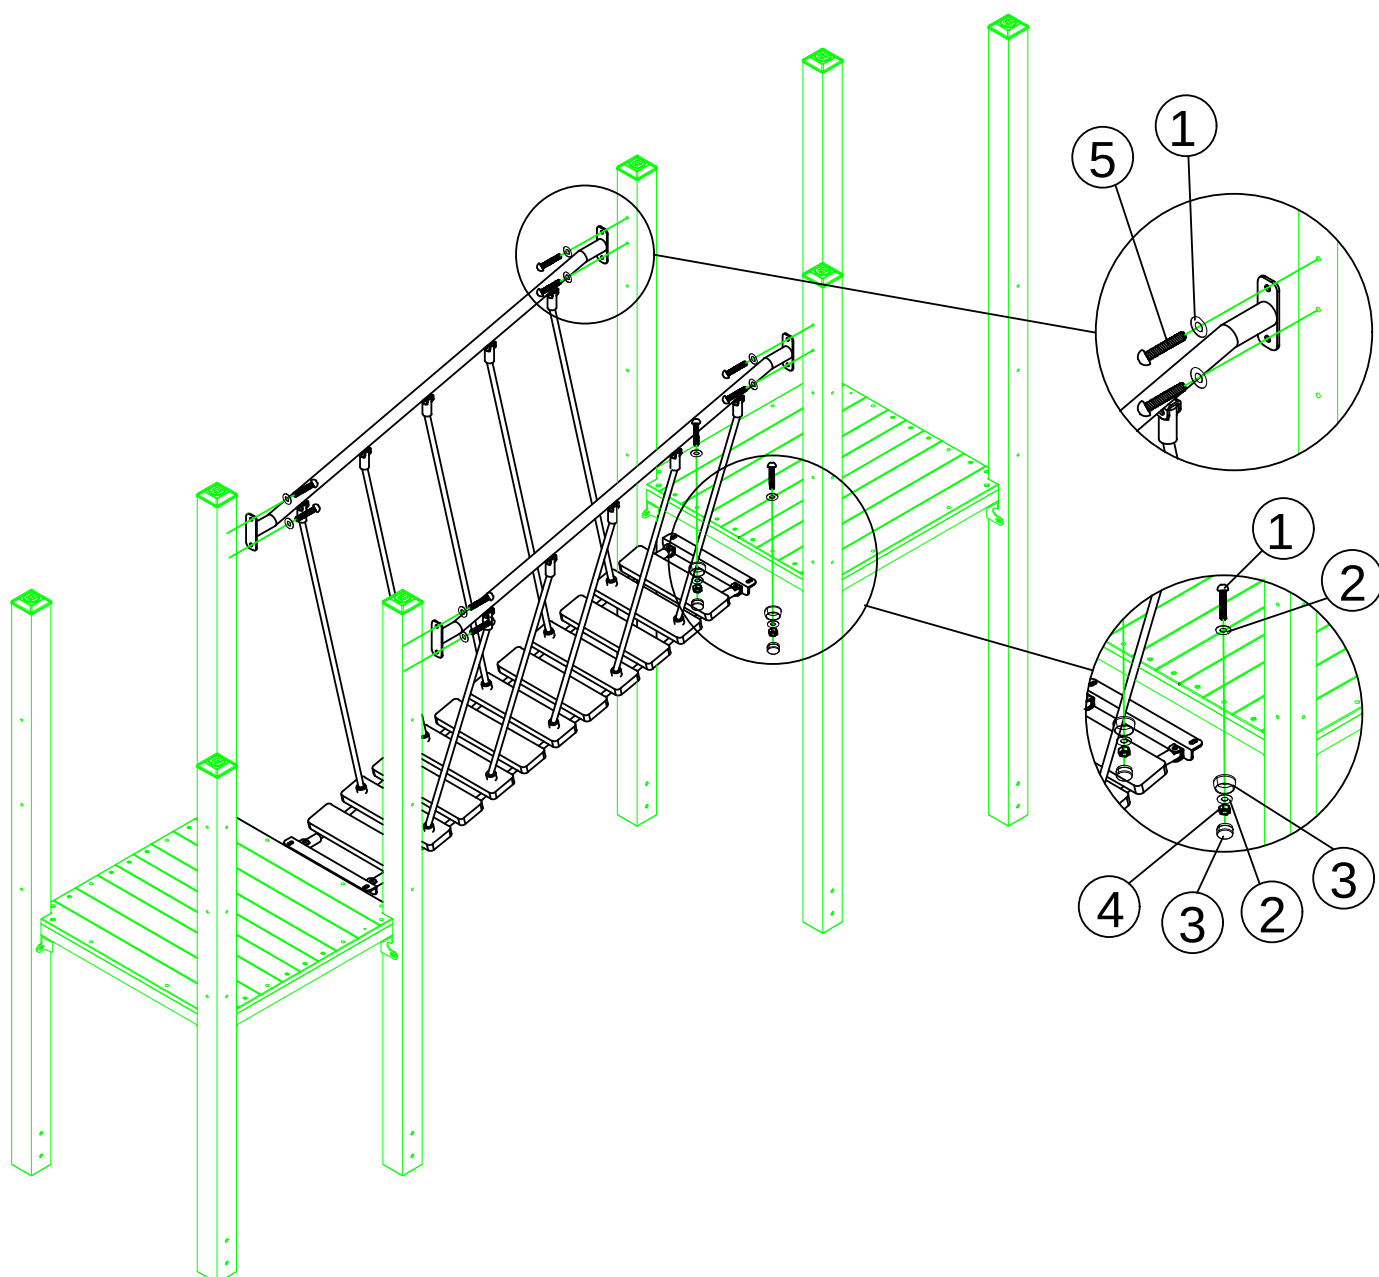


## Installation Steps:

1: Place the net climber under the deck, align the connection holes, and use corresponding hardware to connect and fasten them.

1: Align the handrail with the center of the post, and use corresponding hardware to connect and fasten it.

### 67-WK007 WiseKidz - 300mm Inclined Net Bridge L1520mm

| Number | Name                                    | Model         | Quantity |
|--------|-----------------------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT              | M8*70         | 4        |
| 2      | FLAT WASHER                             | 8.5/23.5*T1.5 | 4        |
| 3      | LOCK NUT                                | M8            | 4        |
| 4      | PLASTIC CAP                             | φ34 M10       | 4        |
| 5      | Stainless Steel Hex Self-drilling Screw | M8*50         | 8        |

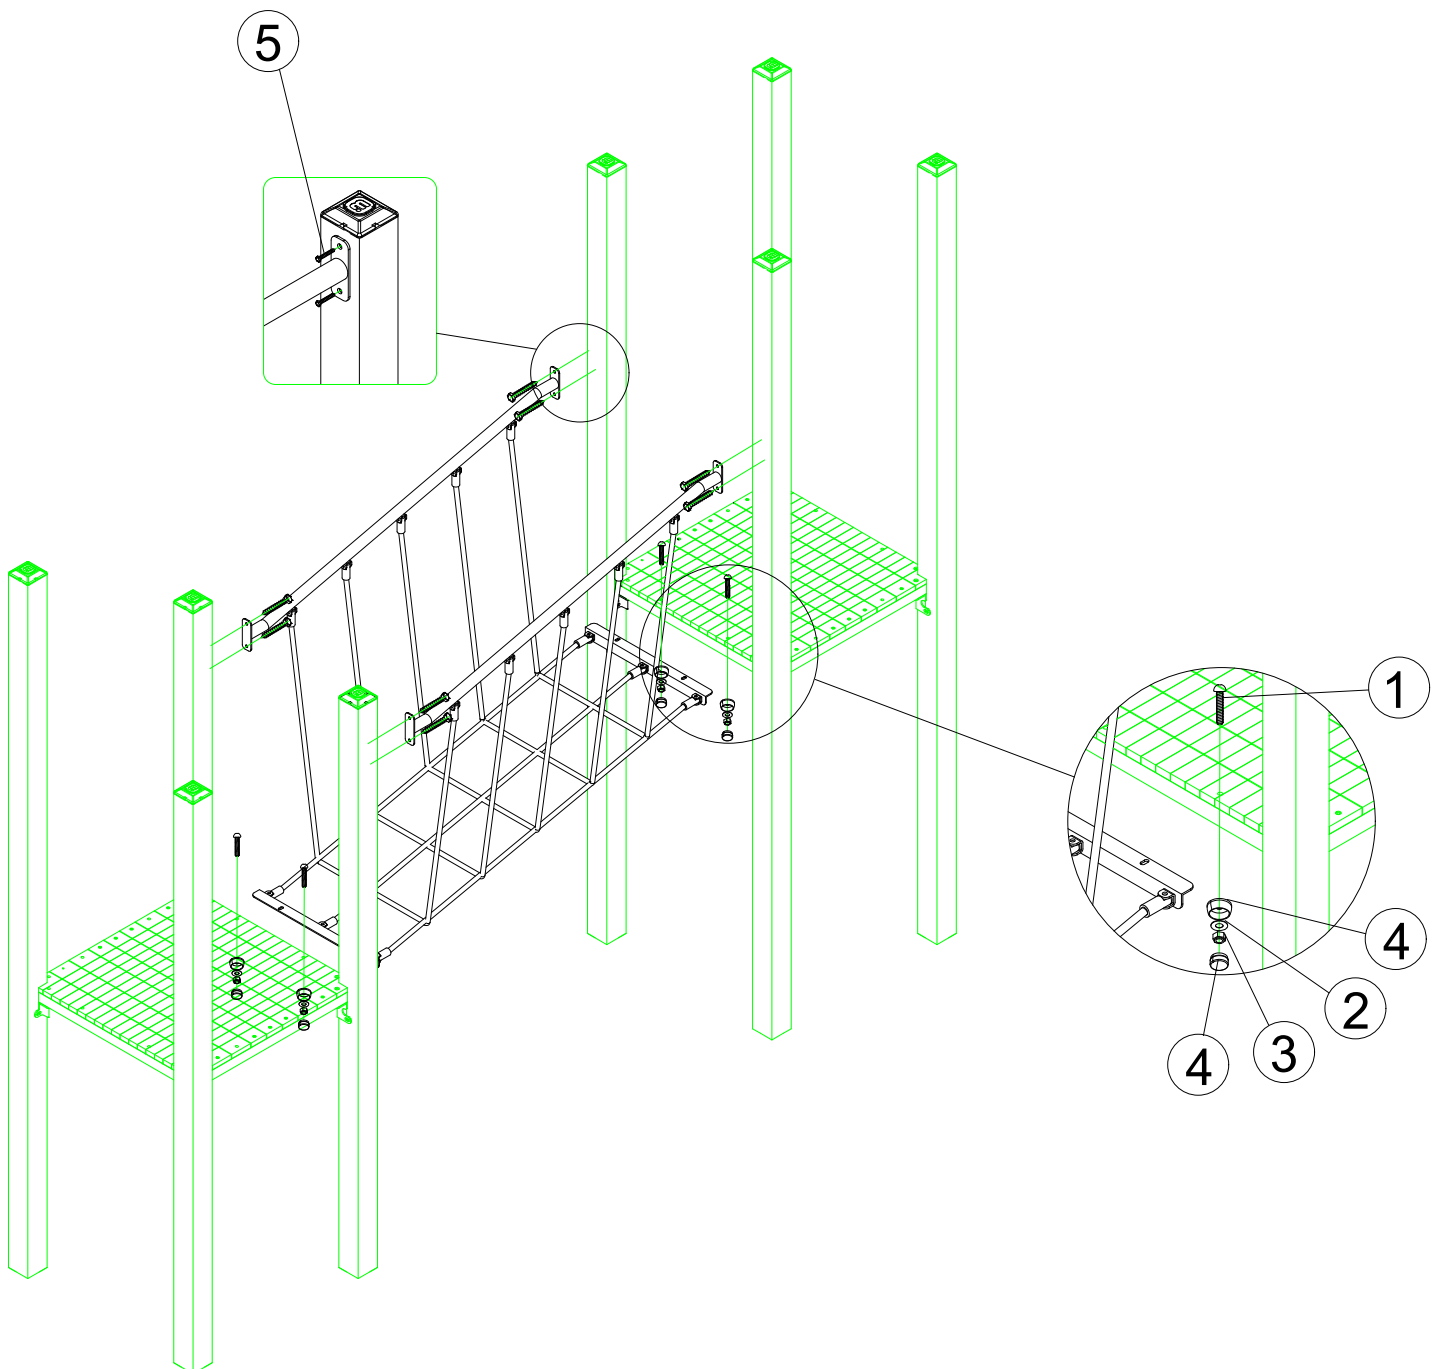


## Installation Steps:

1: Align the connection holes of the stairs and the platform with an angle bracket, then connect and tighten them with the corresponding hardware.  
2: Place the stair post into the pre-embedded support, align it with the connection holes of the stairs, then connect and tighten them with the corresponding hardware.

### 68-WK001 WiseKidz - 120cm PE Stairs w/Handrails 1-2

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*25         | 2        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 16       |
| 3      | LOCK NUT                   | M8            | 8        |
| 4      | PLASTIC CAP                | Ø34 M10       | 8        |
| 5      | TAMPER RESISTANT TORX-BOLT | M8*80         | 2        |
| 6      | TAMPER RESISTANT TORX-BOLT | M8*100        | 4        |

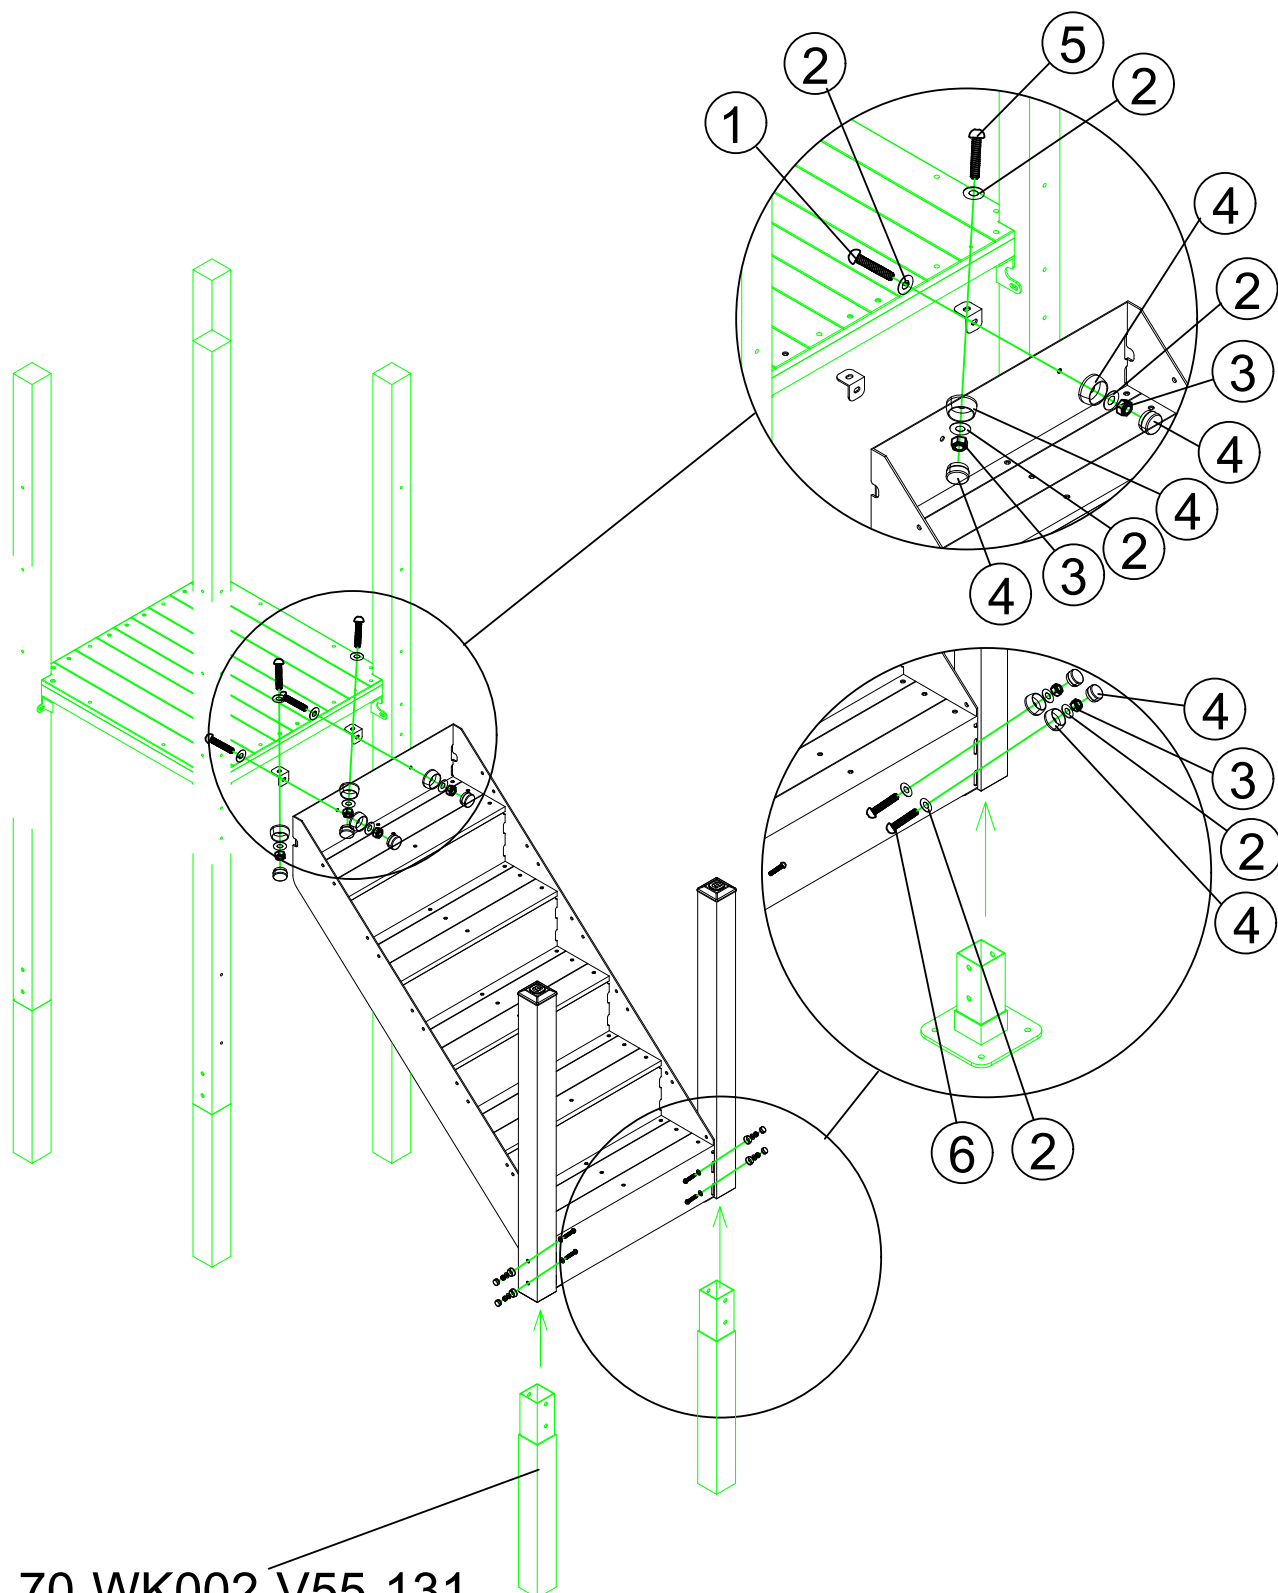

70-WK002-V55-131

## 68-WK001 WiseKidz - 120cm PE Stairs w/Handrails 2-2


| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*30         | 44       |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 84       |
| 3      | LOCK NUT                   | M8            | 40       |
| 4      | PLASTIC CAP                | Ø34 M10       | 40       |

### Installation Steps:

1:As shown in the diagram, align the stair handrail with the pre-embedded holes of the metal post, fit the screws in (but do not tighten them).

2:Align the baffle with the connection holes of the stairs and the handrail, then connect and tighten them with the corresponding hardware.

3:Tighten all screws.

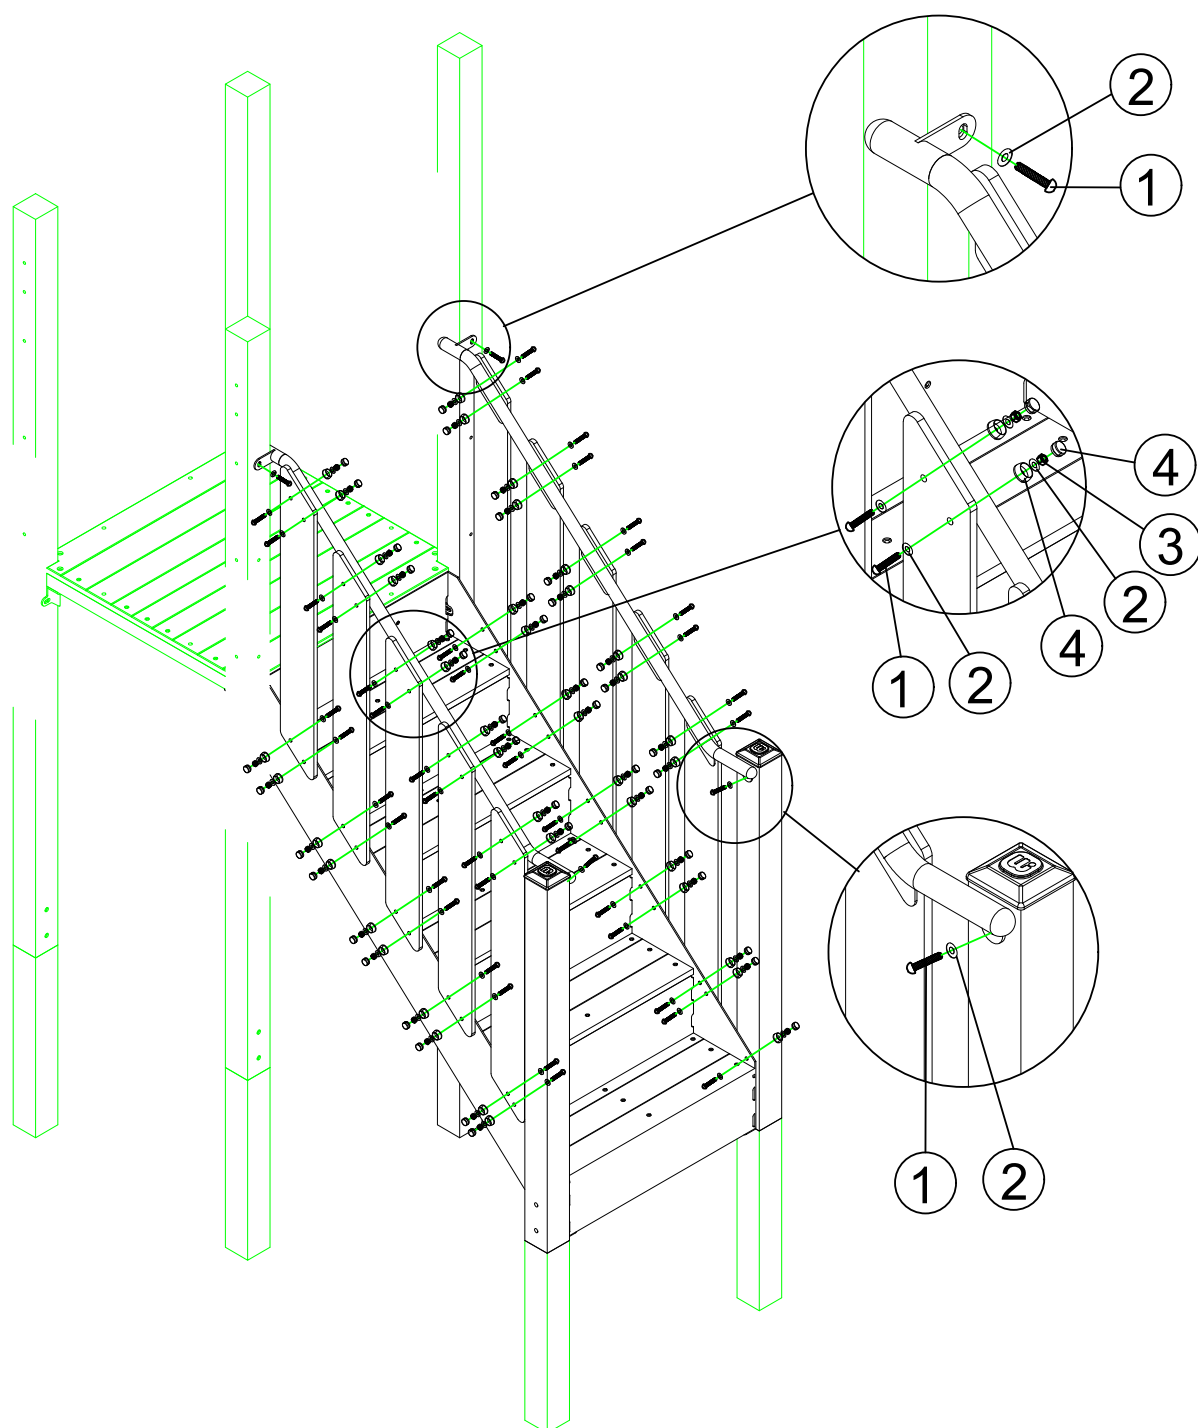


## Installation Steps:

- 1: Align footer with climber holes and secure with corresponding hardware.
- 2: Place Arch Net Climber below the deck, align the connection holes, and secure with corresponding hardware.

### 63-WK001 WiseKidz - 90cm Stainless Arch Net Climber

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*75         | 2        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 2        |
| 3      | LOCK NUT                   | M8            | 2        |
| 4      | PLASTIC CAP                | Ø10*34        | 4        |
| 5      | TAMPER RESISTANT TORX-BOLT | M8*50         | 2        |
| 6      | SPRING WASHER              | M8*2.5        | 4        |

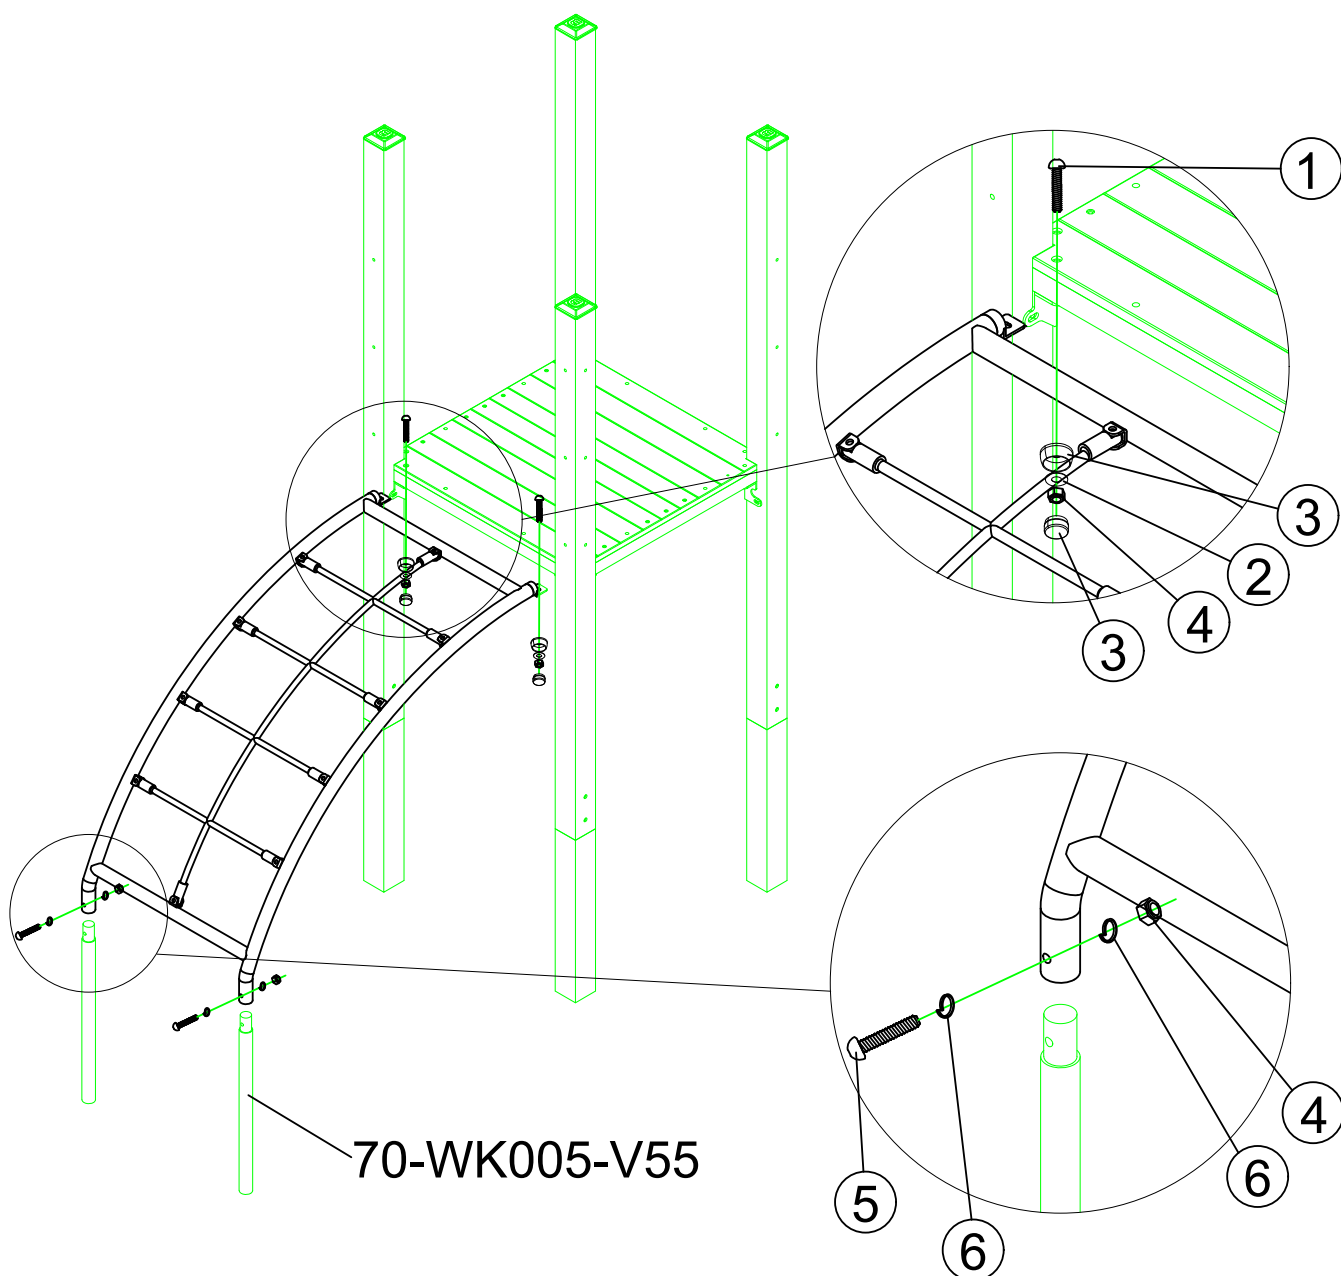


## Installation Steps:

1: Align footer holes with inclined PE climber holes and secure with corresponding hardware.

2: Place inclined PE climber below deck, align holes, and secure with corresponding hardware.

### 63-WK006 WiseKidz - 150cm PE Rock Climber

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*75         | 2        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 2        |
| 3      | LOCK NUT                   | M8            | 2        |
| 4      | PLASTIC CAP                | Ø10*34        | 4        |
| 5      | TAMPER RESISTANT TORX-BOLT | M8*50         | 2        |
| 6      | SPRING WASHER              | M8*2.5        | 4        |

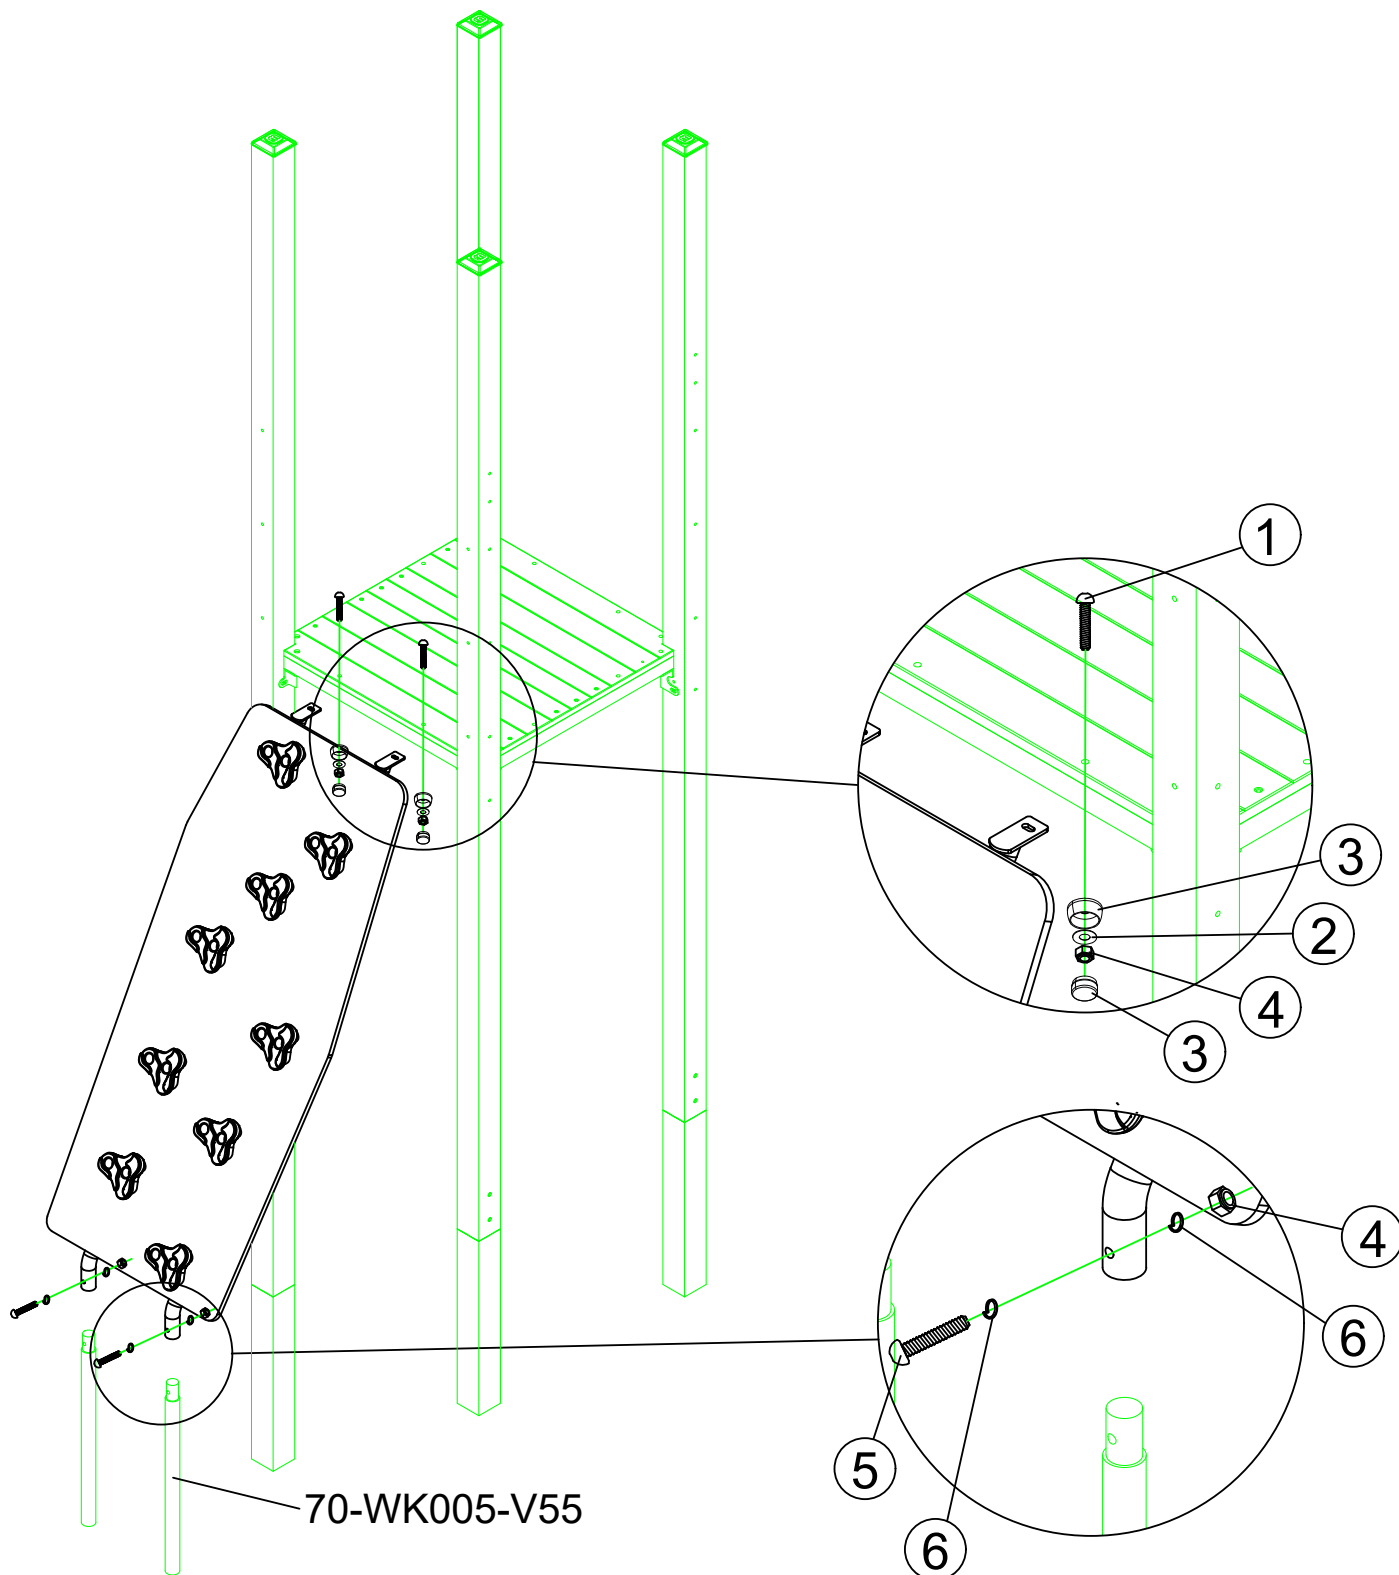




## Installation Steps:

1:As shown in the figure, insert the inground footer into the fireman's pole sleeve, then secure with corresponding hardware.

### 63-WK014 WiseKidz - 120cm Stainless Fireman's Pole 1-2

| Number | Name                       | Model  | Quantity |
|--------|----------------------------|--------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*50  | 2        |
| 2      | SPRING WASHER              | M8*2.5 | 4        |
| 3      | LOCK NUT                   | M8     | 2        |

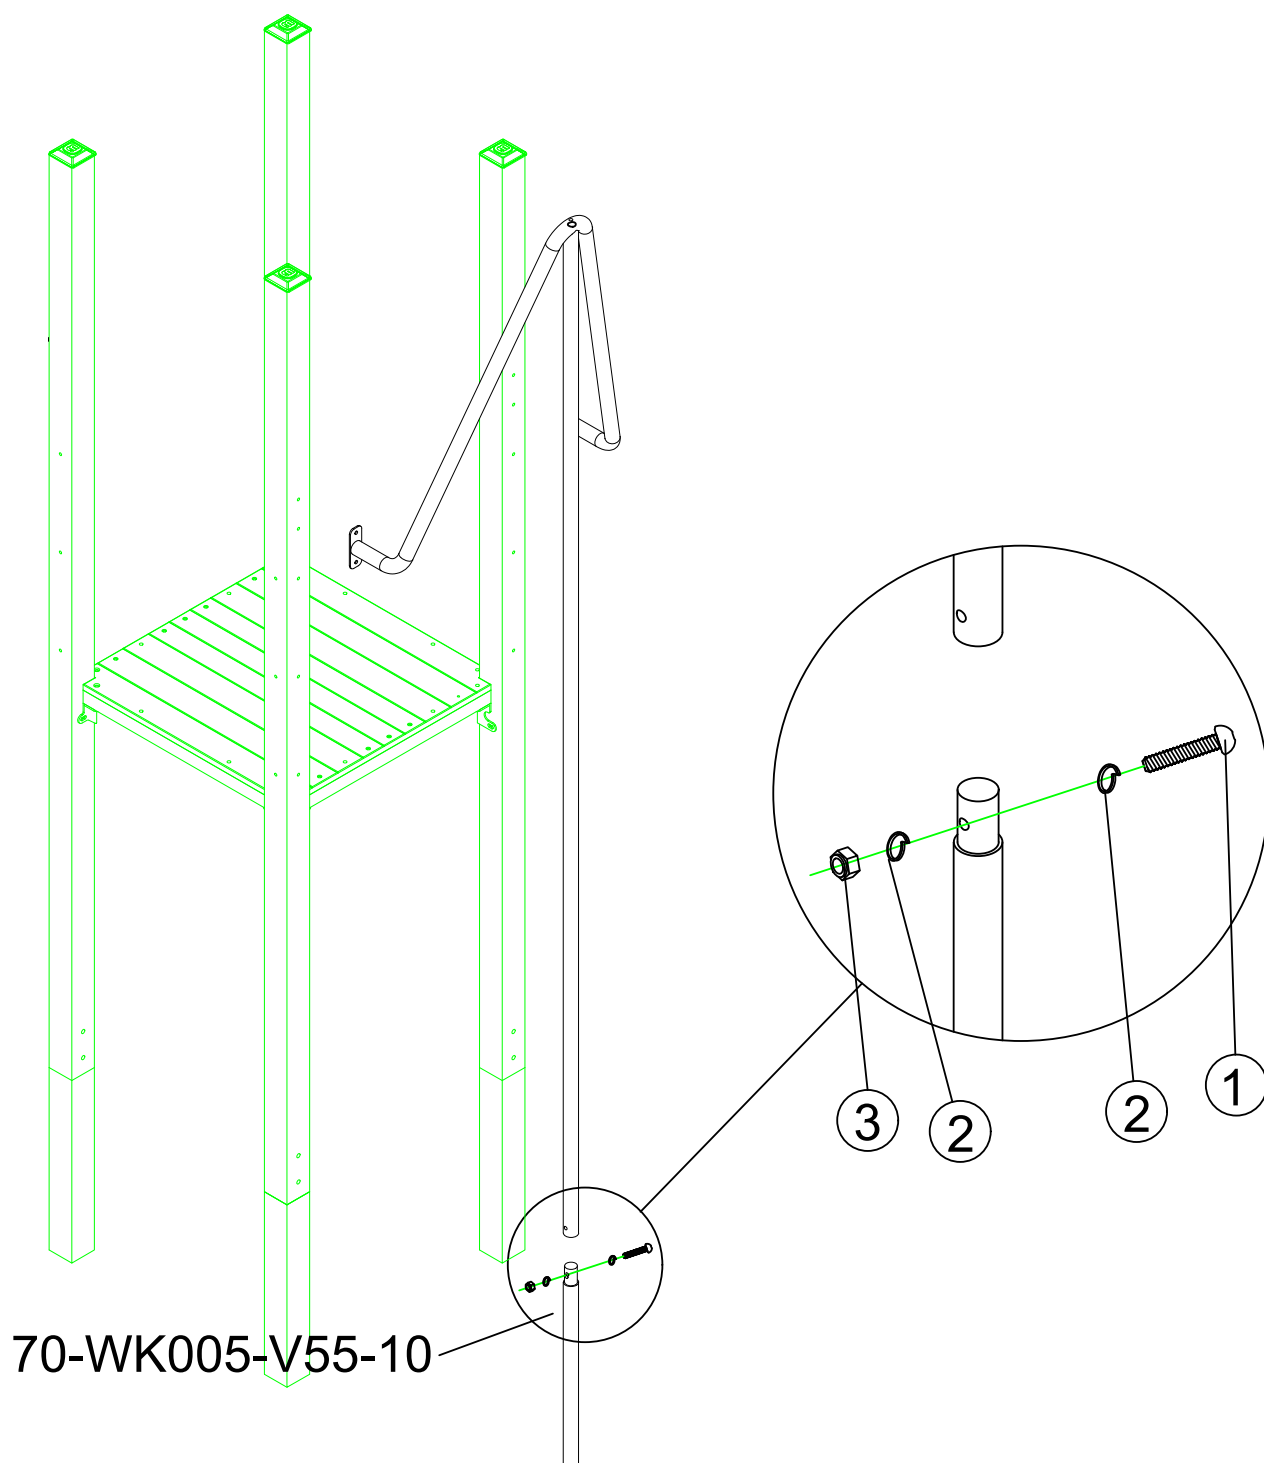


## Installation Steps:

1:As shown in the figure, insert the inground footer into the fireman's pole sleeve, then secure with corresponding hardware.

### 63-WK014 WiseKidz - 120cm Stainless Fireman's Pole 2-2

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*25         | 4        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 5        |
| 3      | TAMPER RESISTANT TORX-BOLT | M8*55         | 4        |


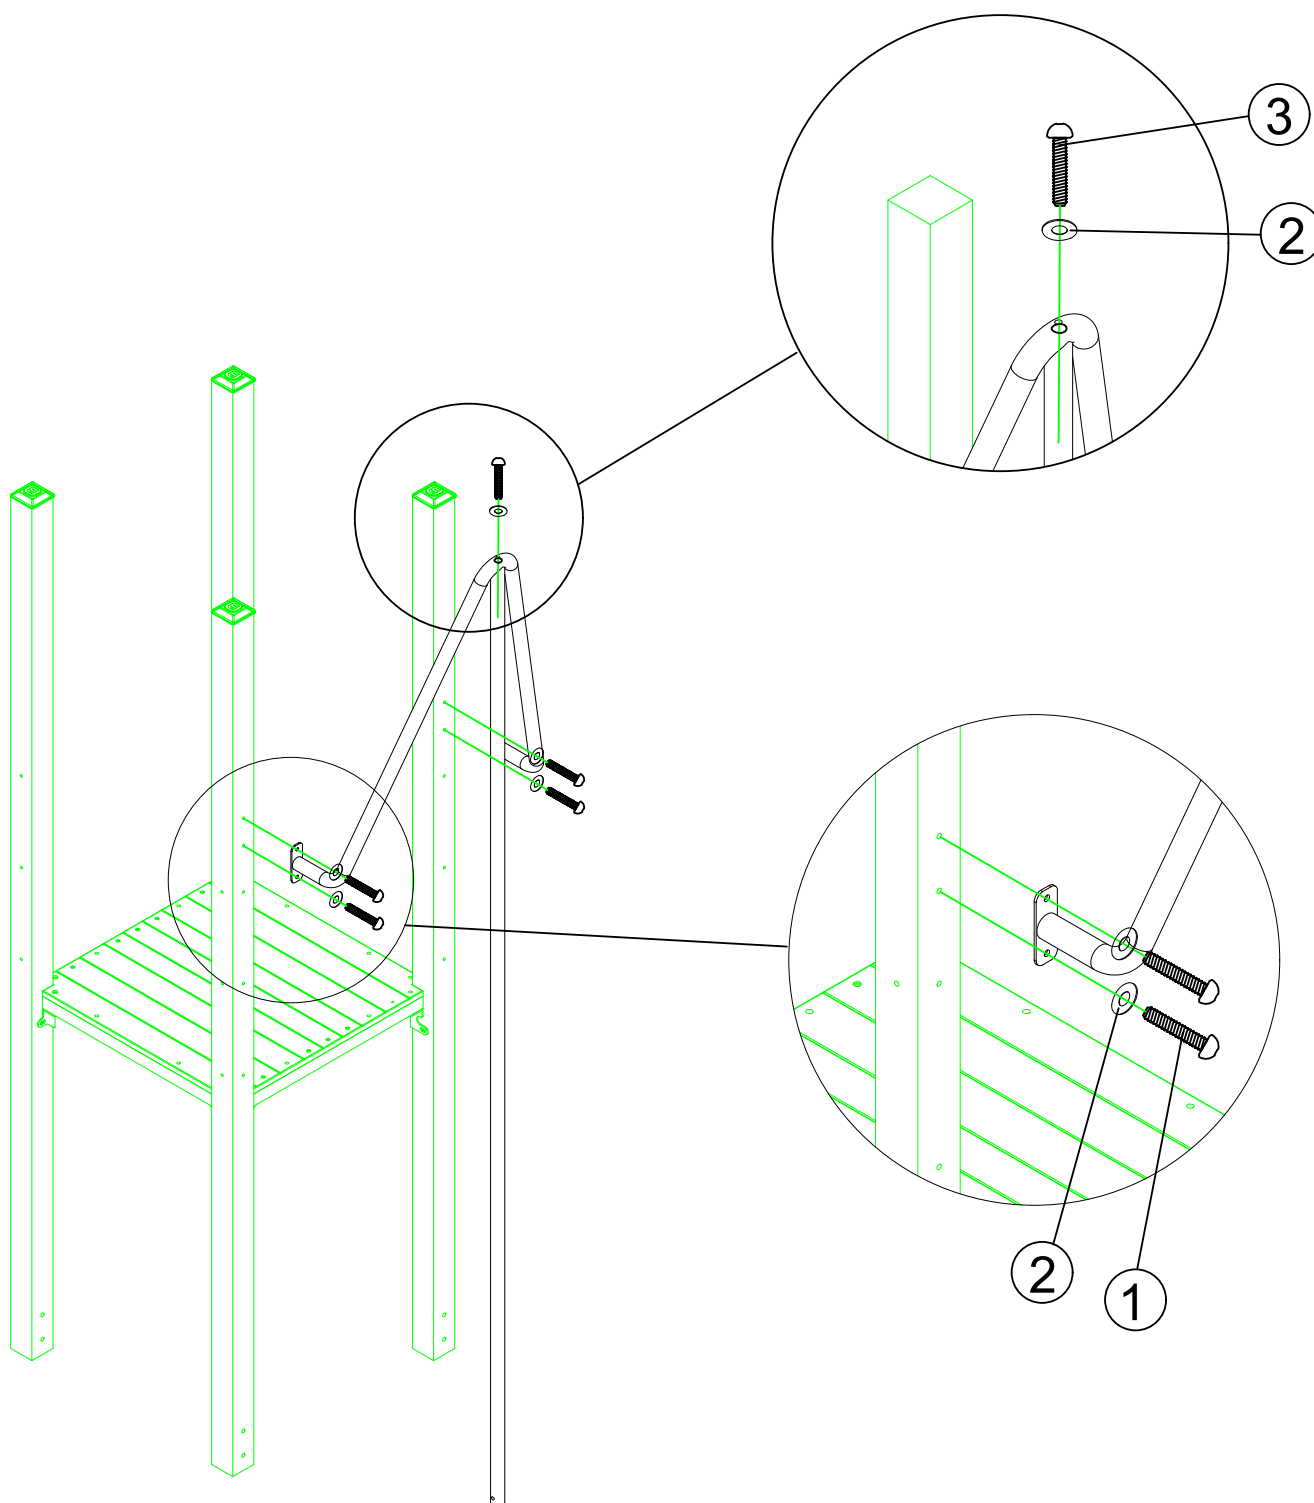


## Installation Steps:

1: As shown in the figure, align the panel with the embedded holes of the post, and use corresponding hardware to connect and fasten them.

### 66-WK002 WiseKidz - PE Climber Entry

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*35         | 6        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 6        |

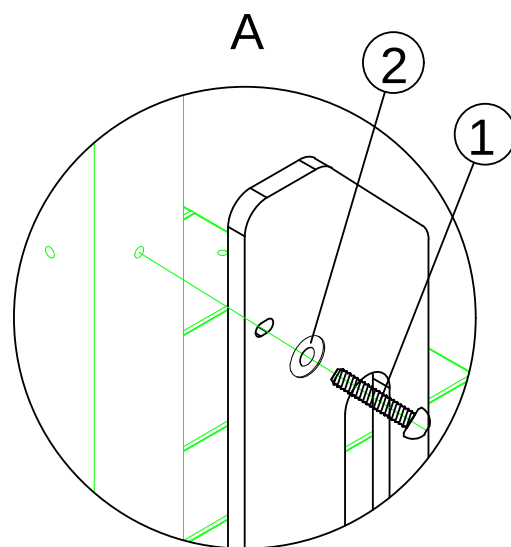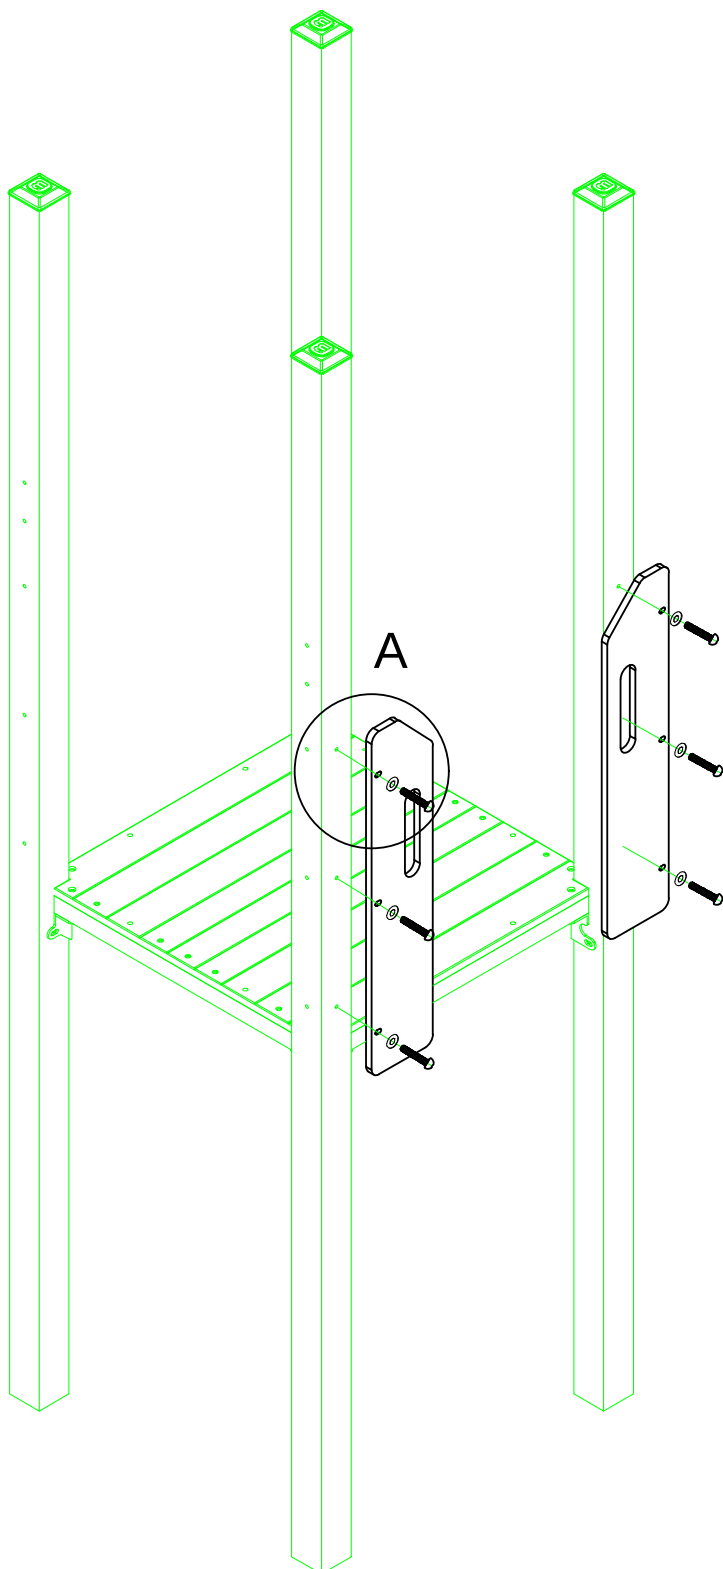


## Installation Steps:

1: Align the connection holes of the panel with those of the post, then connect and tighten them with the corresponding hardware.

### 66-WK031 WiseKidz - PE Safety Panel 1220mm

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*35         | 6        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 6        |


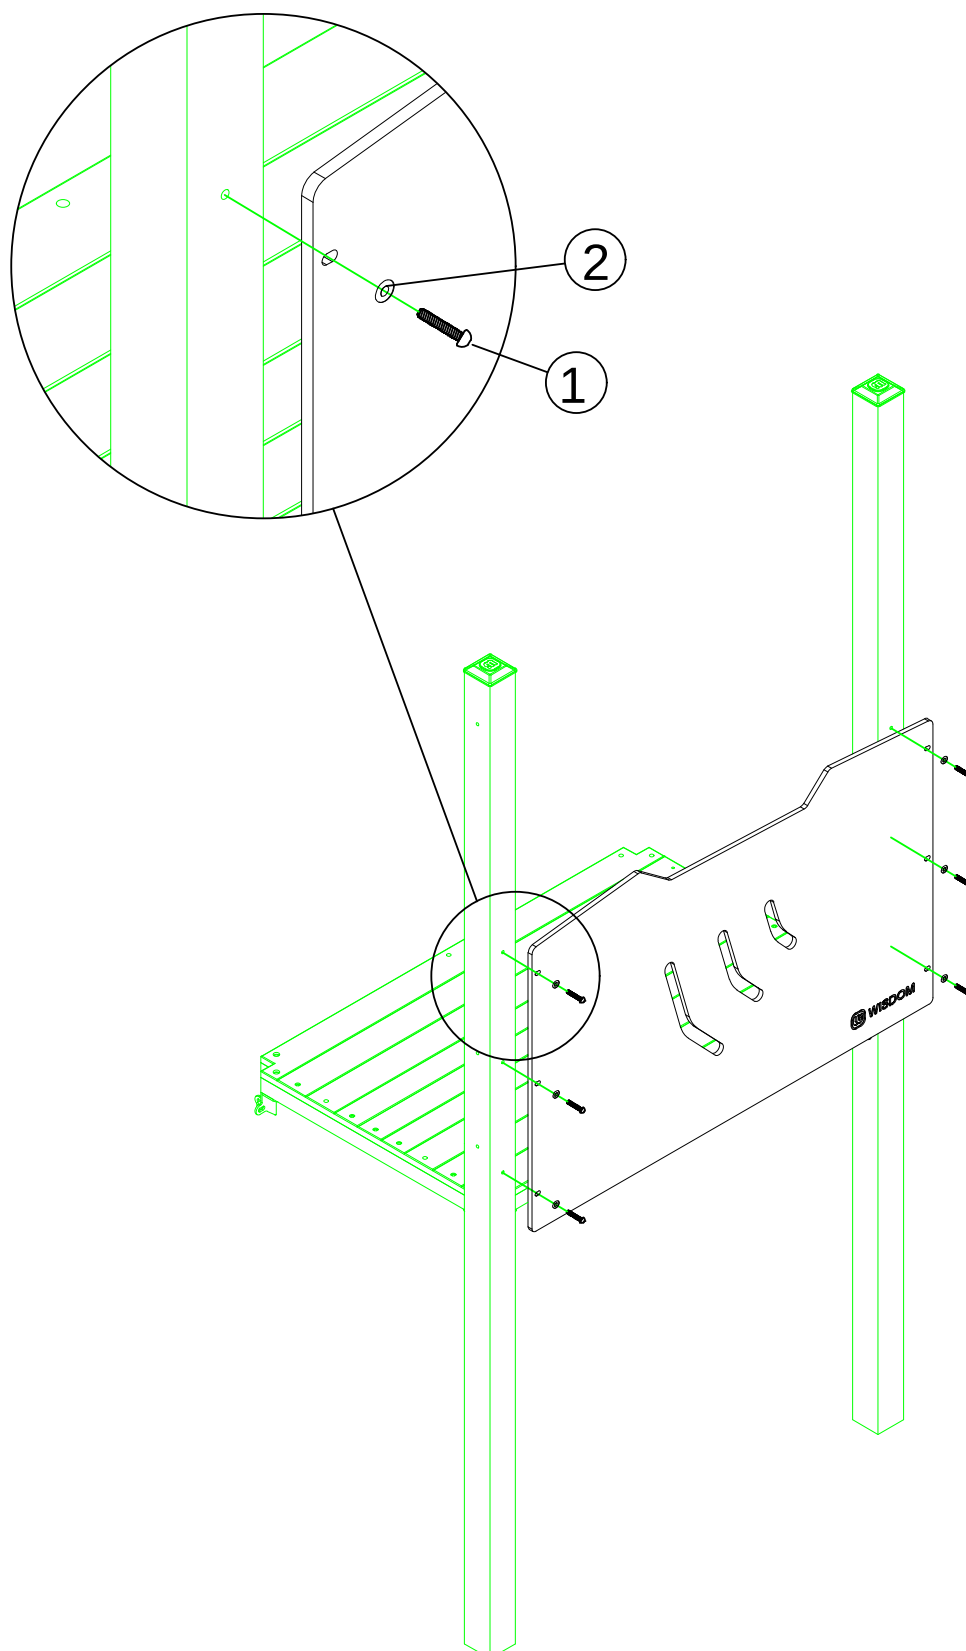


## Installation Steps:

1: Align the connection holes of the panel with those of the post, then connect and tighten them with the corresponding hardware.

### 66-WK012 WiseKidz - PE Counter Panel Roof

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*35         | 4        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 4        |

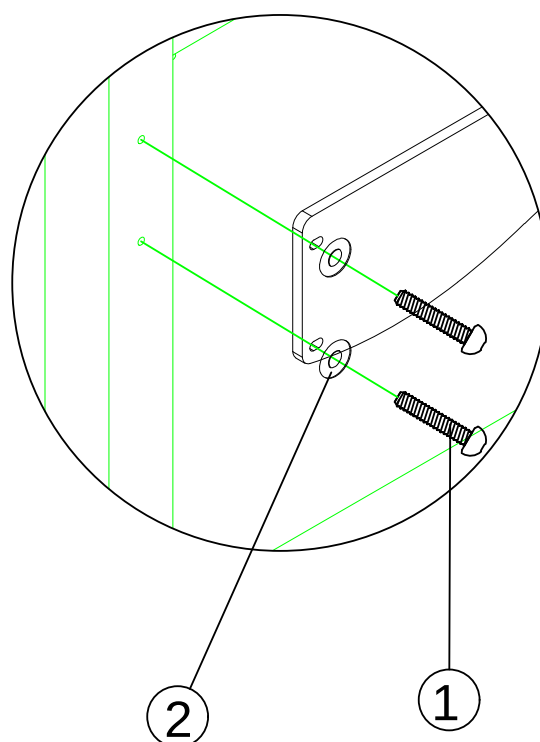
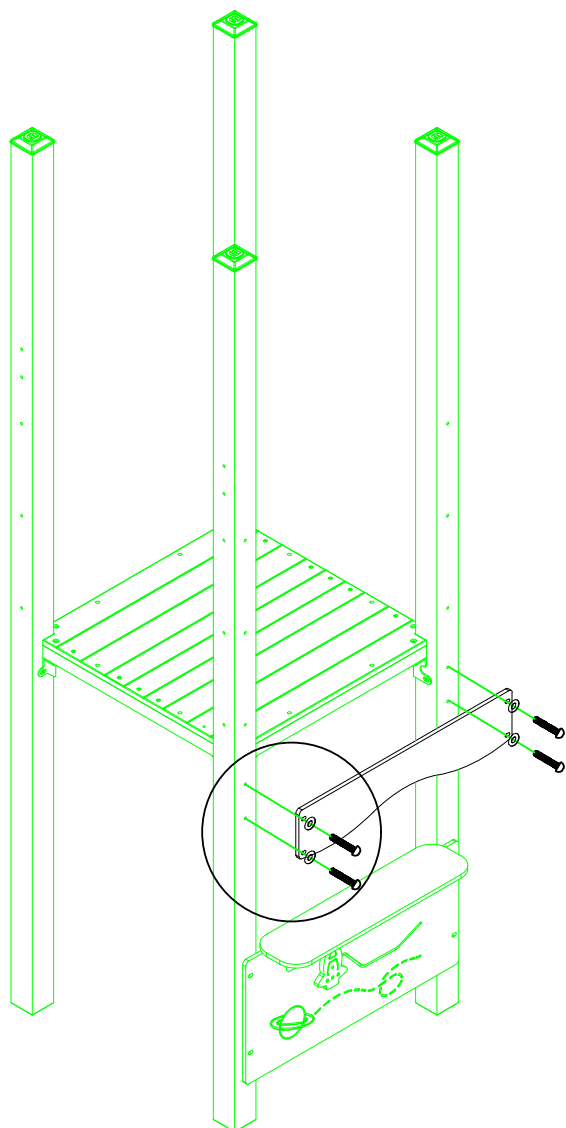


## Installation Steps:

1:Align the connection holes of the panel with those of the post, then connect and tighten them with the corresponding hardware.

### 66-WK013 WiseKidz - PE Counter Panel

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*35         | 4        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 4        |

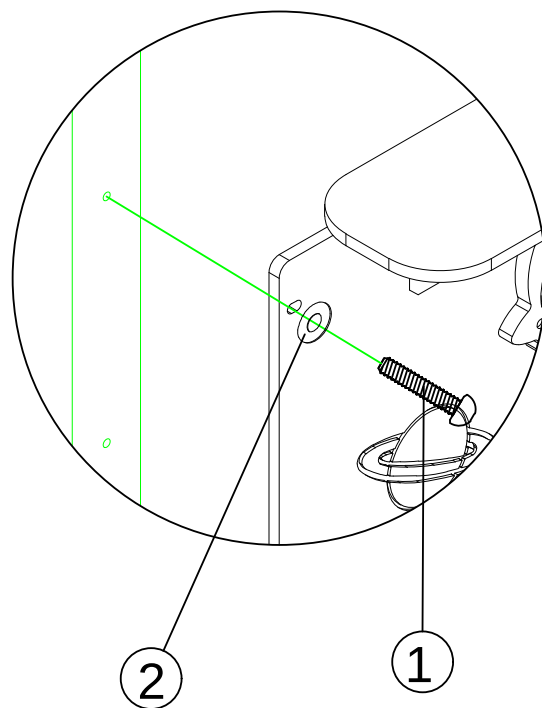
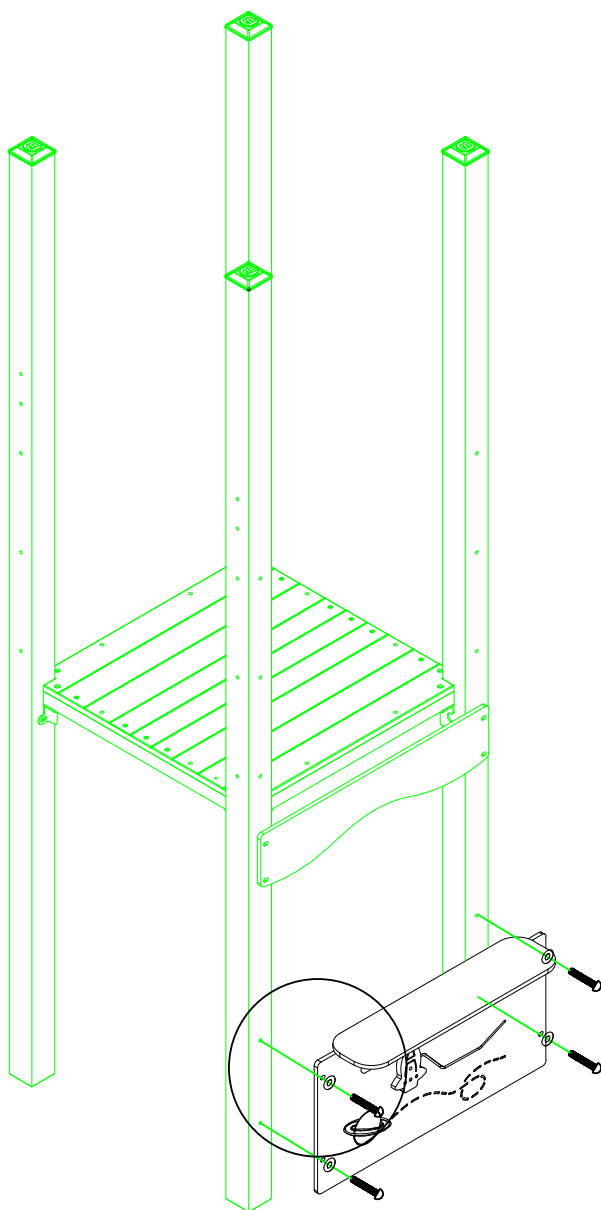


## Installation Steps:

1: Align the connection holes of the panel with those of the post, then connect and tighten them with the corresponding hardware.

### 66-WK010 WiseKidz - PE Flip-over Game Panel

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*35         | 6        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 6        |

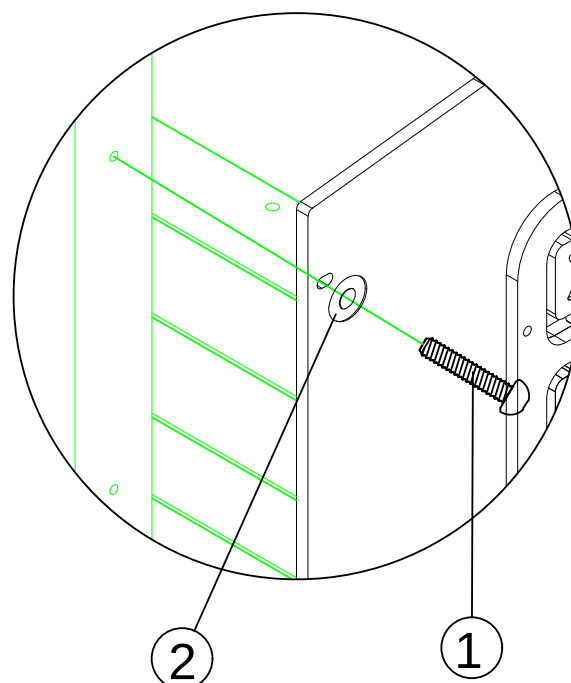
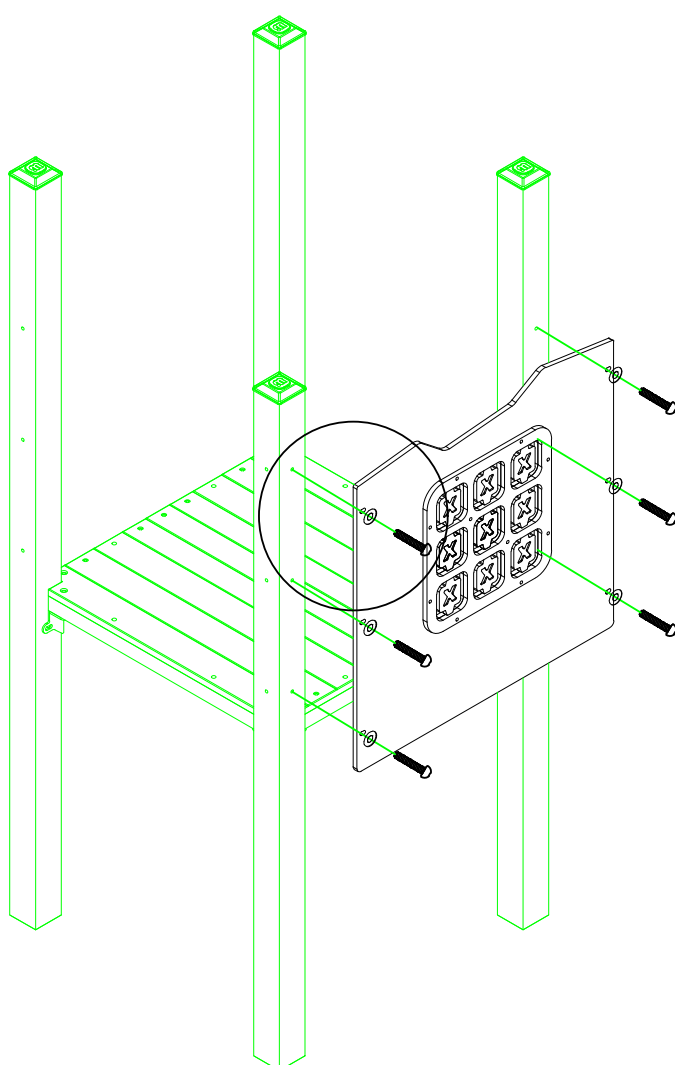


## Installation Steps:

1: As shown in the figure, align the 1 M8\*35 connection holes of the PE knob wall panel and the post, then connect and tighten them with the corresponding hardware.

### 66-WK006 WiseKidz - PE Clock & Direction Panel

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*35         | 6        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 6        |

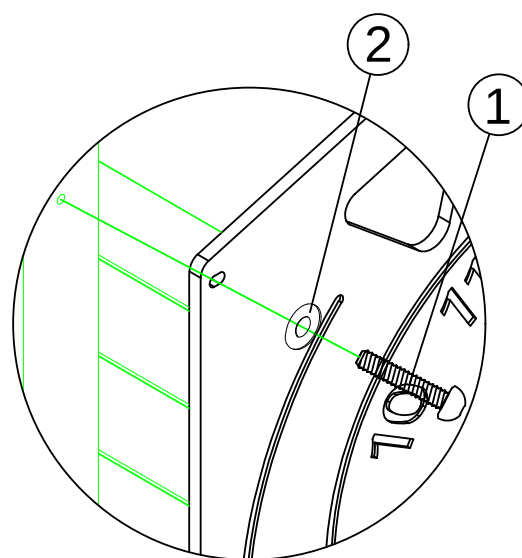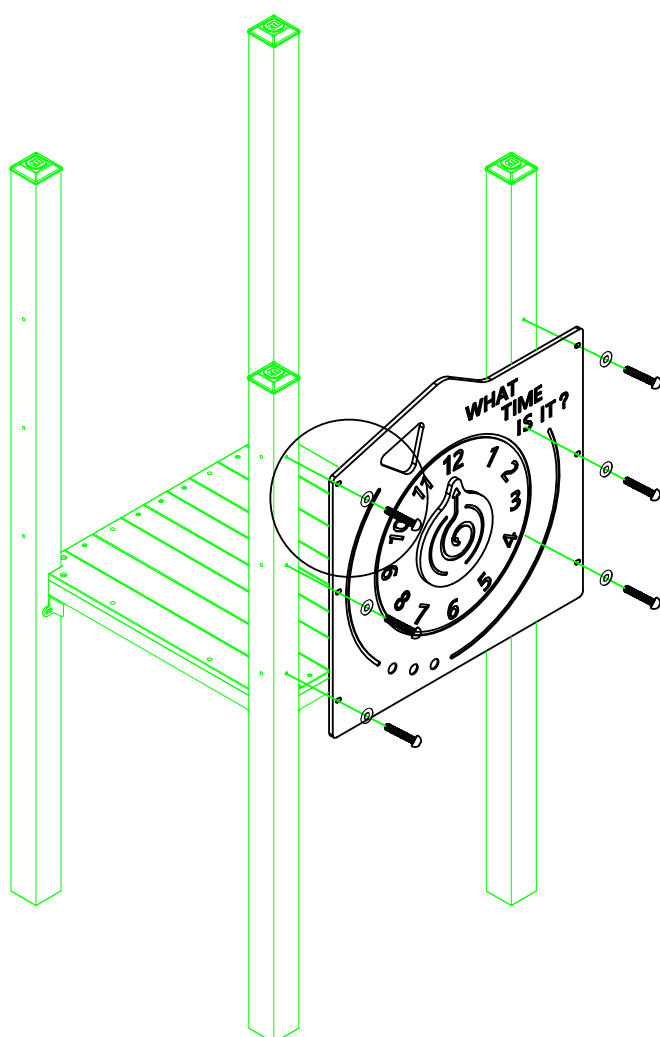





## Installation Steps:

1: As shown in the figure, align the holes of the two side panels with those of the top panel, connect and fasten them with corresponding hardware.

### 66-WK001 WiseKidz - PE Single Slide Hood 1-4

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*50         | 4        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 8        |
| 3      | PLASTIC CAP                | φ34 M10       | 4        |
| 4      | LOCK NUT                   | M8            | 4        |

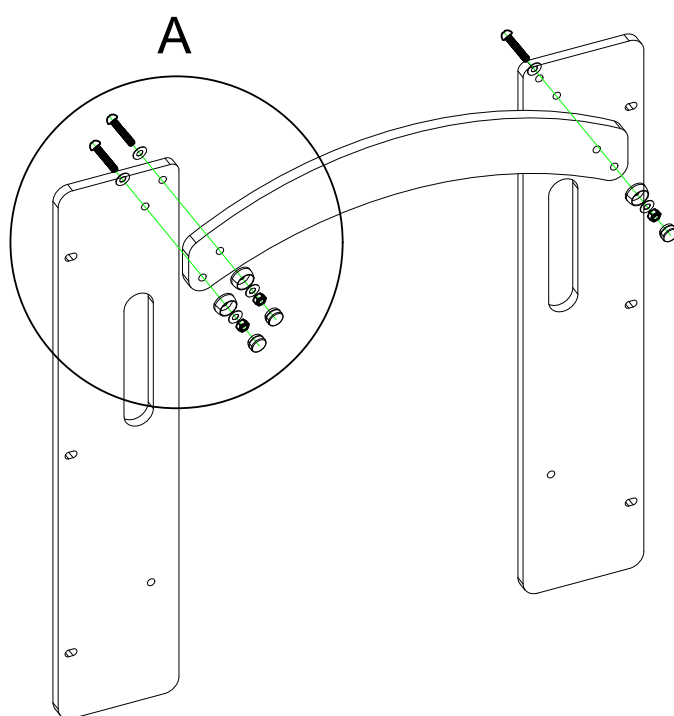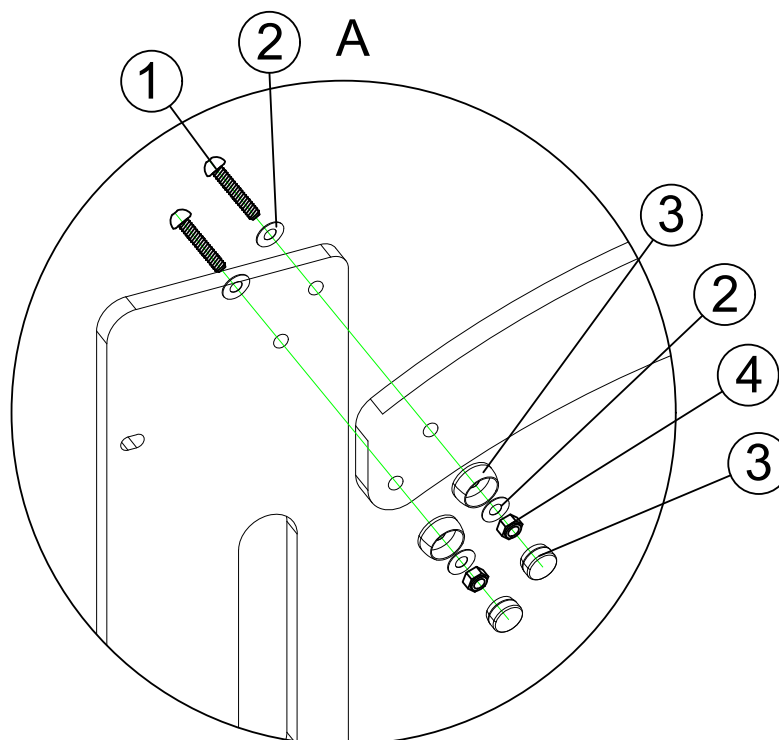


## Installation Steps:

1: As shown in the figure, align the stainless steel connector with the connection holes of the deck, use corresponding hardware to connect and fasten them.

### 66-WK001 WiseKidz - PE Single Slide Hood 2-4

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*75         | 2        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 4        |
| 3      | PLASTIC CAP                | φ34 M10       | 2        |
| 4      | LOCK NUT                   | M8            | 2        |

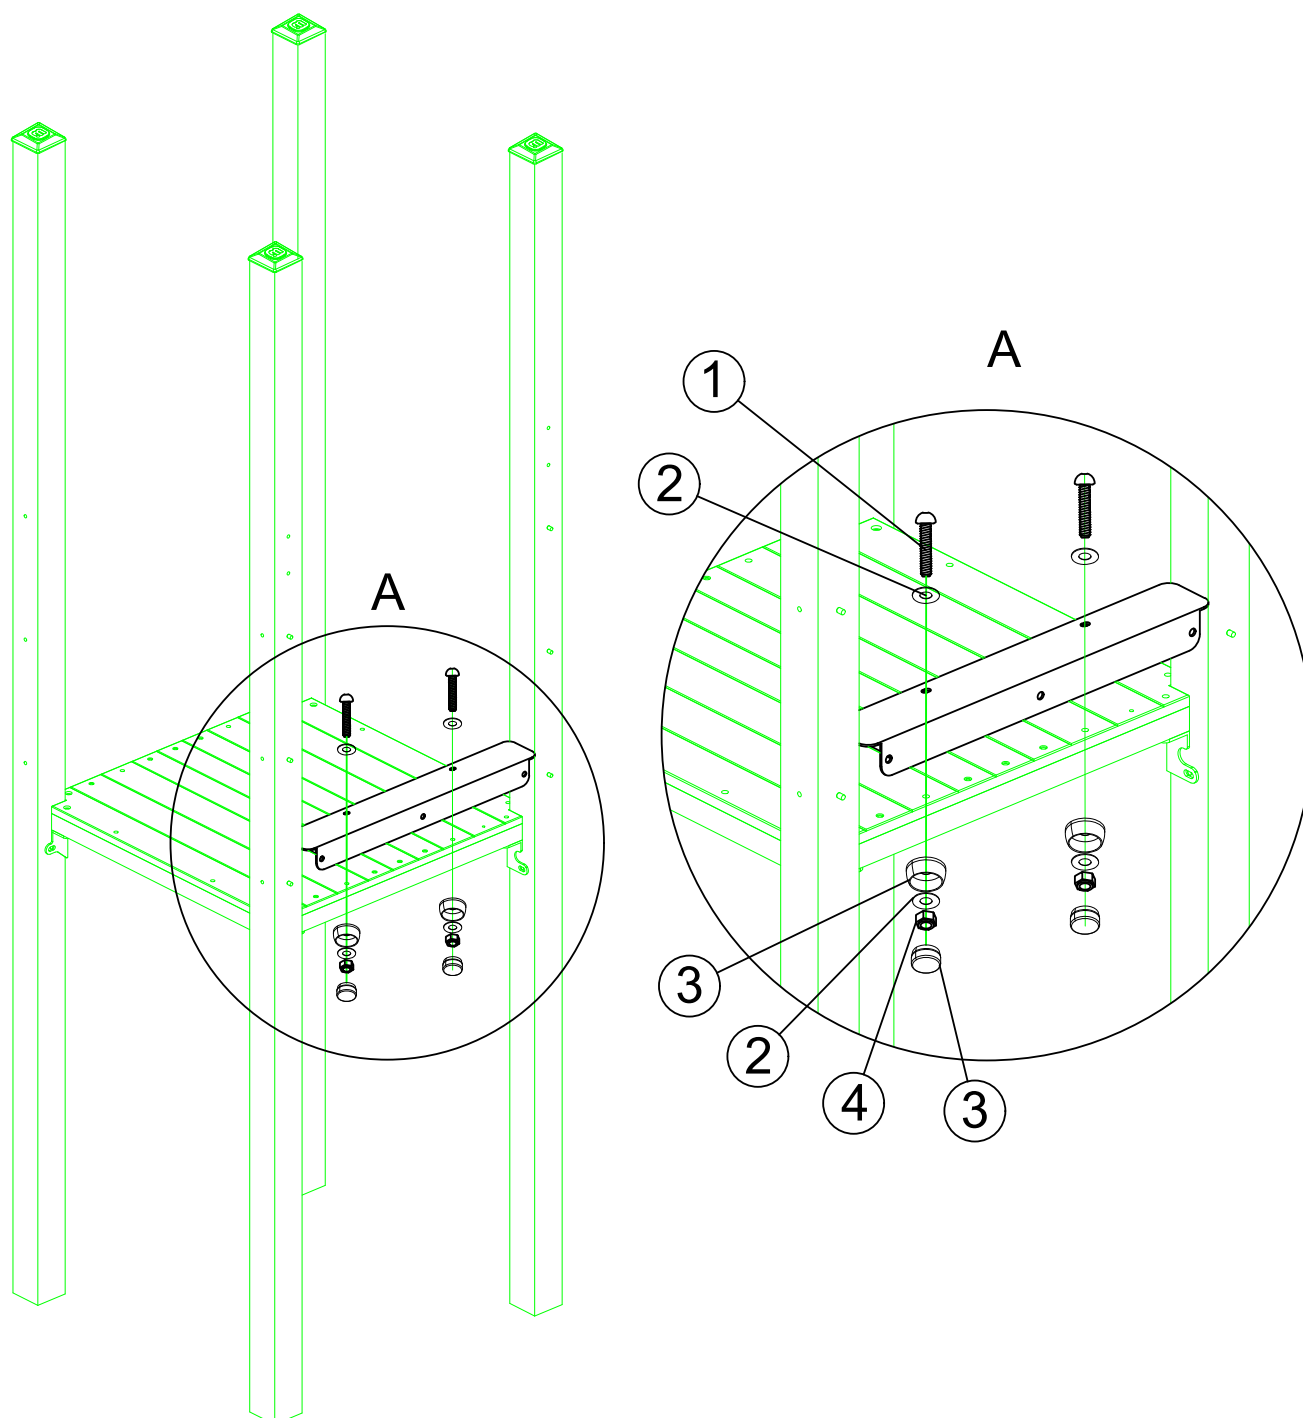


## Installation Steps:

1: As shown in the figure, align the panel with the embedded holes of the post, and use corresponding hardware to connect and fasten them.

### 66-WK001 WiseKidz - PE Single Slide Hood 3-4

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*35         | 6        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 6        |

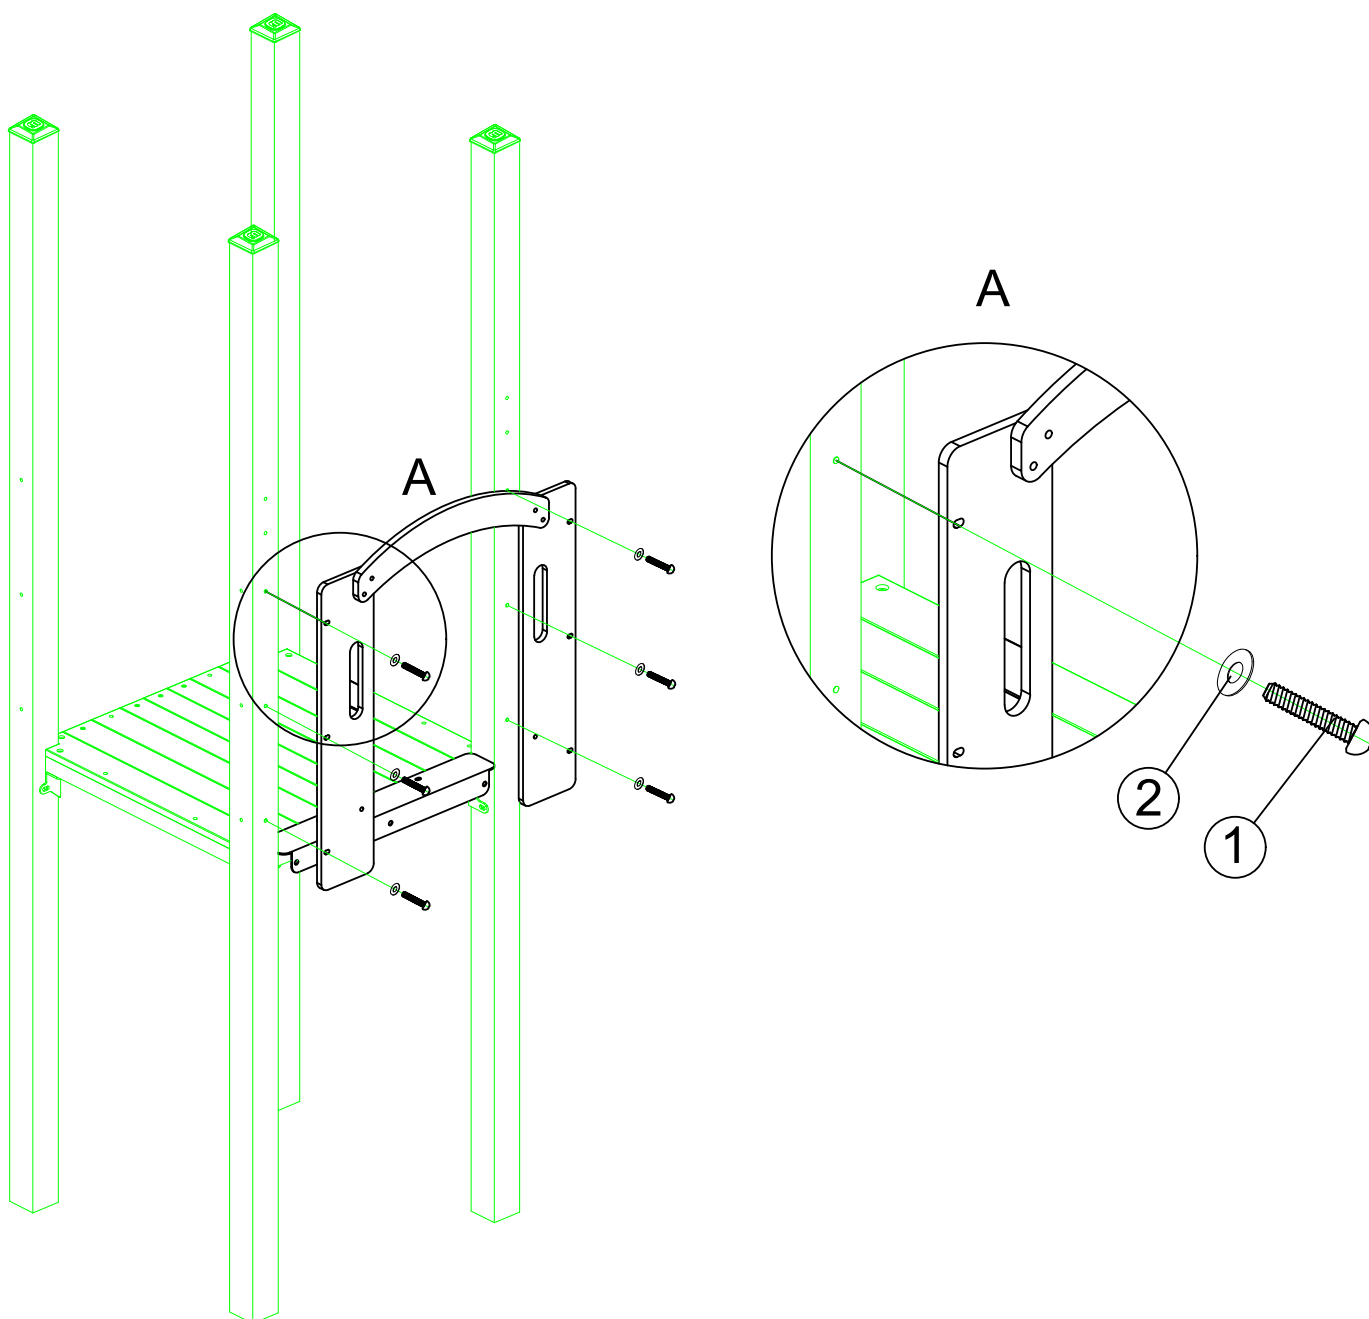


## Installation Steps:

1: As shown in the figure, when installing the slide, align the connection holes of the slide with those of the panel, and use corresponding hardware to connect and fasten them.


### 66-WK001 WiseKidz - PE Single Slide Hood 4-4

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*45         | 2        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 9        |
| 3      | PLASTIC CAP                | φ34 M10       | 4        |
| 4      | LOCK NUT                   | M8            | 4        |
| 5      | TAMPER RESISTANT TORX-BOLT | M8*35         | 2        |
| 6      | TAMPER RESISTANT TORX-BOLT | M8*25         | 1        |

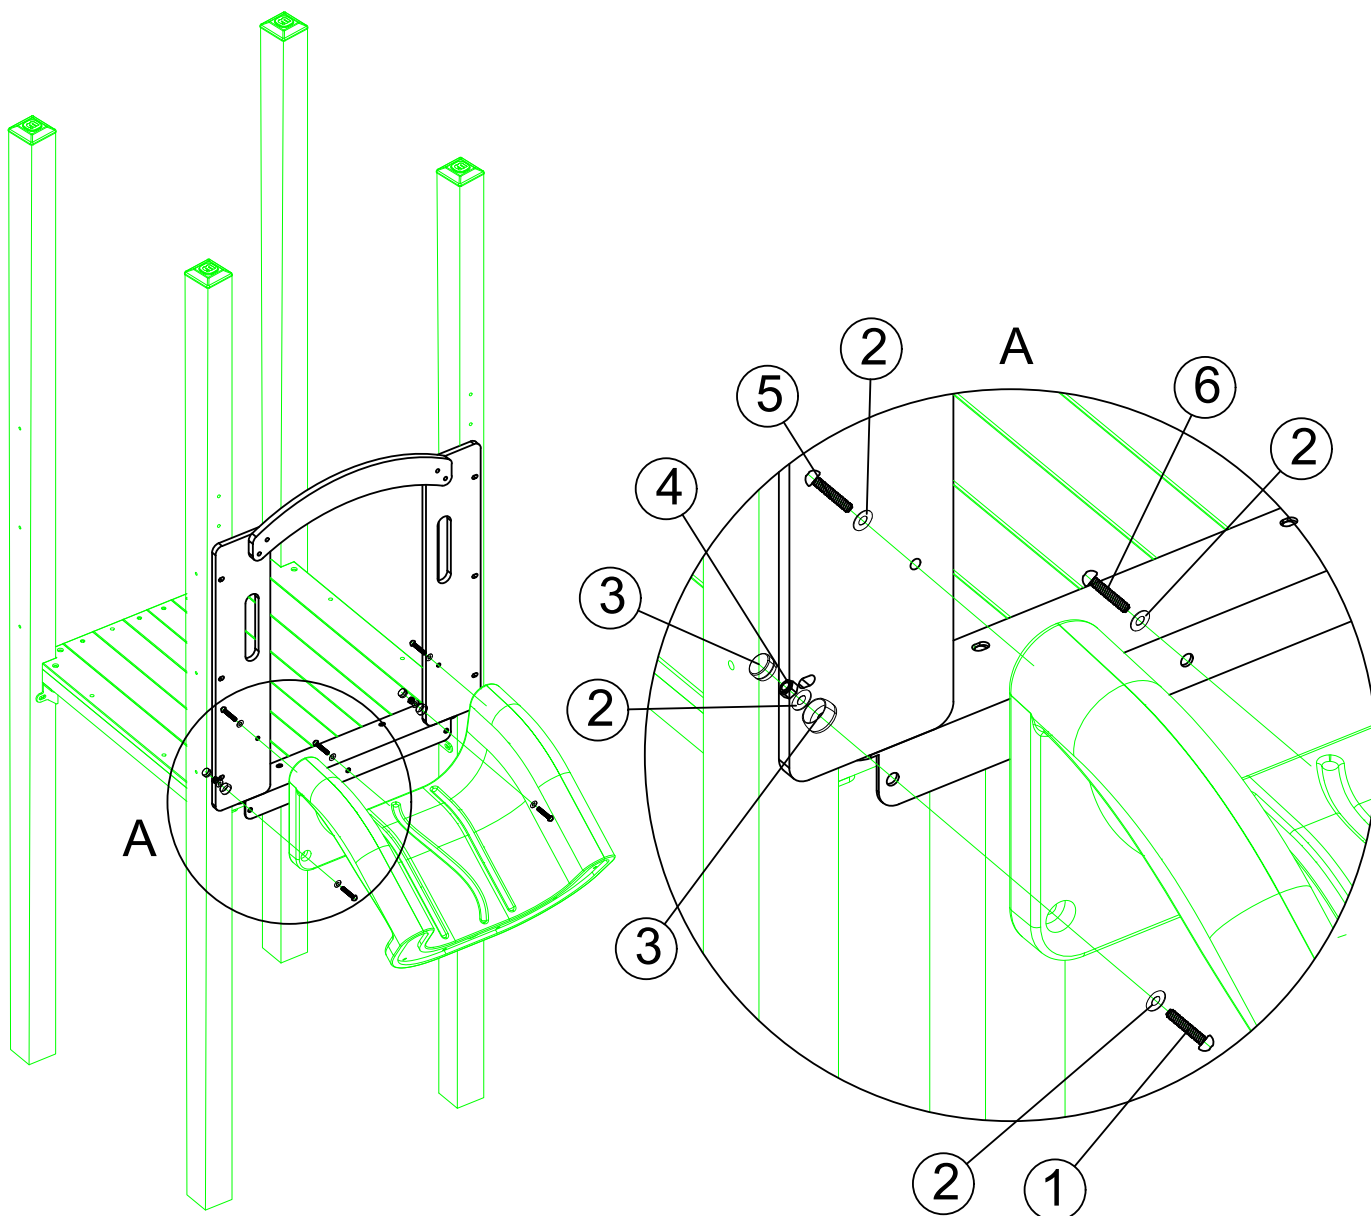

## Installation Steps:

65-WKP001A WiseKidz - 90cm Single Slide

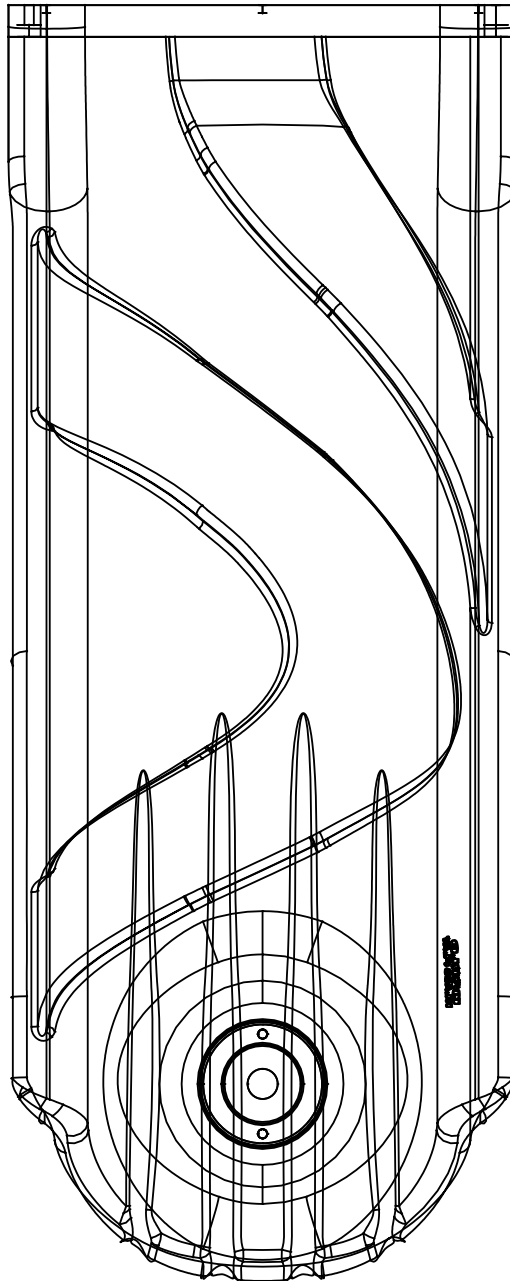


## Installation steps:

1:Align the inground footer with the holes on single slide.

2:Insert corresponding hardware and tighten.

### 70-21001 Single Slide Inground Footer

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*20         | 2        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 2        |

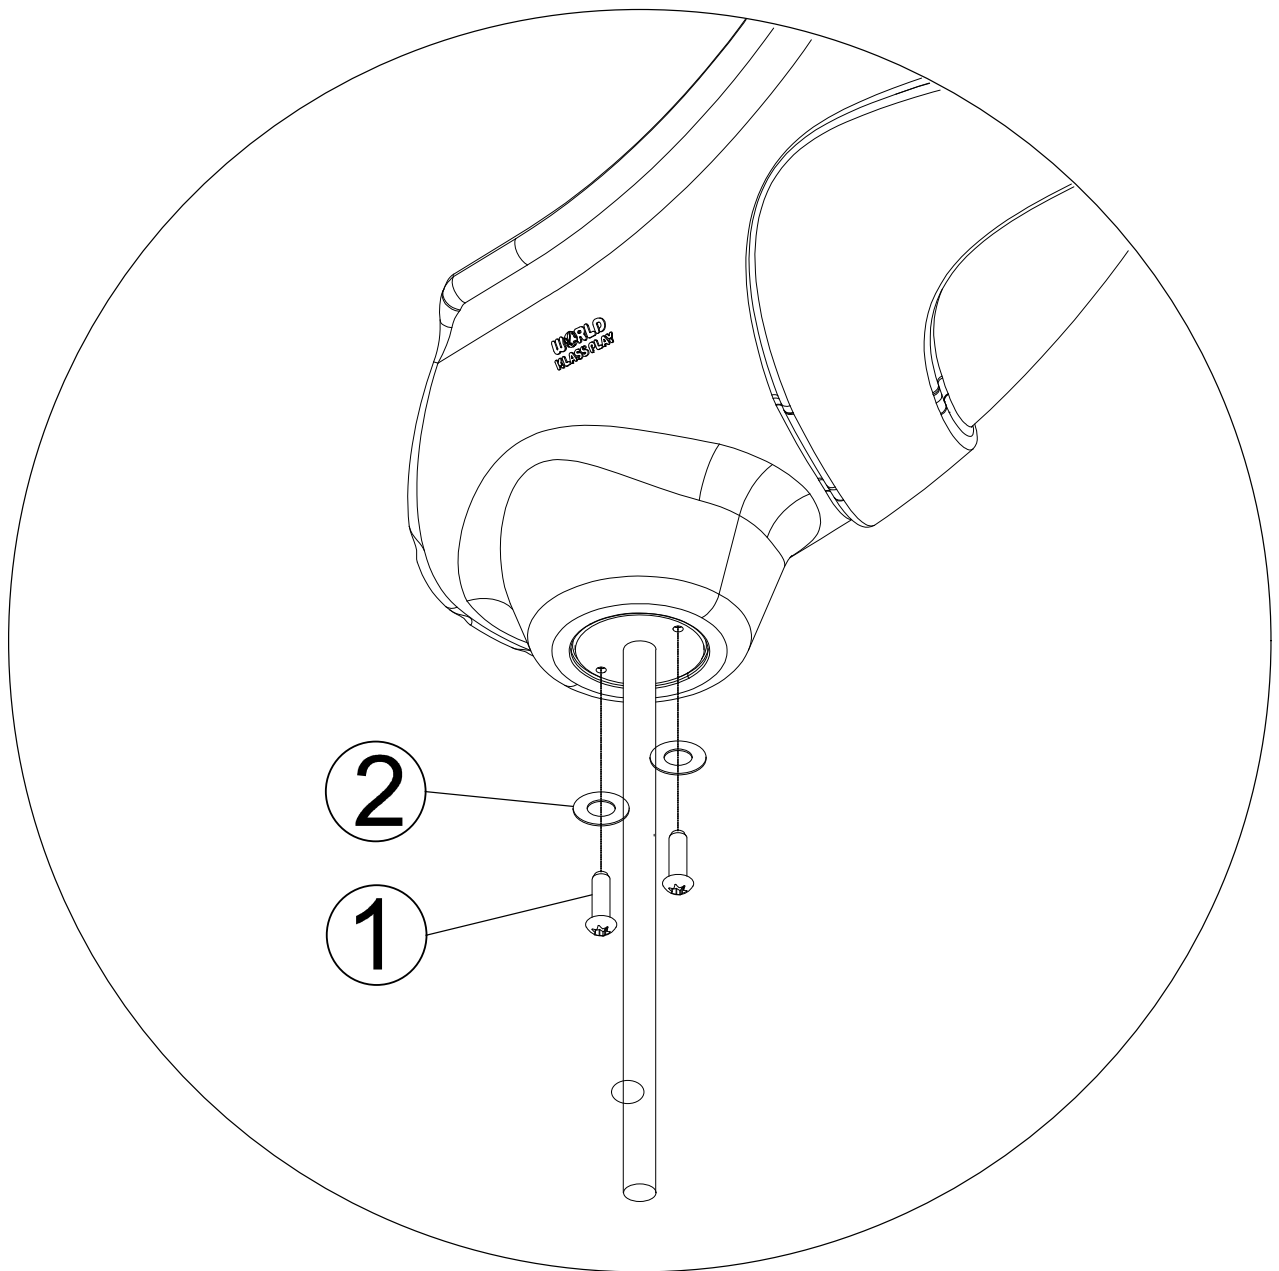


## Installation Steps:

1: As shown in the figure, align the stainless steel connector with the connection holes of the deck, use corresponding hardware to connect and fasten them.

### 66-WK001 WiseKidz - PE Single Slide Hood 1-2

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*75         | 1        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 6        |
| 3      | LOCK NUT                   | PLASTIC CAP   | 3        |
| 4      | PLASTIC CAP                | LOCK NUT      | 3        |
| 5      | TAMPER RESISTANT TORX-BOLT | M8*80         | 2        |

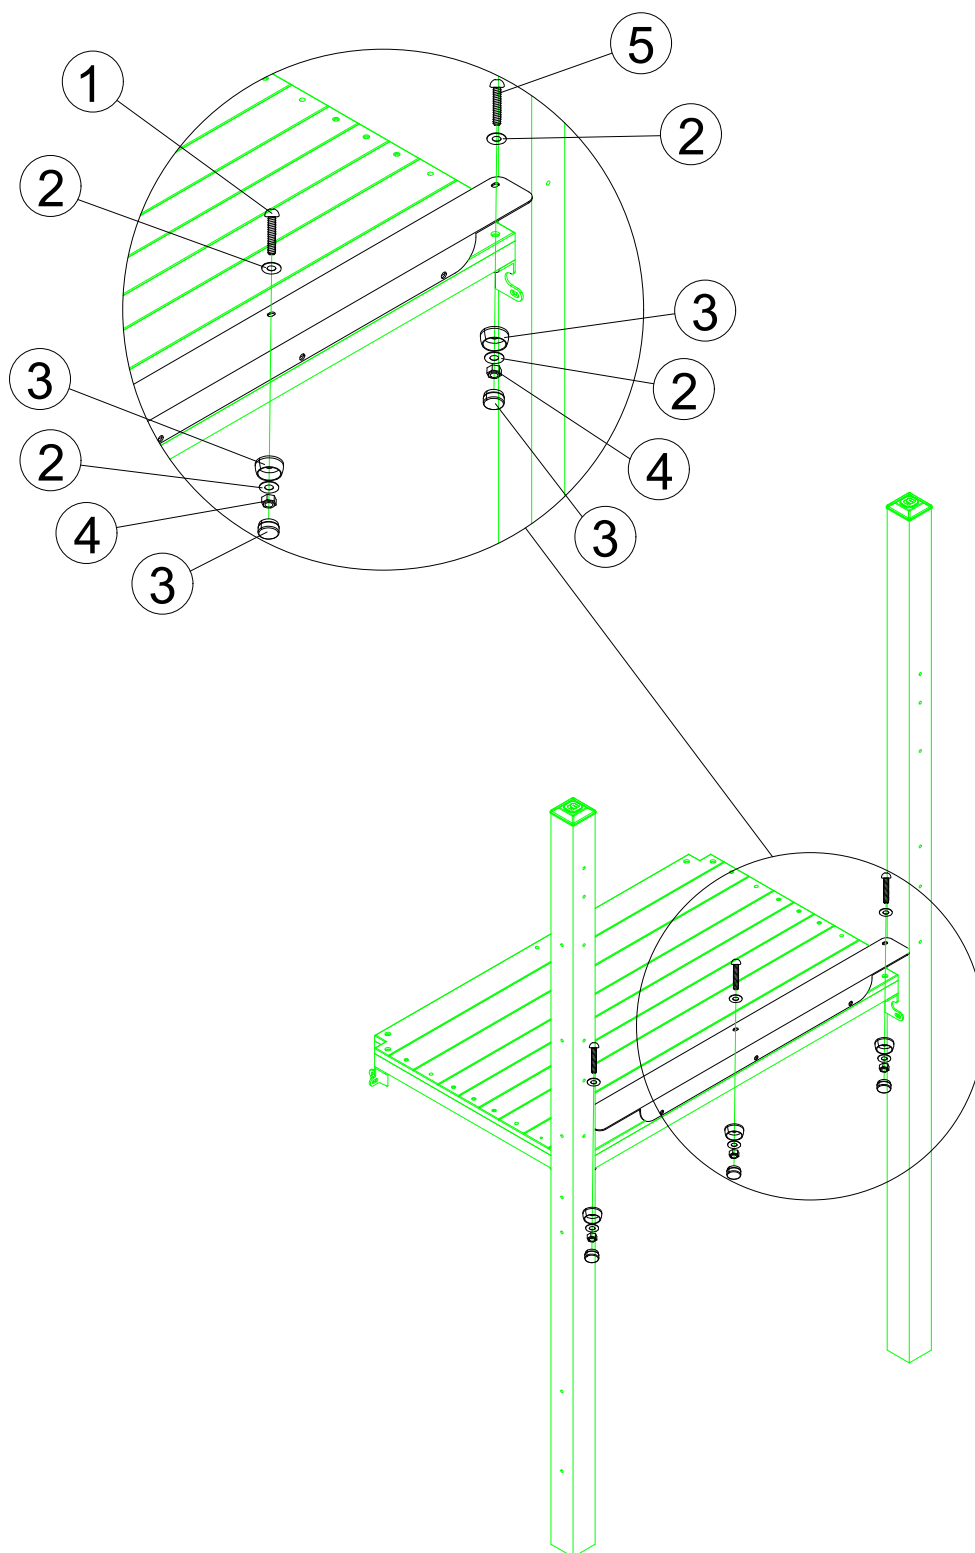


## Installation Steps:

1: As shown in the figure, align the holes of the two side panels with those of the top panel, connect and fasten them with corresponding hardware.

2: As shown in the figure, align the panel with the embedded holes of the post, and use corresponding hardware to connect and fasten them.

### 66-WK001 WiseKidz - PE Single Slide Hood 2-2

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*50         | 4        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 14       |
| 3      | LOCK NUT                   | PLASTIC CAP   | 4        |
| 4      | PLASTIC CAP                | LOCK NUT      | 4        |
| 5      | TAMPER RESISTANT TORX-BOLT | M8*35         | 6        |

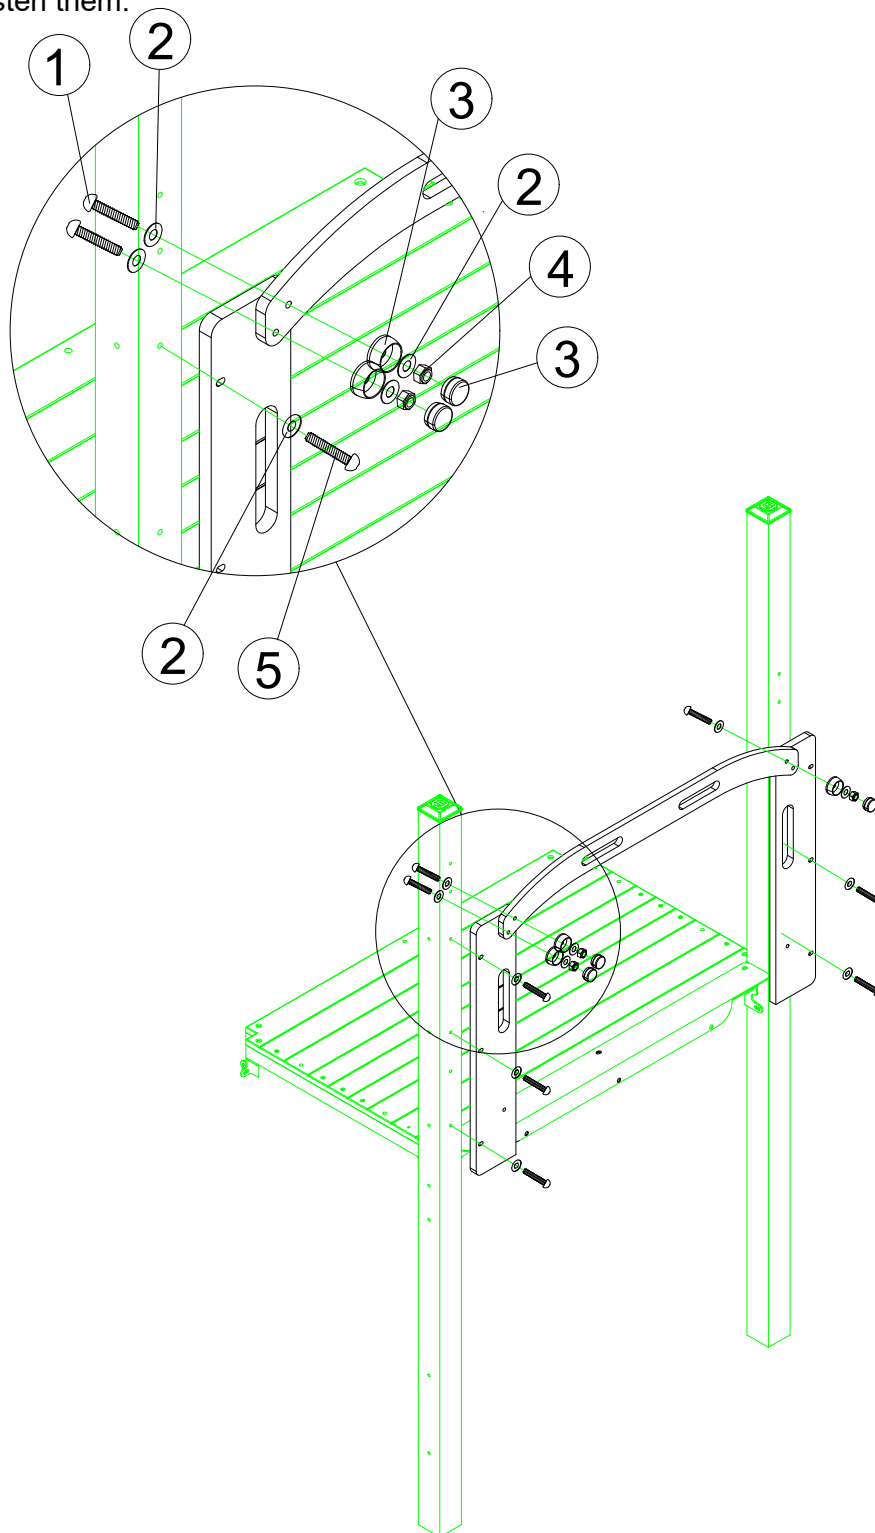




## Installation Steps:

1: As shown in the figure, when installing the slide, align the connection holes of the slide with those of the panel, and use corresponding hardware to connect and fasten them.

### 65-WKP005A WiseKidz - 120cm Double Slide

| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*45         | 3        |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 8        |
| 3      | LOCK NUT                   | PLASTIC CAP   | 3        |
| 4      | PLASTIC CAP                | LOCK NUT      | 3        |
| 5      | TAMPER RESISTANT TORX-BOLT | M8*35         | 2        |

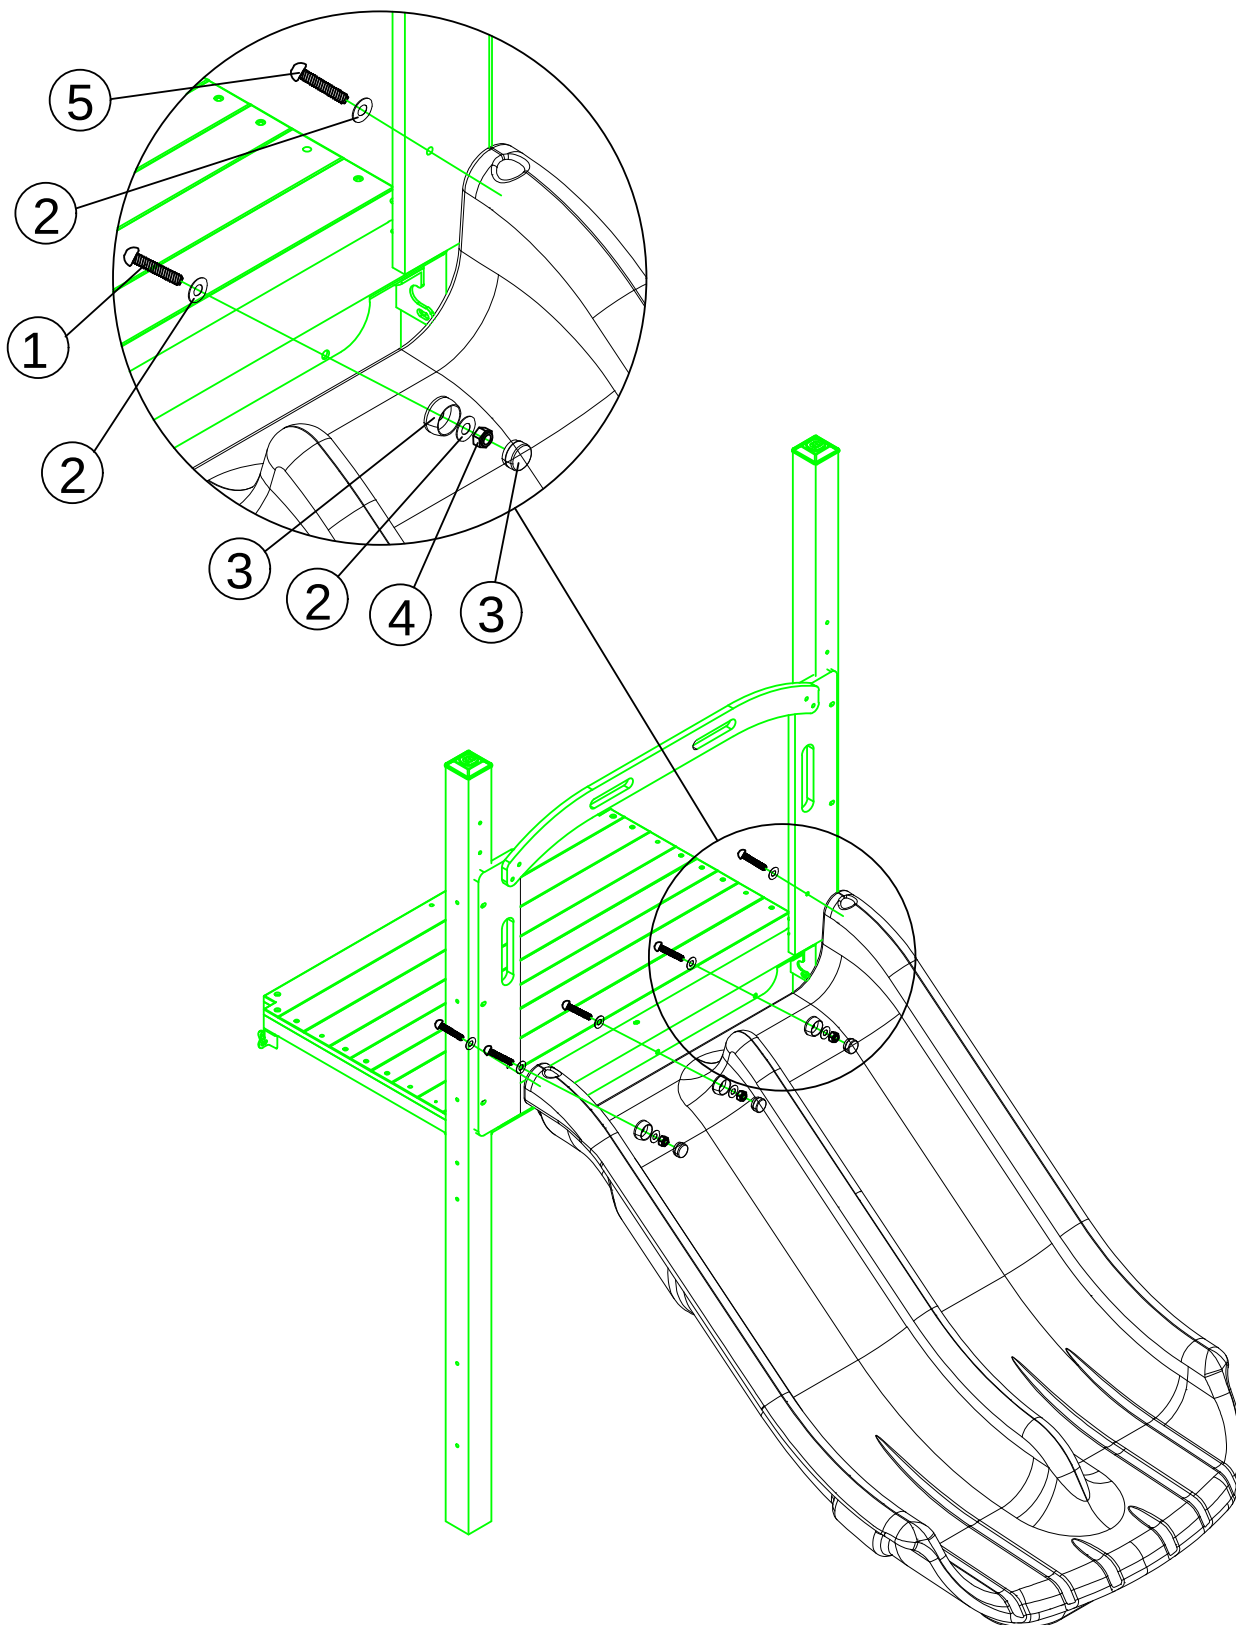


# Installation Steps:

1: Align the inground footer with the holes on double slide.


2: Insert corresponding hardware and tighten.

| 70-21002 Double Slide Inground Footer |                            |               |          |
|---------------------------------------|----------------------------|---------------|----------|
| Number                                | Name                       | Model         | Quantity |
| 1                                     | TAMPER RESISTANT TORX-BOLT | M8*20         | 2        |
| 2                                     | FLAT WASHER                | 8.5/23.5*T1.5 | 2        |

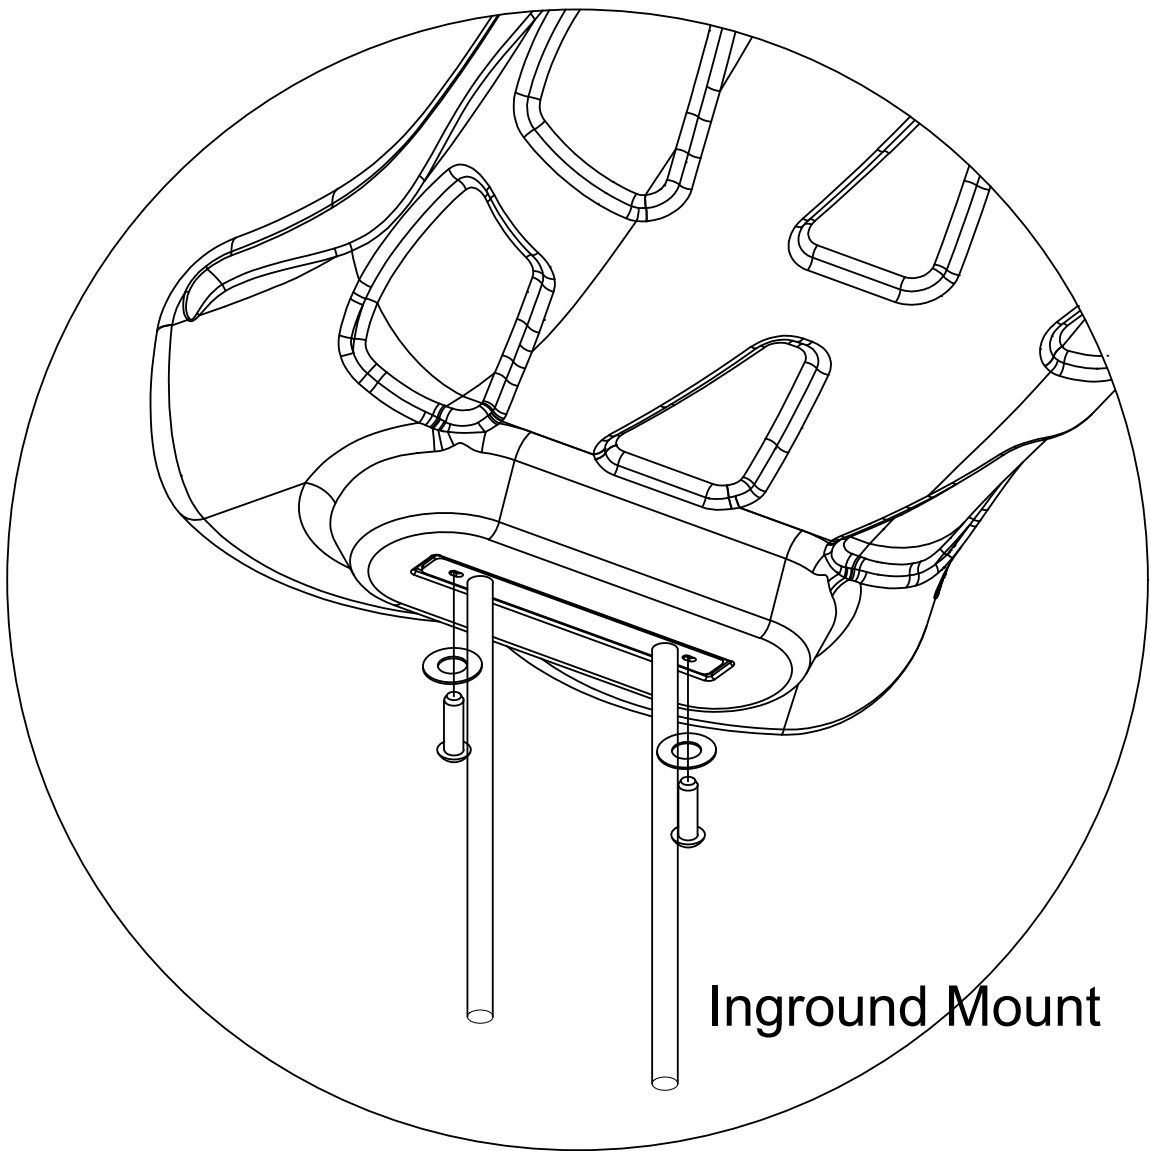


Inground Mount

## Installation steps:

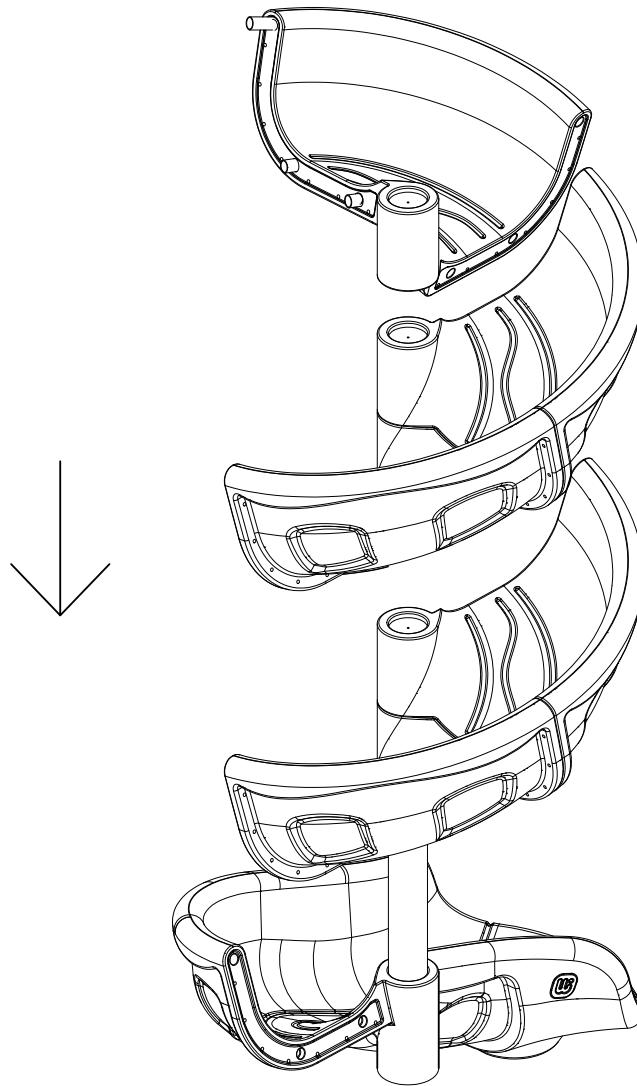


The lower section of the post is for inground mount, and the upper section goes through each chute of Spiral Slide to complete the installation.

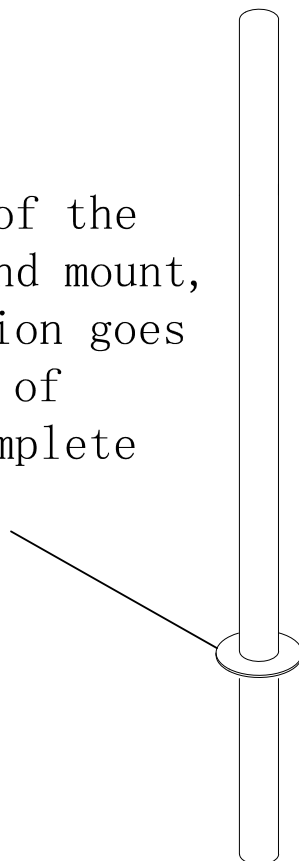

Installation steps:

- 1: Insert positioning tube
- 2: Confirm the location of sectional slide, as shown in the diagram.
- 3: Align the sectional slide with corresponding holes on the slide.
- 4: Insert the corresponding hardware and tighten.


| 65-21055 Spiral Slide 90° Turn Chute |                            |              |          |
|--------------------------------------|----------------------------|--------------|----------|
| Number                               | Name                       | Model        | Quantity |
| 1                                    | TAMPER RESISTANT TORX-BOLT | M10*95       | 7        |
| 2                                    | FLAT WASHER                | 10.5/25*T1.5 | 14       |
| 3                                    | PLASTIC CAP                | φ34*M10      | 7        |
| 4                                    | LOCK NUT                   | M10          | 7        |

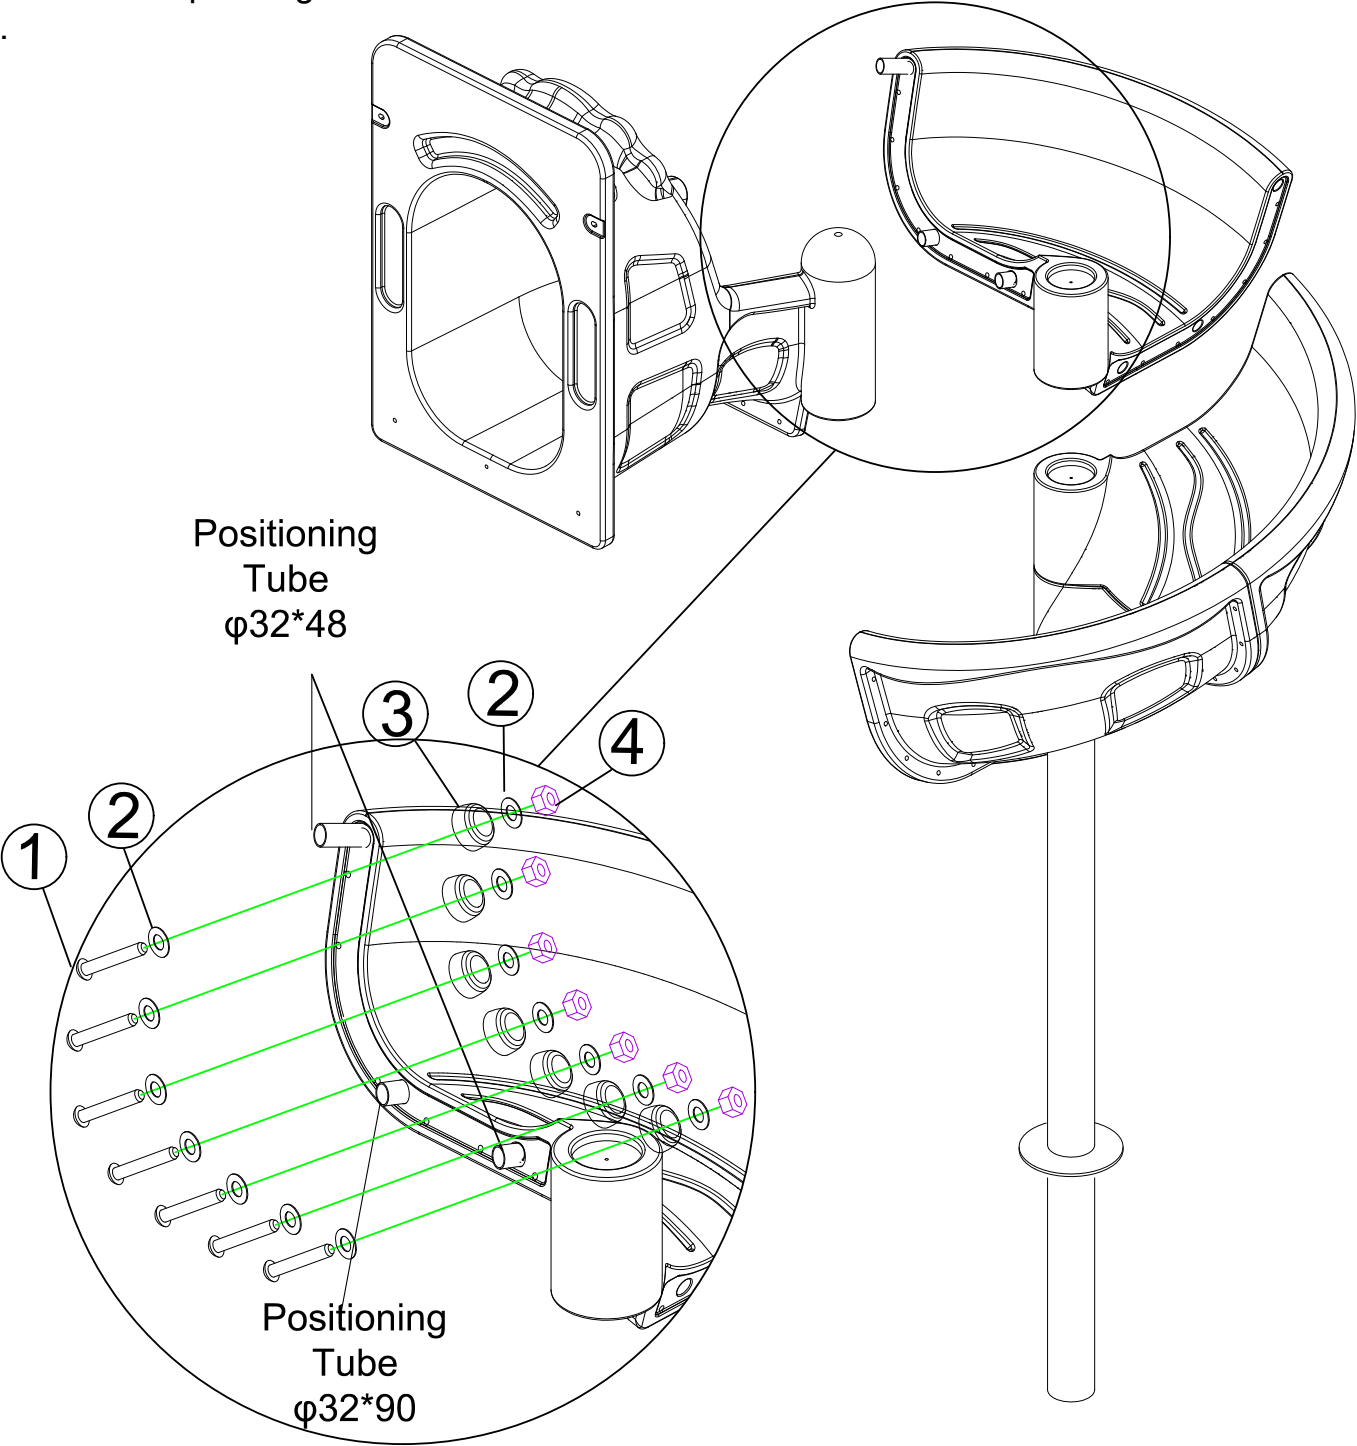

Installation steps:

- 1: Insert positioning tube
- 2: Confirm the location of sectional slide as shown in the diagram.
- 3: Align the sectional slide with corresponding holes on the slide.
- 4: Insert the corresponding hardware and tighten.


| Number | Name                       | Model        | Quantity |
|--------|----------------------------|--------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M10*95       | 7        |
| 2      | FLAT WASHER                | 10.5/25*T1.5 | 14       |
| 3      | PLASTIC CAP                | φ34*M10      | 7        |
| 4      | LOCK NUT                   | M10          | 7        |
|        |                            |              |          |

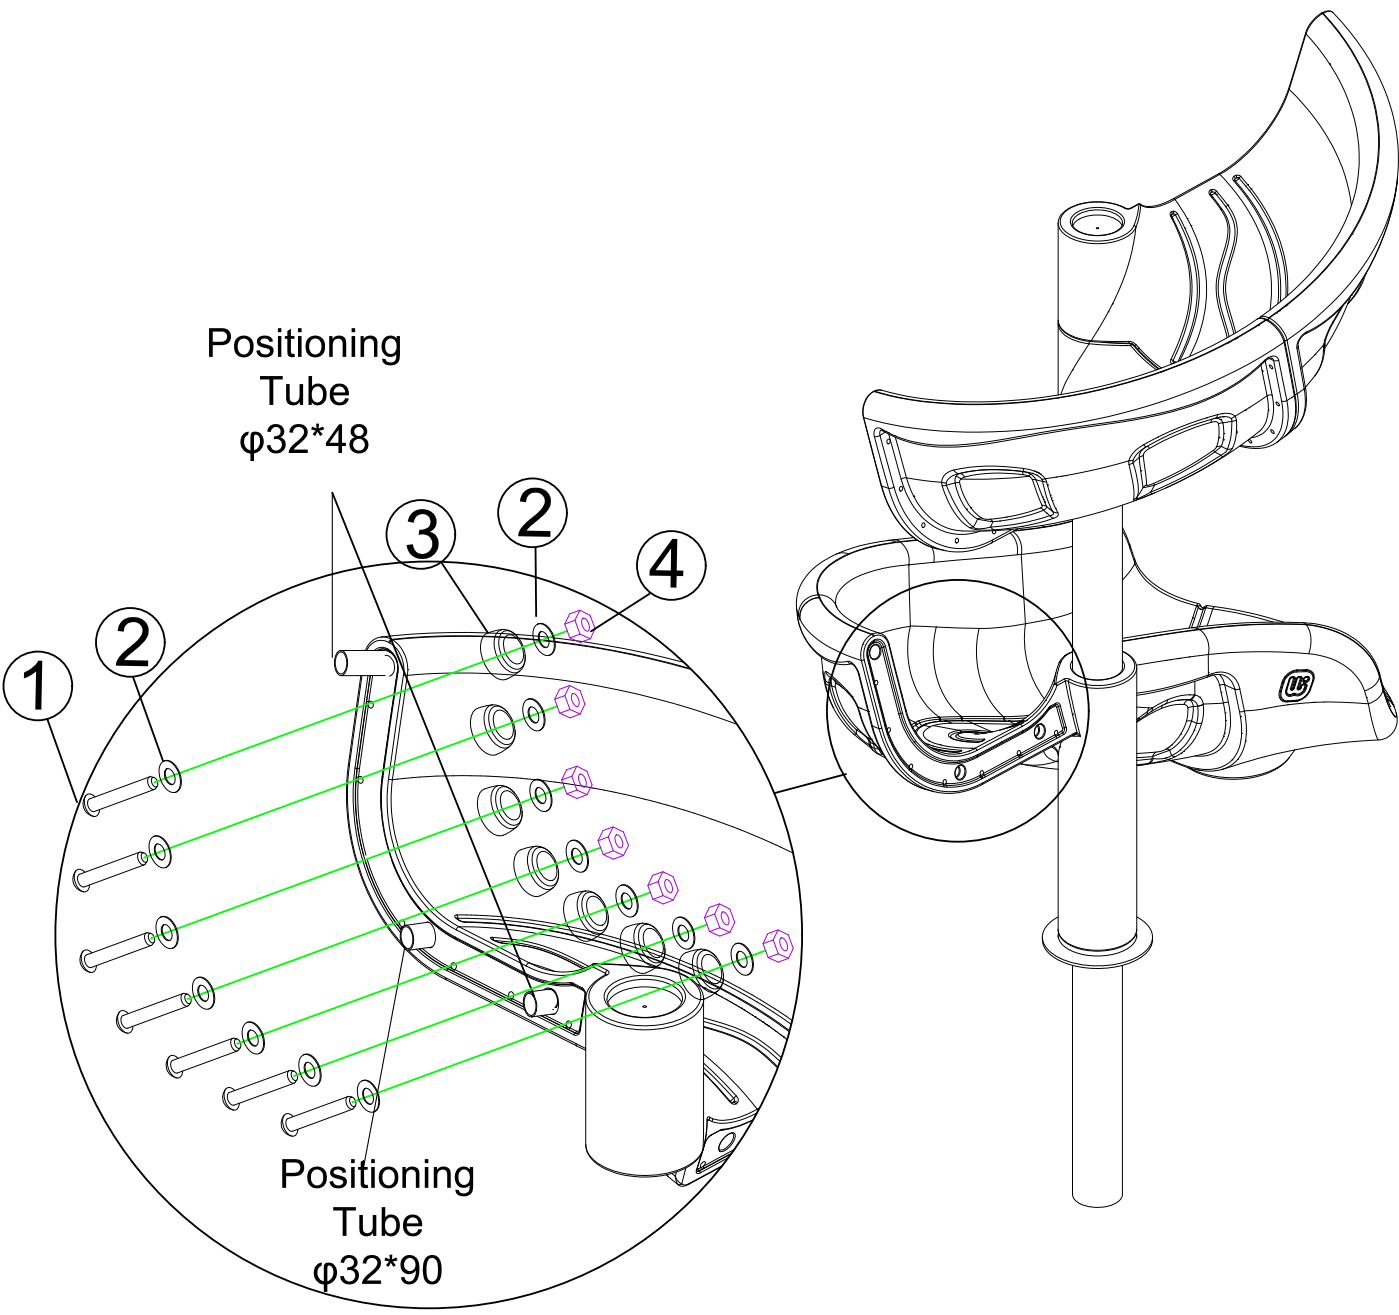

# Installation Steps:

1: As shown in the figure, place the decorative panel in the corresponding position and use corresponding hardware to connect and fasten it.


| 72-WK001 WiseKidz - Post Topper |                    |       |          |
|---------------------------------|--------------------|-------|----------|
| Number                          | Name               | Model | Quantity |
| 1                               | Self-tapping Screw | 4*35  | 3        |

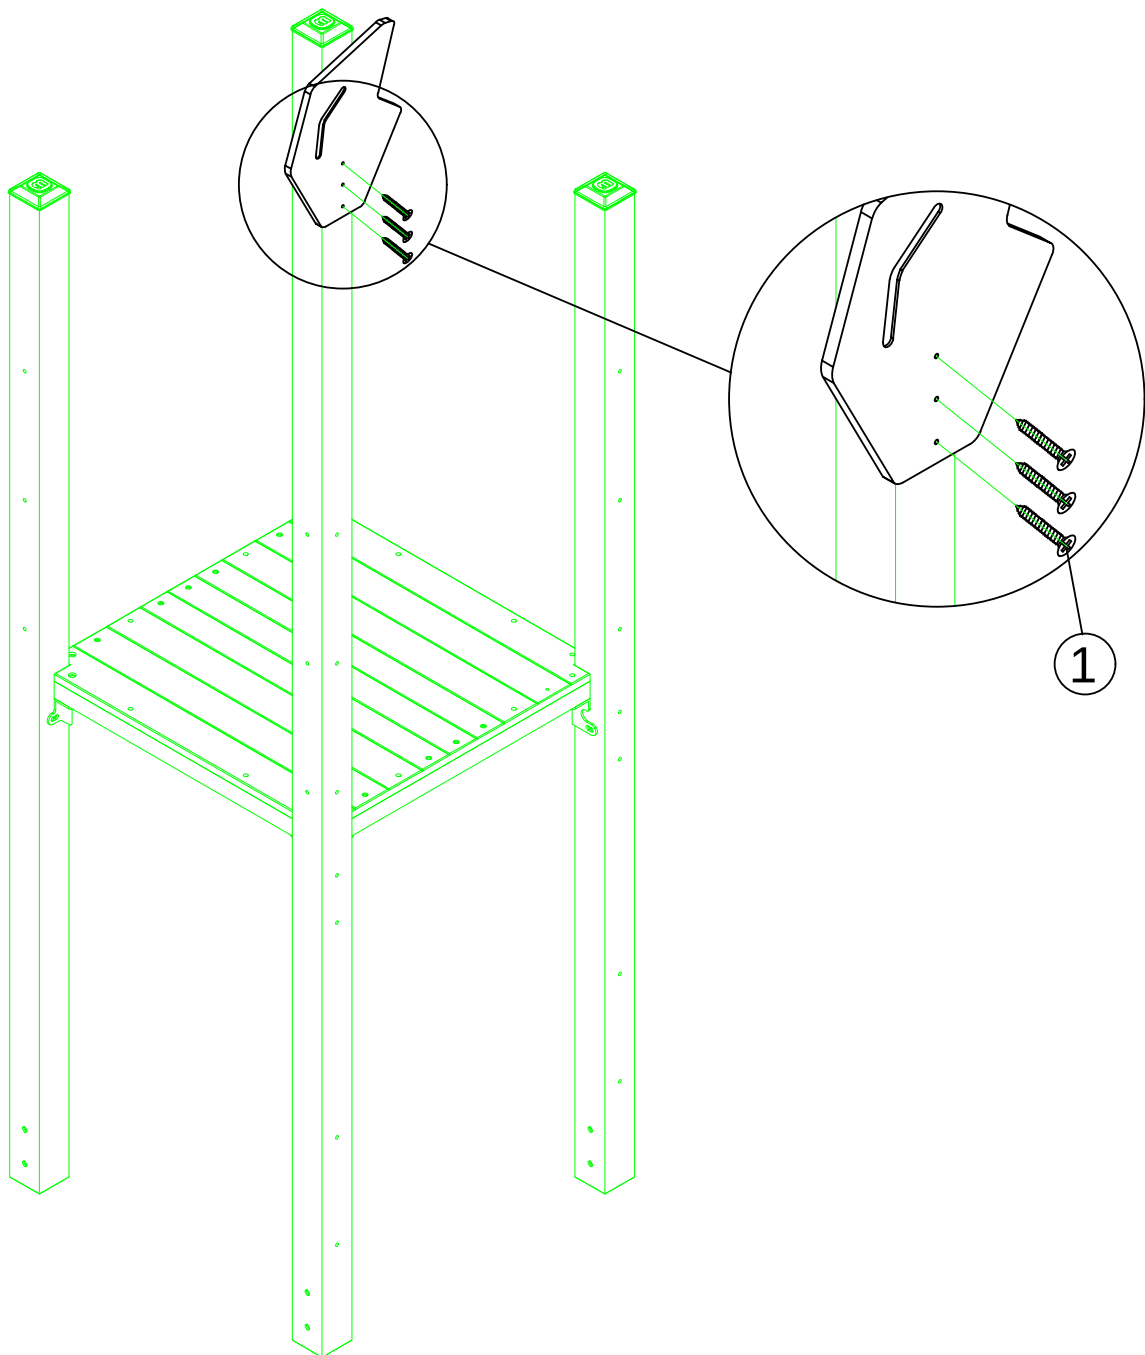

# Installation Steps:

1: As shown in the figure, connect the left roof and the right roof, and use corresponding hardware to connect and fasten them.


| 69-WK002 WiseKidz - Style Gable Roof 1-2 |                            |               |          |
|------------------------------------------|----------------------------|---------------|----------|
| Number                                   | Name                       | Model         | Quantity |
| 1                                        | TAMPER RESISTANT TORX-BOLT | M8*45         | 6        |
| 2                                        | FLAT WASHER                | 8.5/23.5*T1.5 | 12       |
| 3                                        | LOCK NUT                   | M8            | 6        |

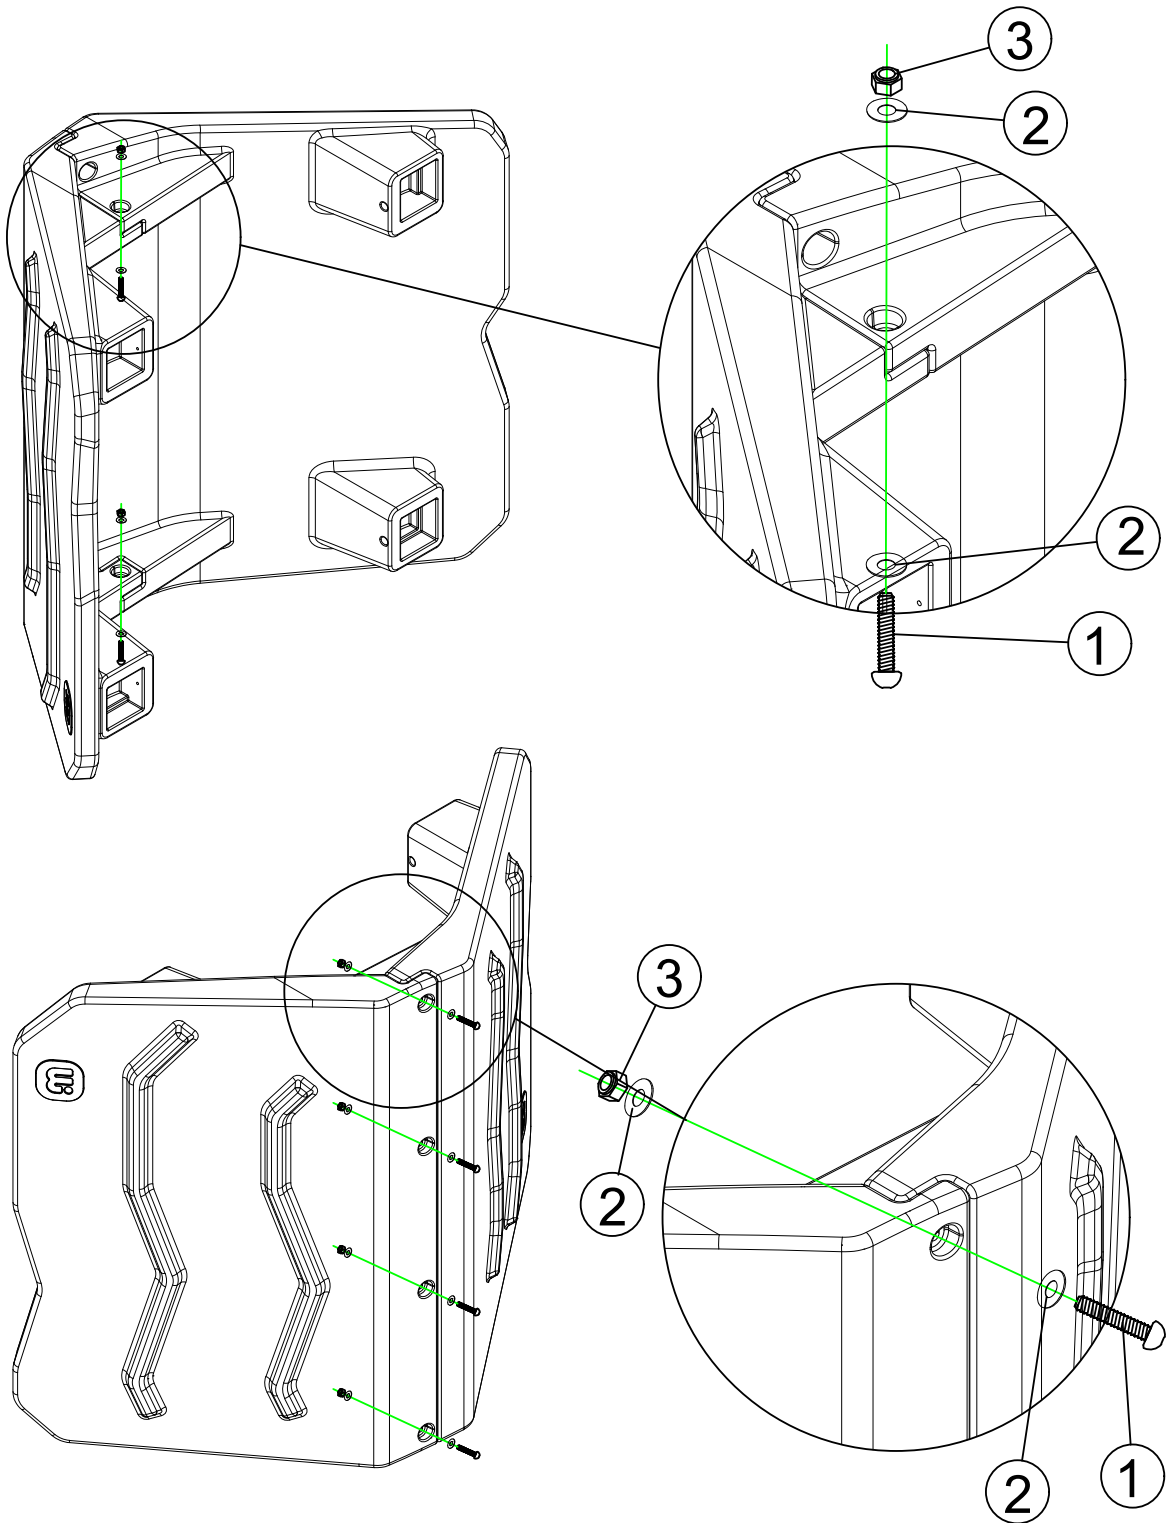

# Installation Steps:

1: As shown in the figure, place the roof on the post and use self-tapping screws to connect and fasten it.

| 69-WK002 WiseKidz - Style Gable Roof 2-2 |                    |         |          |
|------------------------------------------|--------------------|---------|----------|
| Number                                   | Name               | Model   | Quantity |
| 1                                        | Self-tapping Screw | M4.2*32 | 4        |

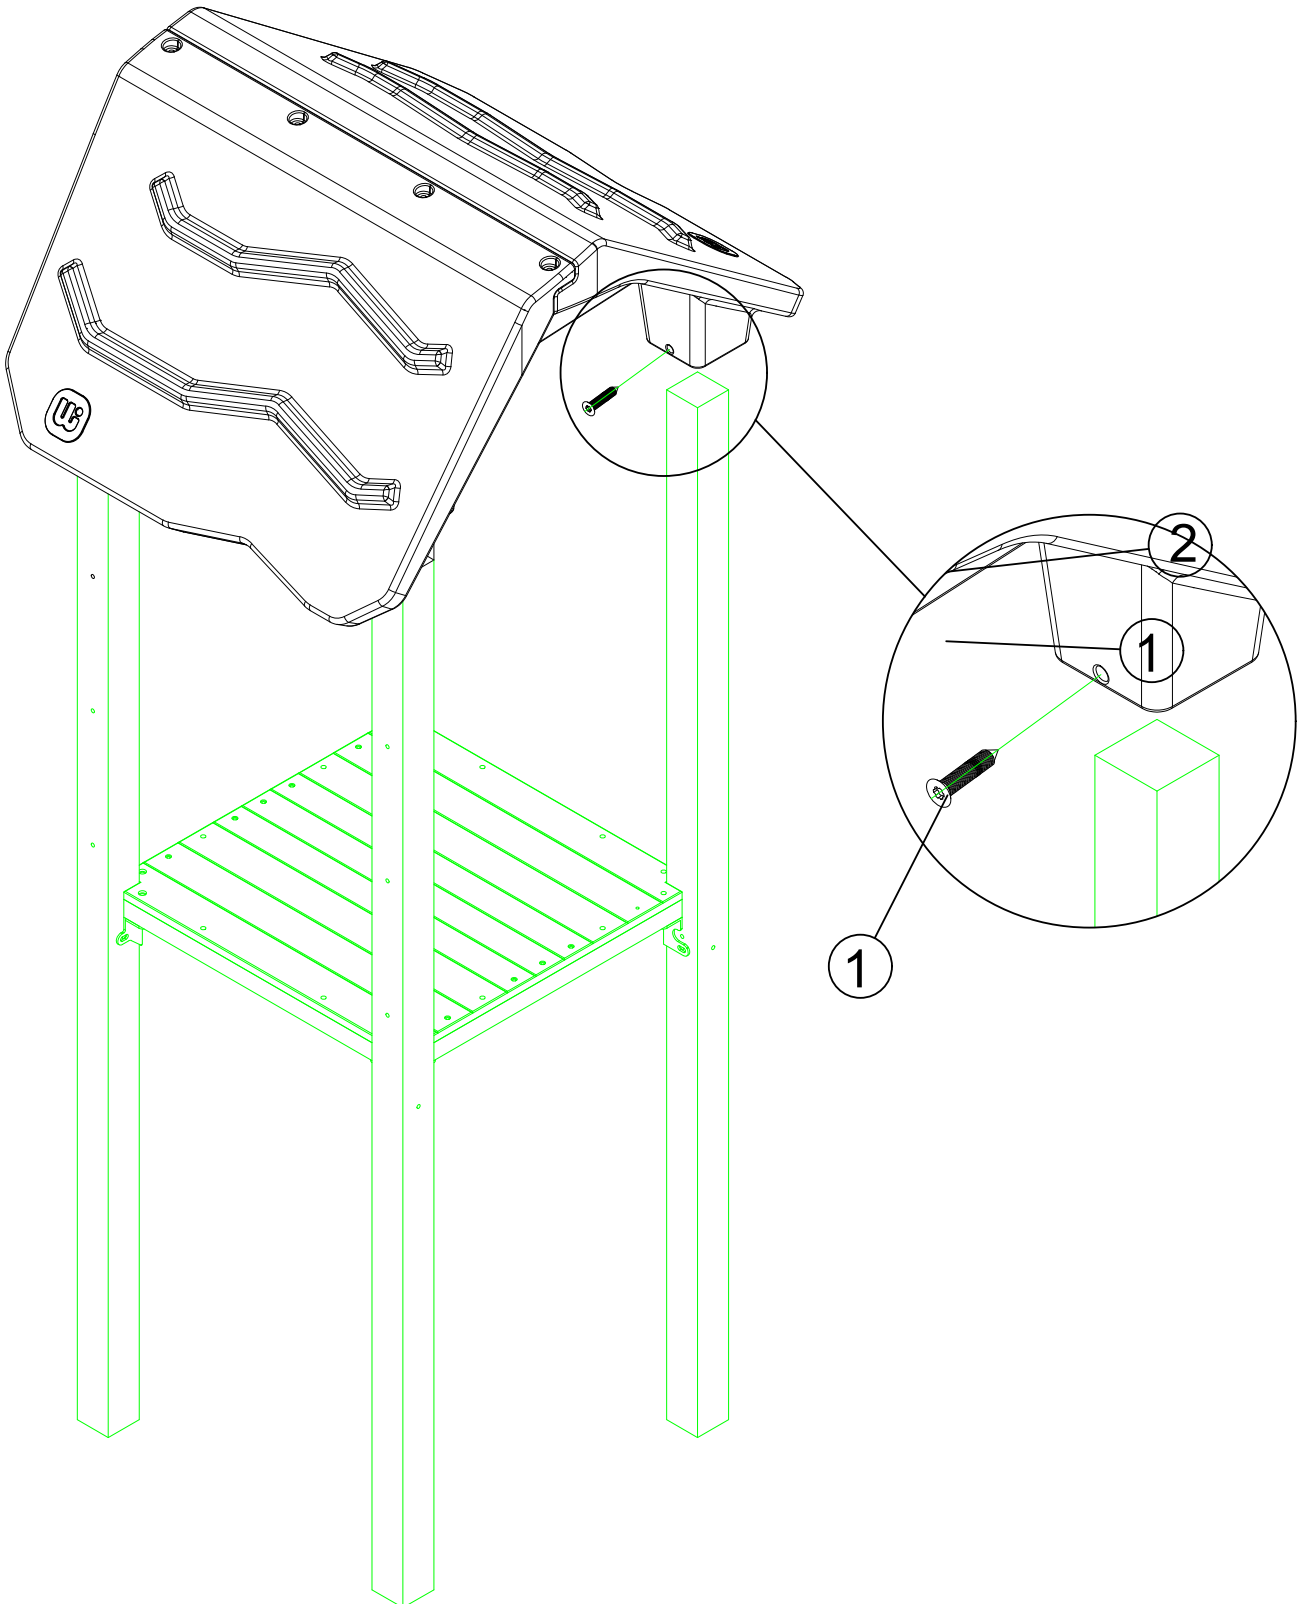




# Installation Steps:

1: As shown in the figure, insert the casing into the post and use corresponding hardware to connect and fasten it.

## 69-WK001 WiseKidz - PE Gable Roof 1-3

| Number | Name               | Model | Quantity |
|--------|--------------------|-------|----------|
| 1      | Self-tapping Screw | M4*20 | 8        |

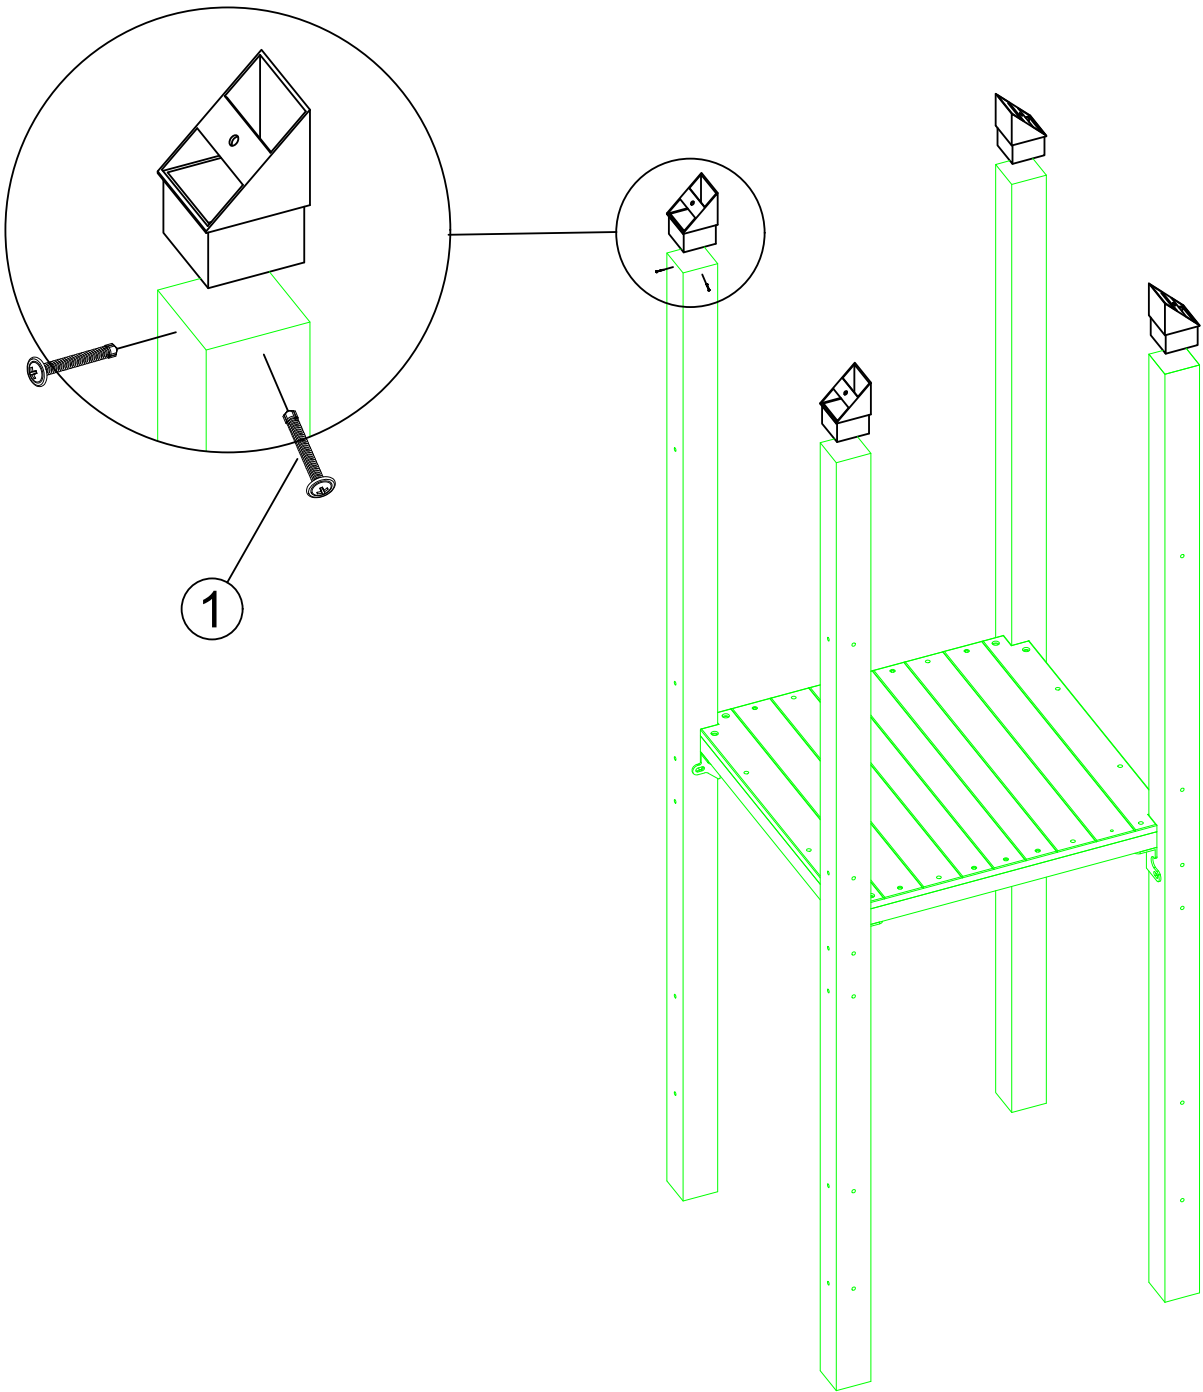


# Installation Steps:

1: As shown in the figure, use corner braces to connect the PE boards. Insert corresponding hardware and tighten.

## 69-WK001 WiseKidz - PE Gable Roof 2-3


| Number | Name                       | Model         | Quantity |
|--------|----------------------------|---------------|----------|
| 1      | TAMPER RESISTANT TORX-BOLT | M8*30         | 14       |
| 2      | FLAT WASHER                | 8.5/23.5*T1.5 | 28       |
| 3      | LOCK NUT                   | M8            | 14       |

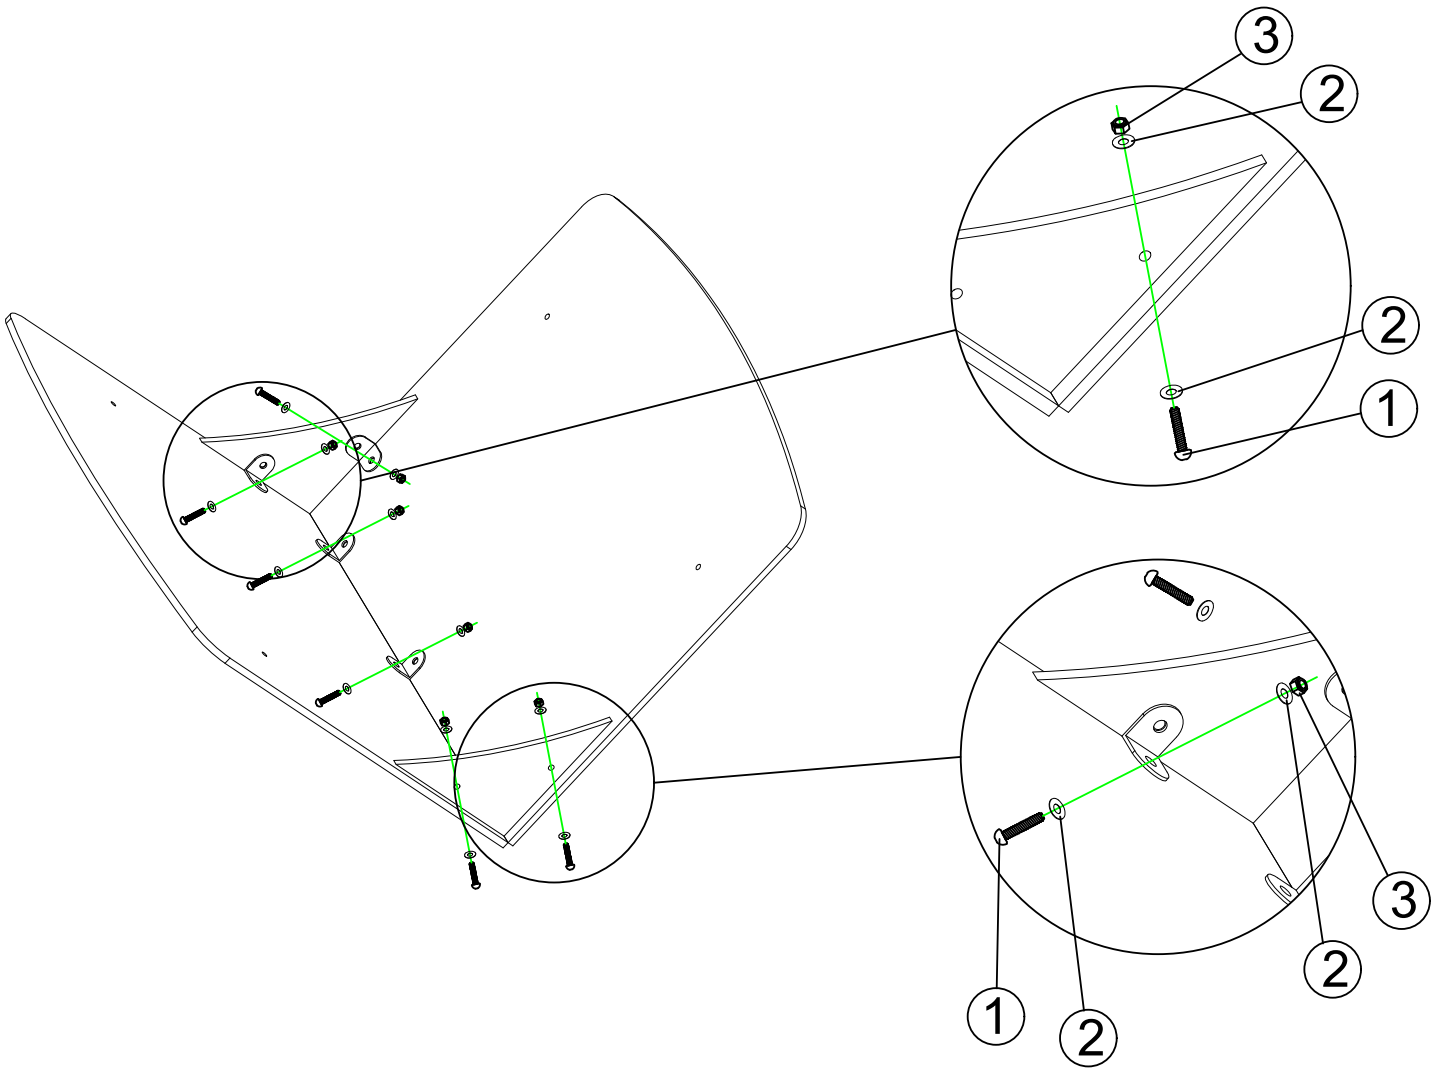

# Installation Steps:

1: As shown in the figure, connect and fasten the installed roof to the post sleeve with corresponding hardware.

| 69-WK001 WiseKidz - PE Gable Roof 3-3 |                            |               |          |
|---------------------------------------|----------------------------|---------------|----------|
| Number                                | Name                       | Model         | Quantity |
| 1                                     | TAMPER RESISTANT TORX-BOLT | M8*30         | 4        |
| 2                                     | FLAT WASHER                | 8.5/23.5*T1.5 | 4        |

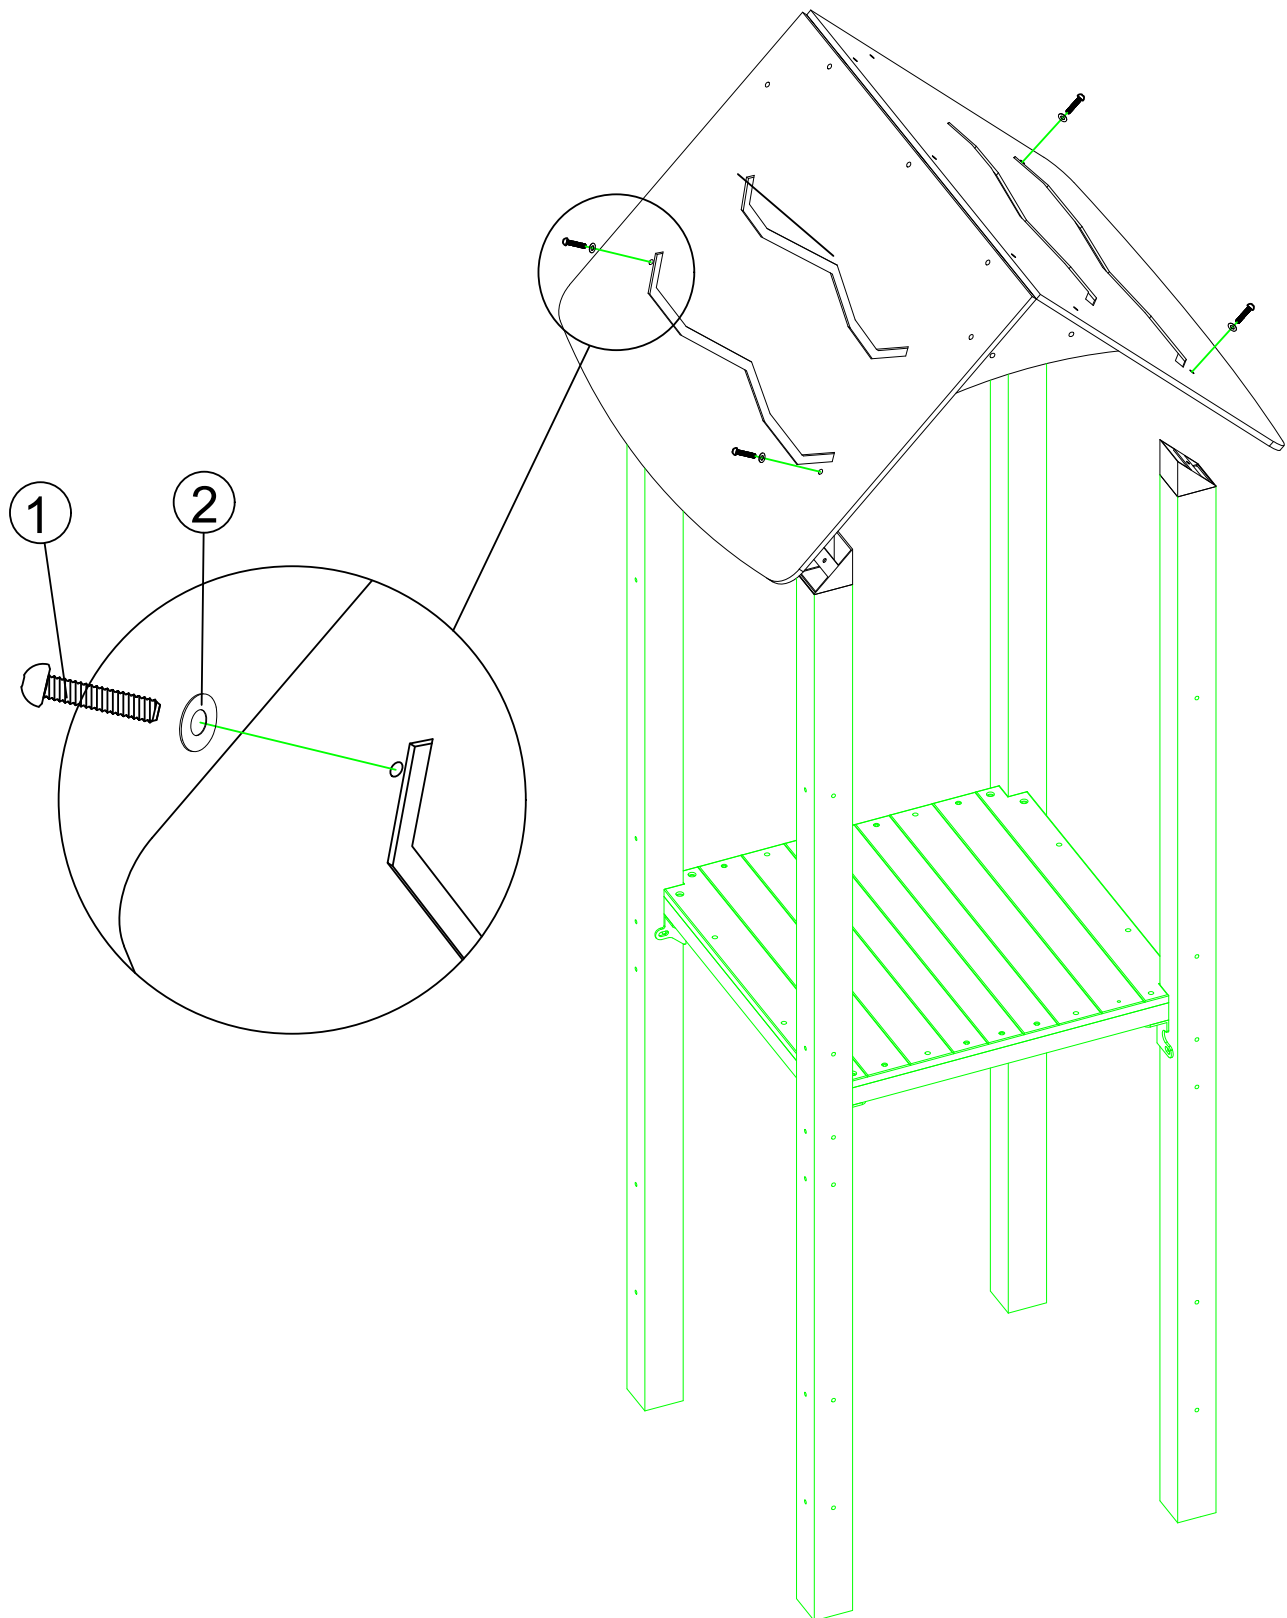

# Inspection record

Carry out the inspections at the specified intervals and document the results.

| Interval                                                                    | Check point                                                                  | YES / NO | Action | Signature |
|-----------------------------------------------------------------------------|------------------------------------------------------------------------------|----------|--------|-----------|
| <b>Daily inspection</b>                                                     | Screws, bolts and fasteners are firmly tightened.                            |          |        |           |
|                                                                             | The equipment stands on a level surface; no hazards are present.             |          |        |           |
|                                                                             | The equipment is free of dirt and moisture.                                  |          |        |           |
|                                                                             | Moving parts and connections are undamaged and securely fastened.            |          |        |           |
|                                                                             | No signs of damage or wear.                                                  |          |        |           |
| <b>Monthly inspection (in addition to the daily inspection)</b>             | Screws are free of rust and damage.                                          |          |        |           |
|                                                                             | All parts are securely connected.                                            |          |        |           |
|                                                                             | Information and compliance labels are intact.                                |          |        |           |
| <b>Annual inspection (in addition to the daily and monthly inspections)</b> | No extensive corrosion; replace affected parts if necessary.                 |          |        |           |
|                                                                             | No cracks or damage to connecting parts; replace if necessary.               |          |        |           |
|                                                                             | No excessive discolouration of components.                                   |          |        |           |
|                                                                             | Screws and connecting elements are in working order, undamaged and not worn. |          |        |           |
|                                                                             | Information labels are legible.                                              |          |        |           |
|                                                                             | The play area under the equipment is safe and level.                         |          |        |           |

Date of inspection: \_\_\_\_\_

Carried out by: \_\_\_\_\_



## Thank you for your trust!

If you have any questions about assembly, maintenance or spare parts,  
we are happy to help.

---

### **WISDOM Education Europe GmbH**

schönherr.fabrik · Schönherrstraße 8 · 09113 Chemnitz · Germany  
Phone: +49 (0) 37360 488 999 · E-mail: [hello@wisdomeurope.eu](mailto:hello@wisdomeurope.eu)  
[www.wisdomeurope.eu](http://www.wisdomeurope.eu)